

Cisco

Exam Questions 300-620

Implementing Cisco Application Centric Infrastructure (DCACI)



NEW QUESTION 1

Which type of policy configures the suppression of faults that are generated from a port being down?

- A. fault lifecycle assignment
- B. event lifecycle assignment
- C. fault severity assignment
- D. event severity assignment

Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/all/faults/guide/b_APIC_Faults_Errors/b_IFC_Faults_Errors_chapter_01.html

NEW QUESTION 2

A RADIUS user resolves its role via the Cisco AV Pair. What object does the Cisco AV Pair resolve to?

- A. tenant
- B. security domain
- C. primary Cisco APIC
- D. managed object class

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 3

Which feature dynamically assigns or modifies the EPG association of virtual machines based on their attributes?

- A. vzAny contracts
- B. standard contracts
- C. application EPGs
- D. uSeg EPGs

Answer: D

NEW QUESTION 4

Where is the COOP database located?

- A. leaf
- B. spine
- C. APIC
- D. endpoint

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 5

Which description regarding the initial APIC cluster discovery process is true?

- A. The APIC uses an internal IP address from a pool to communicate with the nodes.
- B. Every switch is assigned a unique AV by the APIC.
- C. The APIC discovers the IP address of the other APIC controllers by using Cisco Discovery Protocol.
- D. The ACI fabric is discovered starting with the spine switches.


Answer: C

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_010011.html

NEW QUESTION 6

Refer to the exhibit.

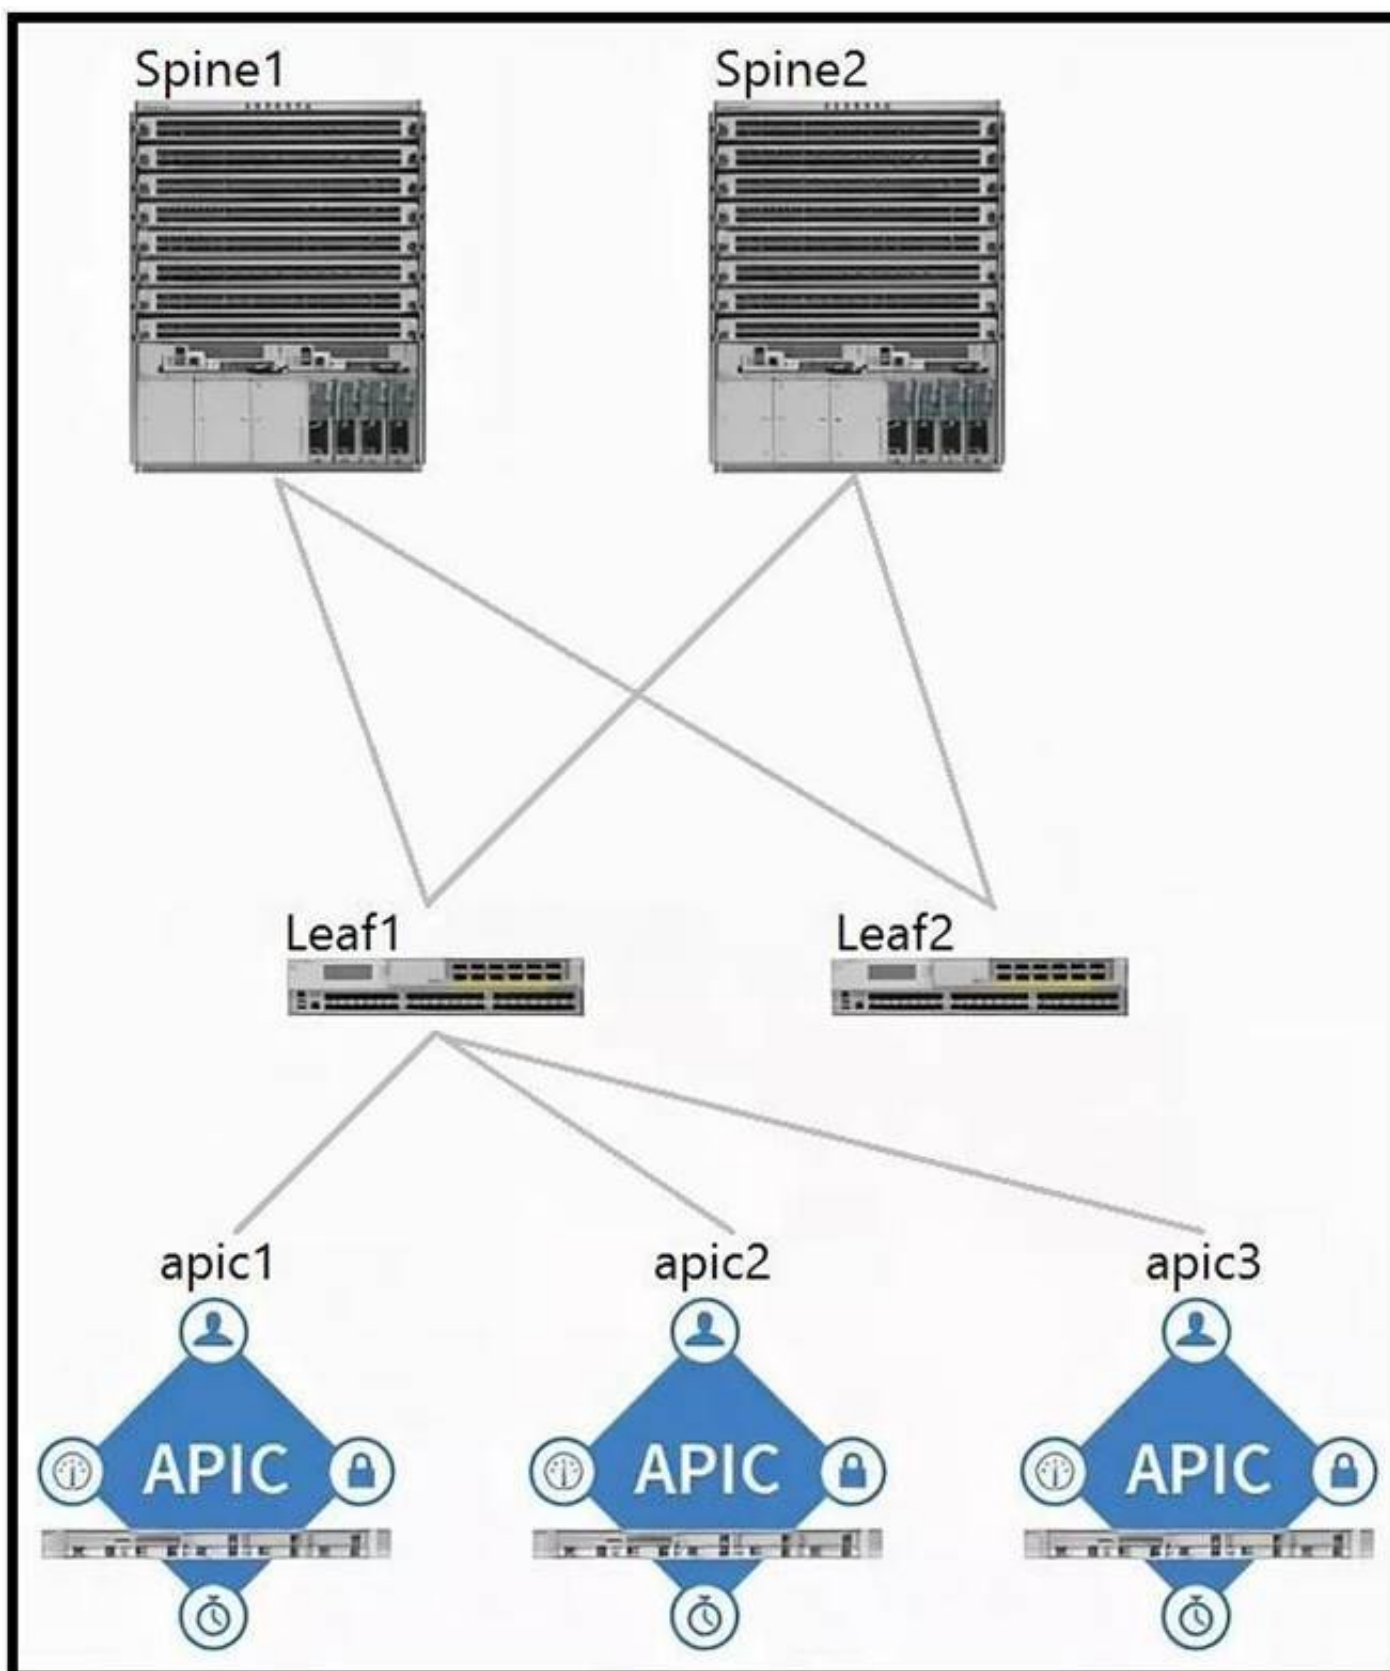

Which two components should be configured as route reflectors in the ACI fabric? (Choose two.)

- A. Spine1
- B. apic1
- C. Spine2
- D. Leaf1
- E. Leaf2
- F. apic2

Answer: AC

NEW QUESTION 7

Which table holds IP address, MAC address and VXLAN/VLAN information on a Cisco ACI leaf?

- A. endpoint
- B. adjacency
- C. RIB
- D. ARP

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739989.html>

NEW QUESTION 8

An engineer is extending an EPG out of the ACI fabric using static path binding. Which statement about the endpoints is true?

- A. Endpoints must connect directly to the ACI leaf port.
- B. External endpoints are in a different bridge domain than the endpoints in the fabric.
- C. Endpoint learning encompasses the MAC address only.
- D. External endpoints are in the same EPG as the directly attached endpoints.

Answer: C

NEW QUESTION 9

Which setting prevents the learning of Endpoint IP addresses whose subnet does not match the bridge domain subnet?

- A. "Limit IP learning to network" setting within the bridge domain.
- B. "Limit IP learning to subnet" setting within the EPG.
- C. "Limit IP learning to network" setting within the EPG.
- D. "Limit IP learning to subnet" setting within the bridge domain.

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/L2_config/b_Cisco_APIC_Layer_2_Configuration_Guide/b_Cisco_APIC_Layer_2_Configuration_Guide_chapter_010.html

NEW QUESTION 10

Regarding the MTU value of MP-BGP EVPN control plane packets in Cisco ACI, which statement about communication between spine nodes in different sites is true?

- A. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- B. As a result, the Inter-Site network should be able to carry 9000-bytes packets.
- C. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- D. As a result, the Inter-Site network should be able to carry 1800-bytes packets.
- E. By default, spine nodes generate 1500-bytes packets to exchange endpoints routing informatio
- F. As a result, the Inter-Site network should be able to carry 1500-bytes packets.
- G. By default, spine nodes generate 9000-bytes packets to exchange endpoints routing informatio
- H. As a result, the Inter-Site network should be able to carry 9100-bytes packets.

Answer: D

NEW QUESTION 10

Refer to the exhibit.

Terminate Nodes:		Provider/Consumer	
Name			
T1		Consumer	
T2		Provider	

Connections:	Name	Connected Nodes	Direct Connect	Unicast Route	Adjacency Type
C1	N1, T1	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
C2	N1, T2	False			

Update Cancel

Which Adjacency Type value should be set when the client endpoint and the service node interface are in a different subnet?

- A. Routed
- B. Unicast
- C. L3Out
- D. L3

Answer: D

NEW QUESTION 14

Refer to the exhibit.

Create vCenter Domain

vCenter Credentials:

Profile name	Username	Description
Lab-VCenter	admin	

vCenter:

Name	IP	Type	Stats Collection
Lab-VCenter	vcenter.aci.lab	vCenter	Disabled

Port Channel Mode:

select a value

Static Channel – Mode On

LACP Active

LACP Passive

MAC Pinning+

MAC Pinning-Physical-NIC-load

Cancel

Submit

An engineer is implementing Cisco ACI – VMware vCenter integration for a blade server that lacks support of bonding. Which port channel mode results in “route based on originating virtual port” on the VMware VDS?

- A. Static Channel – Mode On
- B. MAC Pinning-Physical-NIC-load
- C. LACP Passive
- D. MAC Pinning+
- E. LACP Active

Answer: D

NEW QUESTION 16

DRAG DROP

Drag and drop the Cisco ACI Layer 4 to Layer 7 service insertion terms on the left to the correct descriptions on the right.

concrete interfaces	ensures reachability between L3 domains
service graph	rendered with local resources that are available in the fabric
device cluster	contains an active-standby pair of firewalls or load balancers
VRF stitching	encapsulations programmed based on their association with logical interfaces

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

concrete interfaces	VRF stitching
service graph	service graph
device cluster	device cluster
VRF stitching	concrete interfaces

NEW QUESTION 21

An engineer has set the VMM resolution immediacy to pre-provision in a Cisco ACI environment. No Cisco Discovery Protocol neighborhood has been formed between the hypervisors and the ACI fabric leaf nodes. How does this affect the download policies to the leaf switches?

- A. No policies are downloaded because LLDP is the only supported discovery protocol.

- B. Policies are downloaded when the hypervisor host is connected to the VMM VDS.
- C. Policies are downloaded to the ACI leaf switch regardless of Cisco Discovery Protocol neighborhood.
- D. No policies are downloaded because there is no discovery protocol neighborhood.

Answer: C

NEW QUESTION 22

In the context of VMM, which protocol between ACI leaf and compute hosts ensures that the policies are pushed to the leaf switches for immediate and on demand resolution immediacy?

- A. VXLAN
- B. LLDP
- C. ISIS
- D. STP

Answer: A

Explanation:

Reference:

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/ACI_Best_Practices/b_ACI_Best_Practices/b_ACI_Best_Practices_chapter_0101.html

NEW QUESTION 25

What represents the unique identifier of an ACI object?

- A. universal resource identifier (URI)
- B. application programming interface
- C. management information tree
- D. distinguished name

Answer: D

Explanation:

Reference: <https://www.slideshare.net/CiscoDevNet/introduction-to-aci-apis>

NEW QUESTION 30

Which new construct must a user create when configuring in-band management?

- A. VLAN pool
- B. management contract
- C. management tenant
- D. bridge domain

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/kb/b_KB_Configuring_Static_Management_Access.html

NEW QUESTION 35

Which type of port is used for in-band management within ACI fabric?

- A. spine switch port
- B. APIC console port
- C. leaf access port
- D. management port

Answer: C

NEW QUESTION 37

Refer to the exhibit.

Edit Stats Threshold

transmit B2B credit cumulative

Normal Value:

Threshold Direction: Both **Rising** Falling

Rising Thresholds to Config: ☒ ☐

☒ Critical
☐ Major
☐ Minor
☒ Warning

Rising

	Set	Reset
Critical	<input type="text" value="500"/>	<input type="text"/>
Major		
Minor		
Warning	<input type="text" value="400"/>	<input type="text" value="300"/>

A client reports that the ACI domain connectivity to the fiber channel storage is experiencing a B2B credit oversubscription. The environment has a SYSLOG server for state collection messages. Which value should be chosen to clear the critical fault?

- A. 300
- B. 410
- C. 350
- D. 510

Answer: B

NEW QUESTION 41

Which two protocols support accessing backup files on a remote location from the APIC? (Choose two.)

- A. TFTP
- B. FTP
- C. SFTP
- D. SMB
- E. HTTPS

Answer: BC

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/troubleshooting/b_APIC_Troubleshooting/b_APIC_Troubleshooting_appendix_010011.html

NEW QUESTION 44

Which attribute should be configured for each user to enable RADIUS for external authentication in Cisco ACI?

- A. cisco-security domain
- B. cisco-auth-features
- C. cisco-aci-role
- D. cisco-av-pair

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/Security_config/b_Cisco_APIC_Security_Configuration_Guide/b_Cisco_API_C_Security_Guide_chapter_01011.html

NEW QUESTION 48

In the context of ACI Multi-Site, when is the information of an endpoint (MAC/IP) that belongs to site 1 advertised to site 2 using the EVPN control plane?

- A. Endpoint information is not exchanged across sites unless COOP protocol is used.
- B. Endpoint information is not exchanged across sites unless a policy is configured to allow communication across sites.
- C. Endpoint information is exchanged across sites as soon as the endpoint is discovered in one site.
- D. Endpoint information is exchanged across sites when the endpoints are discovered in both sites.

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739609.html#CiscoACIMultiSiteoverlaydataplane>

NEW QUESTION 49

Which statement regarding ACI Multi-Pod and TEP pool is true?

- A. The IP addresses used in the IPN network can overlap TEP pool of the APIC.
- B. A different TEP pool must be assigned to each Pod.
- C. The Pod1 TEP pool must be split and a portion of the TEP pool allocated to each Pod.
- D. The same TEP pool is used in all Pods.

Answer: B

Explanation:

Reference: <https://www.cisco.com/c/en/us/solutions/collateral/data-center-virtualization/application-centric-infrastructure/white-paper-c11-739714.html>

NEW QUESTION 51

What are two requirements for the IPN network when implementing a Multi-Pod ACI fabric? (Choose two.)

- A. EIGRP routing
- B. PIM ASM multicast routing
- C. BGP routing
- D. VLAN ID 4
- E. OSPF routing

Answer: AE

NEW QUESTION 54

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-620 Practice Exam Features:

- * 300-620 Questions and Answers Updated Frequently
- * 300-620 Practice Questions Verified by Expert Senior Certified Staff
- * 300-620 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-620 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-620 Practice Test Here](#)