



Cisco

Exam Questions 300-810

Implementing Cisco Collaboration Applications (CLICA)

NEW QUESTION 1

Drag and drop the SAML components from the left onto the descriptions on the right.

binding	Security information packets and statements sent to service providers by the IdP.
assertion	The mapping between SAML messages and protocols such as HTTP POST.
profile	Detailed descriptions of SAML component combinations for specific use cases.
protocol	Rules for how SAML sends requests for and gets responses of security information.

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

Graphical user interface Description automatically generated with medium confidence

NEW QUESTION 2

After integrating Cisco Unity Express with Cisco Unified Communications Manager Express, users report that the system does not respond to their digit presses. Which two configuration snippets resolve this issue? (Choose two.)

- A. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpmlcodec g729r8
 B. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notifycodec g711ulaw
 C. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay rtp-ntecodec g711ulaw
 D. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-kpmlcodec g711ulaw
 E. dial-peer voice 6800 voip destination-pattern 5... session protocol sipv2 session target ipv4:10.3.6.127 dtmf-relay sip-notifycodec g729r8

Answer: BC

NEW QUESTION 3

An engineer is asked to configure cisco jabber for windows on-premises, in phone-only mode and later with cisco IM and presence. In the configuration steps, which two DNS records will be needed, assuming the jabber client is in "domain.com?" (Choose two.)

☒ _cuplogin._tcp.domain.com

☐ cuplogin.tcp.cisco-internal.domain.com

☒ collab-edge._tcp.domain.com

☐ cisco-uds.tcp.cisco-internal.domain.com

☒ _cisco-uds._tcp.domain.com

- A. Option A
 B. Option B
 C. Option C
 D. Option D
 E. Option E

Answer: AE

NEW QUESTION 4

A collaboration engineer configured high availability for Cisco IM and Presence service The engineer wants to ensure that client failovers do not disrupt other users on the secondary node What must the engineer configure to accomplish this goal?

- A. "Maximum Requests Per Child" on the SIP Proxy service
 B. "Maximum database requests to allow" on the XCP Router service
 C. "EWS Status Frequency" on the Presence Engine service
 D. "CUPC 8.5 And Higher - Re-Login Limits" on the Server Recovery Manager service

Answer: D

NEW QUESTION 5

An engineer is configuring DNS for service discovery in a jabber deployment for On-premises Clients. Which snippet will complete the SRV record name _

tcp.example.com?

- A. _cisco_uds
- B. _collab_edge
- C. _xmp
- D. server
- E. _xmpp-client

Answer: A

NEW QUESTION 6

Which SAML component defines the content of data transferred from an IdP to a service provider?

- A. protocol
- B. assertion
- C. binding
- D. profiles

Answer: B

NEW QUESTION 7

Which two Cisco Unity Connection logs are used to troubleshoot issues with Message Waiting Indicators? (Choose two.)

- A. Connection IMAP Server
- B. Connection Mailbox Sync
- C. Connection Notifier
- D. Connection Message Transfer Agent
- E. Connection Conversation Manager


Answer: CE

Explanation:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/11x/troubleshooting/guide/b_11xcuctsg/b_1

NEW QUESTION 8

Refer to the exhibit.

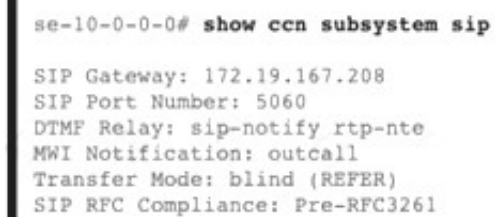

```
se-10-0-0-0# show ccn subsystem sip

SIP Gateway: 172.19.167.208
SIP Port Number: 5060
DTMF Relay: sip-notify rtp-nte
MWI Notification: outcall
Transfer Mode: blind (REFER)
SIP RFC Compliance: Pre-RFC3261
```

An administrator is configuring a Cisco Unity Express call handler. One of the options will transfer calls off-system to Cisco UCME. The administrator wants the transfer to finish while the transfer target is ringing. Which transfer-mode command completes the configuration?

- A. attended
- B. blind refer
- C. semi-attended
- D. Wind bye-also

Answer: C

NEW QUESTION 9

An engineer is checking the Cisco Unified Communications Manager and Cisco Unity Connection integration and presses the Message button on a phone to check the voicemail. Which action does Cisco Unified CM take?

- A. Cisco Unified CM looks up the voicemail pilot configured to dial.
- B. Cisco Unified CM routes the configured hunt pilot to Unity Connection.
- C. Cisco Unified CM looks up the hunt pilot configured to dial.
- D. Cisco Unified CM sends an AXL query to Unity Connection.

Answer: A

NEW QUESTION 10

A collaboration engineer is installing Jabber for Windows via the CLI Which two authentication command line arguments ensure that the client authenticates to a Cisco UCM server? (Choose two.)

- A. CCMCIP=10.10.10.99
- B. CUP_ADDRESS=10.10.10.98
- C. CTI=10.10.10.97
- D. REGISTRATION_SERVER=CUCM
- E. EXCLUDED_SERVICES=Webex

Answer: BD

NEW QUESTION 10

Which statement about SIP federation between Cisco Unified Communications IM and Presence and Microsoft Skype for Business is true?

- A. Add the federated user as a contact in Jabber to view its presence status.
- B. The role of SIP Proxy service is to process the XMPP packet in from Jabber and convert it to SIP.
- C. TLS is optional.
- D. Use of directory URI as an IM addressing scheme is not supported.

Answer: A

NEW QUESTION 13


SAML SSO is enabled in Cisco Unified Communications Manager. What happens when a browser-based client attempts to access a protected resource on a service provider?

- A. The browser follows the redirect and issues an HTTPS GET request to the IdP.
- B. The IdP checks for a valid browser session.
- C. The service provider generates a SAML authentication request.
- D. The SAML request is maintained as a query parameter in the GET request.

Answer: C

NEW QUESTION 15

Refer to the exhibit.

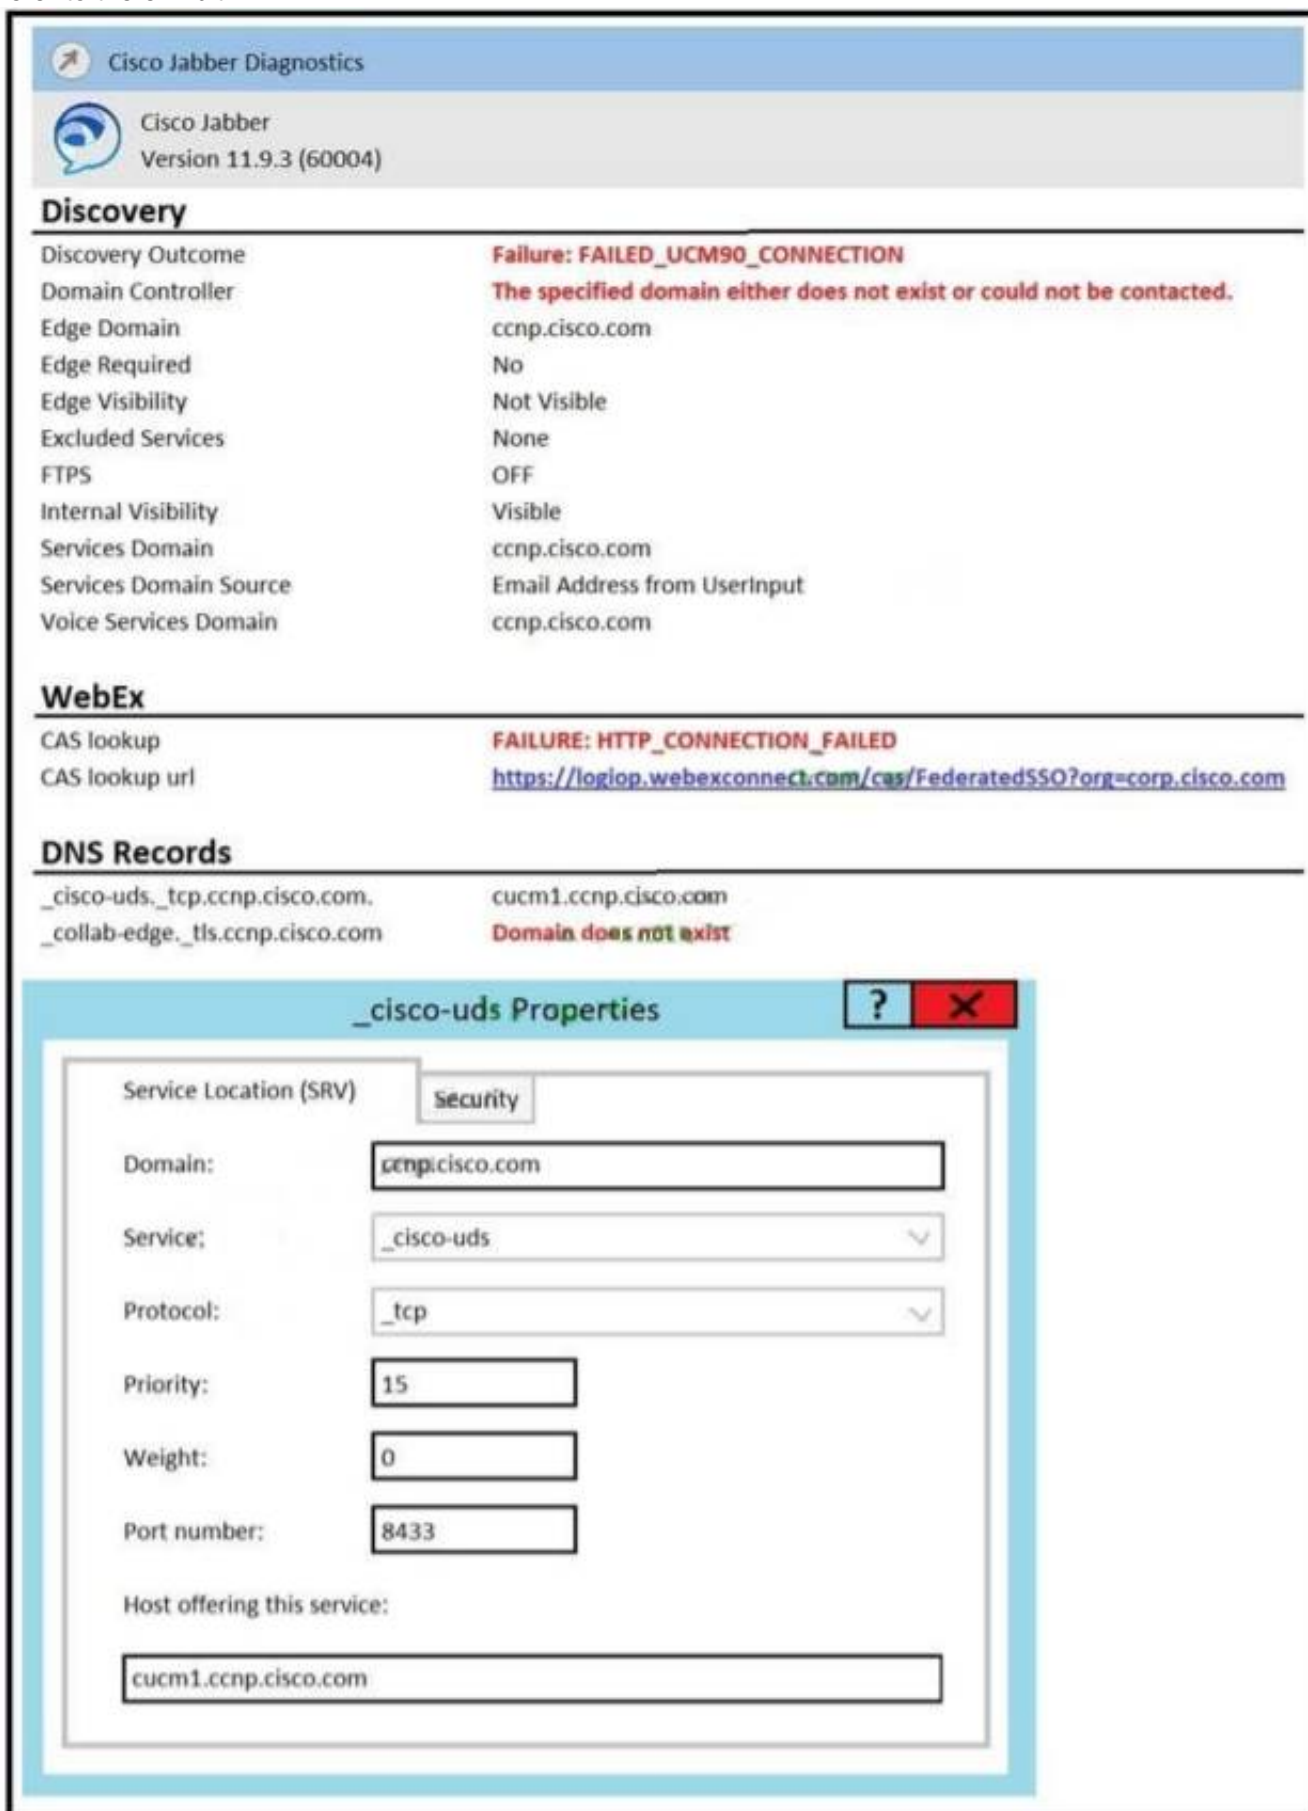

Cisco Jabber Diagnostics

Cisco Jabber
Version 11.9.3 (60004)

Discovery

Discovery Outcome	Failure: FAILED_UCM90_CONNECTION
Domain Controller	The specified domain either does not exist or could not be contacted.
Edge Domain	ccnp.cisco.com
Edge Required	No
Edge Visibility	Not Visible
Excluded Services	None
FTPS	OFF
Internal Visibility	Visible
Services Domain	ccnp.cisco.com
Services Domain Source	Email Address from UserInput
Voice Services Domain	ccnp.cisco.com

WebEx

CAS lookup	FAILURE: HTTP_CONNECTION_FAILED
CAS lookup url	https://logiop.webexconnect.com/cas/FederatedSSO?org=corp.cisco.com

DNS Records

_cisco-uds._tcp.ccnp.cisco.com.	cucm1.ccnp.cisco.com
_collab-edge._tls.ccnp.cisco.com	Domain does not exist

_cisco-uds Properties

Service Location (SRV)	Security
Domain:	ccnp.cisco.com
Service:	_cisco-uds
Protocol:	_tcp
Priority:	15
Weight:	0
Port number:	8433
Host offering this service:	cucm1.ccnp.cisco.com

Users connected to the internal network report a “Cannot communicate with the server” error while trying to log in to Cisco Jabber using auto service discovery. The Jabber diagnostics and the SRV record configuration are as shown in the exhibit. The host cucm1.ccnp.cisco.com is correctly resolved by the user desktops with the Cisco Unified Communications Manager IP address. Why is the user not able to log in?

- A. SRV protocol is not set up correctl

- B. It should be _tls instead of _tcp.
- C. Marking weight as 0 on the SRV record makes it inactive, so Jabber cannot discover the Cisco Unified CM.
- D. The port specified on the SRV record is wrong.
- E. The domain ccnp.cisco.com does not exist on the DNS server.

Answer: C

NEW QUESTION 20

An administrator is troubleshooting a Cisco Jabber Deskphone Control Issue. Which CTI event from the logs denotes that the request from Jabber to CTI Manager must the administrator check?

- A. CTI ProviderOpenRequest
- B. CTI ProviderRequest
- C. CTI OpenRequest
- D. CTI AvailableRequest

Answer: A

NEW QUESTION 24

An engineer needs to configure the cisco unity connection Auto-attendant feature to transfer calls to a specific destination, maintain control of the transfer, and take a defined administrative action upon failure. How is this accomplished?

- A. Consult Transfer
- B. Supervised Transfer
- C. Release to Switch
- D. HookFlash Transfer

Answer: A

NEW QUESTION 25

Which type of SRV record provides the location of Cisco Expressway-E?

- A. _collab-edge._tls.example.com
- B. _cisco-uds._tcp.example.com
- C. _cuplogin._tcp.example.com
- D. _http._tcp.example.com

Answer: A

NEW QUESTION 26


What submits credentials to the LDAP server during a call that uses SAML SSO?

- A. Cisco UCM server
- B. Service provider
- C. Browser-based Client
- D. IdP

Answer: D

NEW QUESTION 30

Refer to the exhibit.

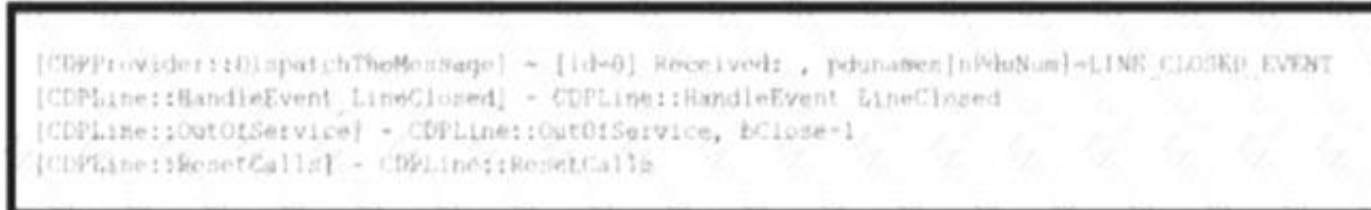

```
[CDPProvider::DispatchTheMessage] ~ [id=0] Received: , pduName[nPduNum]=LINE_CLOSED_EVENT
[CDPLine::HandleEvent LineClosed] ~ CDPLine::HandleEvent LineClosed
[CDPLine::OutOfService] ~ CDPLine::OutOfService, bClose=1
[CDPLine::ResetCalls] ~ CDPLine::ResetCalls
```

After receiving a new desk phone, the Jabber user can no longer make calls via phone control. The help desk collected the user's Jabber problem report and verified that they the correct Cisco UCM CTI permissions. Which configuration must be changed to correct this issue?

- A. Verify that the desk phone device has Allow Control of Device from CTI enabled.
- B. Verify that the Cisco UCM service profile has Cisco UCM CTI servers configured.
- C. Verify that the user's desk phone device is listed as a controlled device in the Cisco UCM end user configuration
- D. Verify that the device line configuration has Allow Control of Device from CTI enabled.

Answer: A

NEW QUESTION 32

An administrator is configuring auto-attendant with basic IVR applications on Cisco Unity Express and needs to ensure that a specific telephone number initiates the application. Which setting should be configured to accomplish this task?

- A. trigger
- B. call control group
- C. script
- D. prompt

Answer: A

NEW QUESTION 34

An administrator must Implement toll-fraud prevention on Cisco Unity Connection by using restricted tables. Which action accomplishes this task?

- A. Block all numbers that start with 999*.
- B. Allow calls to international operators and conference rooms only.
- C. Permit calls only to specific domestic long-distance area codes.
- D. Allow calls to the international operator only.

Answer: C

NEW QUESTION 35

Which two authentication methods does Integrated Windows Authentication use to validate Windows credentials? (Choose two.)

- A. NTLM
- B. Digest Authentication
- C. SAML
- D. Kerberos
- E. Smart Card

Answer: CD

NEW QUESTION 37

Users on Cisco.com experience issues while using Cisco Jabber, and the error 'Cannot communicate with the server' appears. An engineer checks the logs for the Jabber client and discovers the error "LERR_JABBER_AUTH <17>: Authentication error with server e.g. resource bind, TLS, create a session or SASL error. What should be checked to resolve this issue?

- A. if the LDAP server is reachable and if port 443 is open
- B. if cup-xmpp certificates are valid and if port 8443 is open
- C. if the cup-xmpp certificates are valid and if port 5222 is open
- D. if the LDAP server is reachable and if port 5222 is open

Answer: C

NEW QUESTION 42

In Digital Network Cisco Unity Connection clusters, each site transmits and receives messages for the recipients based on which protocol?

- A. IMAP
- B. SMTP
- C. SIP
- D. SCCP

Answer: B

NEW QUESTION 46

An administrator is configuring digital networking between Cisco Unity Connection clusters. What are two requirements for the configuration? (Choose two.)
end-user credentials

- A. IP address/FQDN of LDAP server
- B. IP address/FQDN of Cisco UCM servers
- C. system administrator credentials
- D. IP address/FQDN of the Cisco Unity Connection servers

Answer: CD

NEW QUESTION 49

When Cisco IM and Presence is configured to use automatic fallback, how long does the Server Recovery Manager service wait for a failed service/server to remain active before an automatic fallback is initiated?

- A. 10 minutes
- B. 20 minutes
- C. 30 minutes
- D. 1 hour

Answer: C

NEW QUESTION 53

An engineer is configuring Cisco Unified IM and Presence on-premises SIP Federation. The IM and Presence Service node cannot find the external domain using DNS SRV. Assuming the DNS SRV configuration is Correct. what should the engineer configure next to resolve this issue?

- A. A static route that points to the internal interface of the external domain.
- B. A static route that points to the external Interface of the external domain.
- C. A static route on the external domain points to the external interface.
- D. A dynamic route on the external domain that points to the internal Interface.

Answer: B

NEW QUESTION 57

An administrator needs to prevent toll fraud on Cisco unity connection. Which action should be taken to accomplish this task?

- A. modify the class of restriction
- B. set up class of restriction in the Cisco IOS Voice Gateway
- C. set up all restriction tables to prevent calls to the operator
- D. assign a CSS that does not have calling rights to the caller extension.

Answer: C

NEW QUESTION 59

Refer to the exhibit.

Direct Routing Rules in Descending Order of Precedence					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Phone System
<input type="checkbox"/>	NewYork_AA	Active	11112222		
<input type="checkbox"/>	Attempt Sign In	Active			
<input type="checkbox"/>	Chicago_AA	Active	22221111		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Phone System
<input type="checkbox"/>	NewYork_AA	Active	11112222		
<input type="checkbox"/>	Attempt Sign In	Active			
<input type="checkbox"/>	Chicago_AA	Active	22221111		
<input type="checkbox"/>	Opening Greeting	Active			
Forwarded Routing Rules in Descending Order of Precedence					
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Forwarding Station
<input type="checkbox"/>	Attempt Forward	Active			
<input type="checkbox"/>	Dallas_AA	Active	2222		
<input type="checkbox"/>	Arizona_AA	Active	11112222		
<input type="checkbox"/>	Opening Greeting	Active			
<input type="checkbox"/>	Display Name	Status	Dialed Number	Calling Number	Forwarding Station
<input type="checkbox"/>	Attempt Forward	Active			
<input type="checkbox"/>	Dallas_AA	Active	2222		
<input type="checkbox"/>	Arizona_AA	Active	11112222		
<input type="checkbox"/>	Opening Greeting	Active			

Calls that are not answered by the user are for the location. If the user at extension 11112222 does not have a voice mailbox, which rule is utilized when Cisco Unity Communication receives the forwarded call?

- A. NewYork_AA
- B. Attempt Sign In
- C. Arizona_AA
- D. Opening_Greeting

Answer: C

Explanation:

"When Unity Connection receives a call, it first determines if it is a direct or forwarded call based on the call information that is sent by the phone system, and then applies the applicable call routing table. If the call information matches all of the conditions for the first rule, the call is routed as specified in the rule. If any of the conditions specified in the first rule are not met, the call information is then compared to the conditions of the second rule, and so on, until a rule is found that matches all the characteristics of the call." https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/connection/10x/administration/guide/10xcucsagx/10xcu

NEW QUESTION 62

What is the maximum number of Cisco Unity Connection locations connected in a HTTPS network?

- A. 50
- B. 25
- C. 200
- D. 10

Answer: B

NEW QUESTION 66

Which dial-peer configuration routes calls from SIP-based phones on Cisco Unified Communications Manager Express to Cisco Unity Express?

- A. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g711alaw
- B. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec ilbc
- C. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g711ulaw
- D. dial-peer voice 7000 voip destination-pattern 7000 session protocol sipv2session target ipv4: 10.3.6.127 codec g729r6

Answer: C

NEW QUESTION 68

Refer to the exhibit.

```
2014-11-07 09:39:53.855 ERROR [0x00000298] [ice\TelephonyAdapterPhoneDevice.cpp(178)] [TelephonyAdapter]
[TelephonyAdapter selectDeviceImp] - switchMode to device [SEP84802D7698D6] failed with error
[eDeviceRegCouldNotOpenDevice]
```

An engineer is troubleshooting an issue with Cisco Jabber for Windows. The end-user reports that Cisco Jabber cannot be used to control a Cisco 8841 IP Phone. The phone appears in the Jabber client, but there is a red x on the icon for the phone. Which end-user option resolves the issue?

- A. Standard CTI Allow Reception of SRTP Key Material
- B. Standard CTI Allow Calling Number Modification
- C. Standard CTI Allow Call Monitoring
- D. Standard CTI Allow Control of Phones Supporting Rollover Mode

Answer: D

NEW QUESTION 72

An engineer must configure open SIP Federation on Cisco IM and Presence using Cisco Expressways with the additional requirement not to allow a specific list of domains and allow all other domains that are not specified. How is this additional requirement met?

- A. Configure default static routes for each blocked domain with an invalid next-hop IP address.
- B. Add a static route for each blocked domain and keep the "Block Route" checkbox checked.
- C. Block the specified SIP domains on the Expressway.
- D. Add each allowed domain as a SIP Federated domain.

Answer: C

NEW QUESTION 76

Refer to the exhibit.

```
Response:
HTTP/1.1 400 Bad Request
Strict-Transport-Security: max-age=31536000
X-Frame-Options: DENY
X-Content-Type-Options: nosniff
Set-Cookie: JSESSIONID=1233ADC137E591GE144792F38123AB09; Patch=/idb/; Secure; HttpOnly
TrackingID: FOS_d0ac0d7b-f4e4-4d83-ba27-d4252e310b88
Cache-Control: no-store
Date: Mon, 06 Jan 2018 10:30:00 GMT
Accept-Ranges: bytes
Server:
Vary: Accept-Charset, Accept-Encoding, Accept-Language, Accept
Access-Control-Allow-Credentials: true
Access-Control-Allow-Headers: Accept, Authorization, Content-Type, TrackingID
Access-Control-Allow-Methods: POST, PUT, PATCH, HEAD, GET, TRACE, CONNECT, OPTIONS, DELETE
Pragma: no-cache
Content-Type: application/json; charset=UTF-8
Connection: close
Content-Length: 176

{"error_description": "The refresh token provided is expired, revoked, malformed, or invalid.", "
error": "invalid_request", "trackingID": "FOS_a12b123c-d123-e123-a127-b420be310188"}
```

Apple Push Notification integration is configured in a Cisco Unified IM and Presence deployment and has been working properly. Administrators now report the error "Push notification settings cannot be configured. 400 Bad Request." in the GUI, and HTTP logs are displaying the errors that are shown in the exhibit. Which action solves this issue?

- A. Fix the network connectivity to Apple iCloud.
- B. Reboot the IM&P cluster.
- C. Change the HTTP proxy settings to remove errors in request syntax.
- D. Update Refresh Token Manually.

Answer: D

NEW QUESTION 77

Which two methods does Cisco Jabber use for contact searching in an on-premises deployment model? (Choose two.)

- A. HTTP
- B. XMPP
- C. UDS
- D. LDAP
- E. SIP

Answer: CD

NEW QUESTION 82

Which HTTP response code does Cisco UCM use to redirect a client to the identity provider for authentication?

- A. 300
- B. 301
- C. 302
- D. 304

Answer: C

NEW QUESTION 87

When trying to send a call out of Cisco Unity Connection, what happens when enabling the transfer to an alternate contact number, located under caller input?

- A. The restriction table is checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- B. The restriction table is not checked when an administrator changes the extension number via the Cisco Unity Connection admin page.
- C. The restriction table is not checked when a user changes the extension number via a TUI conversation.
- D. The restriction table is not checked when a user changes extension number via the Cisco Unity Connection Cisco PCA page.

Answer: B

NEW QUESTION 88

Which description of an IdP server is true?

- A. authenticates user credentials
- B. provides user authorization
- C. is an authentication request that is generated by a Cisco Unified Communications application
- D. consists of pieces of security information that are transferred to the service provider for user authentication

Answer: A

Explanation:

SSO uses Security Assertion Markup Language (SAML) to exchange authentication details between an Identity Provider (IdP) and a service provider. The identity provider authenticates user credentials and issues SAML assertions, which are pieces of security information transferred from the identity provider to the service provider for user authentication. Each assertion is an XML document that contains trusted statements about a subject including, for example, username and privileges. SAML assertions are usually digitally signed to ensure their authenticity.

NEW QUESTION 91

Which Cisco IM and Presence service must be activated and running for IM Presence to successfully integrate with Cisco Unified Communications Manager?

- A. Cisco DHCP Monitor Service
- B. Cisco AXL Web Service
- C. Self-Provisioning IVR
- D. Cisco XCP Authentication Service

Answer: B

Explanation:

https://www.cisco.com/c/en/us/td/docs/voice_ip_comm/cucm/im_presence/configAdminGuide/12_0_1/cup0_b_

NEW QUESTION 96

The calendaring integration on the Cisco IM and Presence server has not been functioning, which results in the “in a meeting” status not working in Cisco Jabber. Which service log should the engineer use to troubleshoot this issue?

- A. Cisco XCP Connection Manager
- B. Cisco Jabber Problem Report
- C. Cisco Presence Engine
- D. Cisco SIP Proxy

Answer: B

NEW QUESTION 99

Which Cisco Unified Communications Manager menu path is used to configure Cisco IM and Presence Server High Availability?

- A. System > LDAP > LDAP Directory
- B. System > Geolocation Configuration
- C. System > Presence Redundancy Groups
- D. System > Server

Answer: C

NEW QUESTION 102

Which step is the first for web-based single sign-on login?

- A. Authenticate.
- B. Redirect to IdP to get authenticated.
- C. Present authentication assertion.
- D. Request access to protected service.

Answer: D

NEW QUESTION 107

A collaboration engineer is troubleshooting an issue with Jabber client logins on the internal network. Users are receiving a certificate error message that Jabber cannot accept the certificate from the server. Users of phone-only mode Jabber clients do not have the same issue. Which two certificates must be regenerated in the initial steps of resolving this issue? (Choose two.)

- A. Cisco UCM tomcat certificate
- B. Cisco IM and Presence cup-xmpp certificate
- C. Cisco UCM CallManager certificate
- D. Cisco IM and Presence cup certificate
- E. Cisco IM and Presence tomcat certificate

Answer: AE

NEW QUESTION 110

Which statement describes a role of AXL communications in the BLF Plug-in Service of the Cisco Unified Attendant Console?

- A. The AXL communications allow registered attendants to log in to Cisco Unified Communications Manager and receive calls.
- B. The AXL communications enable Device Resolution Manager to resolve the device statuses of operator and system devices.
- C. The AXL communications are required after installation to verify that the specified CTI manager or managers and Cisco Unified Attendant Console versions match.
- D. The AXL communications are required after installation to verify that the specified CTI manager or managers and Cisco Unified CM versions.

Answer: B

Explanation:

"Part of the Cisco Unified Attendant Console Advanced BLF Plug-in service known as Device Resolution Manager (DRM) uses AXL to communicate with Cisco Unified Communications Manager. The AXL communications enable DRM to resolve the BLFs of operator and system devices, and to synchronize system devices within the Cisco Unified Communications Manager database."

https://www.cisco.com/c/dam/en/us/td/docs/voice_ip_comm/cucmac/cuaca/12_0_4/admin_guide/CUACA_AG_

NEW QUESTION 111

Drag and drop the steps from the left into the correct order on the right that describes the flow of presence updates when a user manually sets the presence status in Cisco Jabber. Not all options are used.

User manually sets presence status to "Off Shift"	step 1
Jabber sends an XMPP message on TCP port 5222 to the Cisco Presence Engine via the Cisco XCP Connection Manager and Cisco XCP Router.	step 2
Jabber sends an XMPP message on TCP port 5223 to the Presence Engine via the XCP federation Connection Manager and XCP Router.	step 3
The Presence Engine responds to Jabber via XCP Connection Manager and XCP Router with a confirmation of the status change.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1 – A

Step 2 – B Step 3 - D

<https://www.ciscolive.com/c/dam/r/ciscolive/emea/docs/2019/pdf/BRKUCC-3347.pdf>

NEW QUESTION 113

Refer to the exhibit.

```
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - About to verify the certificate.
[csf.cert.win32] [csf::cert::Win32CertVerifier:loadCertificateChain] - Certificate Chain status 0x20
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifySslPolicy] - Ignoring errors due to Invalid CN
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - SSL Policy status 0x2148204809
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyPolicies] - Basic Constraints Policy status 0x0
[csf.cert.win32] [csf::cert::Win32CertVerifier:verifyCertificate] - Certificate validation response is 'invalid'
[csf.cert.] [csf::cert::BaseCertVerifier:doVerifyCertificate] - Result of platform cert verification: [UNTRUSTED_ROOT]
[csf.cert.] [csf::cert::BaseCertVerifier:checkIdentity] - About to check for an Identity Match.
[csf.cert.xmpp] [csf::cert::XmppCertVerifier:checkIdentifier] - Verifying XMPP Identity 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verifyXmpp] - Xmp match was not found for: 'example.com'
[csf.cert.utils] [csf::cert::AltNameParserImpl:verify] - Match for 'example.com' found in dnsNames index: 1
[csf.cert.] [csf::cert::BaseCertVerifier::checkIdentifiers] - Verification of identity succeeded. Matched identifier : 'example.com'
[csf.diagnostics] [CSFDiagnostics::DiagnosticsImpl::AddRecord] - Add record task enqueued: example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature IGNORE_INVALID_CERT_CONDITION
[IGNORE_REVOCATION_INFO_UNAVAILABLE_ERRORS]
[csf.cert.] [csf::cert::BaseCertVerifier::applyIgnoreInvalidCertConditionPolicy] - About to enforce ignore invalid cert condition policy.
[csf.cert.] [csf::cert::IgnoreInvalidCertConditionPolicy::removeIgnoredStatuses] - No statuses have been removed from the verification status.
[csf.cert.] [csf::cert::IgnoreInvalidCertConditionPolicy::enforce] - Policy enforced
[csf.cert.] [csf::cert::BaseCertVerifier::verifyCertificateAsync] - Certificate initially verified, result: FAILURE
[csf.cert.] [csf::cert::CertificateDataImpl::parseSubjectCNField] - size of Subject CN field : 16
[csf.cert.] [csf::cert::CertificateDataImpl::parseSubjectCNField] - Subject CN field : impa.example.com
[csf.common.PolicySet] [csf::common:PolicySet::getPolicy] - Successfully found Policy with nature INVALID_CERT_MANAGEMENT [PROMPT_USER]
```

Users report that they are prompted to accept server certificates when they initially run Cisco Jabber. An engineer removes these prompts to prevent confusion. Which statement about this scenario is true?

- A. Presentation of the certificates can be disabled by setting up Cisco IM&P servers into nonsecure mode.
- B. Nothing can be done to resolve this issue because certificates must be accepted by each Jabber user, per Cisco policy.
- C. These certificates are self-signed certificates, so they must be added manually to the user OS certificate stores.
- D. The behavior is a security breach because certificates are considered untrusted and as not coming from Cisco Collaboration servers.

Answer: C

NEW QUESTION 117

A collaboration engineer is configuring service discovery for Cisco Jabber clients with an on-premises Cisco IM and Presence deployment Clients on the corporate network are working Clients on the public internet cannot locate the corporate services What must the engineer configure to enable service discovery for these clients?

- ☒ **_collab-edge._tls.example.com external DNS SRV record**
- ☐ **_collab-edge._tcp.example.com external DNS SRV record**
- ☐ **_cisco-uds._tls.example.com external DNS SRV record**
- ☐ **_cisco-uds._tcp.example.com external DNS SRV record**

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 119

Drag and drop the steps for SAML SSO authentication from the left into the order on the right.

The client attempts to access a resource.	step 1
The client sends an authentication request to an IdP.	step 2
The client sends a signed response to the service provider.	step 3
The IdP authenticates the client by using a signed response.	step 4
The service provider redirects the client to the IdP.	step 5

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

The client attempts to access a resource.	The client attempts to access a resource.
The client sends an authentication request to an IdP.	The service provider redirects the client to the IdP.
The client sends a signed response to the service provider.	The client sends an authentication request to an IdP.
The IdP authenticates the client by using a signed response.	The IdP authenticates the client by using a signed response.
The service provider redirects the client to the IdP.	The client sends a signed response to the service provider.

NEW QUESTION 123

An engineer needs to configure individual call handler greetings on Cisco Unity Connection so that a single greeting can override all other greetings set by users during a holiday period. Which type of greeting should be configured to accomplish this goal?

- A. internal
 B. Holiday
 C. Alternate
 D. Closed

Answer: C

NEW QUESTION 125

A user encounters a problem while checking voicemail, set up in a Cisco UCME and Cisco Unity Express integration. The user reports that when calling the office number from a mobile phone, the call goes to voicemail, but it is then routed to the main menu rather than the voicemail box. The user can check voicemail from an office phone without any issues How is this issue fixed?

- A. Assign the user to the correct user group.
 B. Add the user to Cisco Unity Express.
 C. Configure a primary E.164 number for the user.
 D. Set "Login without PIN" to 'No" for the user.

Answer: B

NEW QUESTION 130

A collaboration engineer restored a failed primary node of an active/standby IM and presence subcluster with the server Recovery manager set to defaults. The engineer notices that the user is still assigned to the secondary server. Which action resolves this issue?


- A. Select the Fallback button under Presence Redundancy Group Configuration
 B. Wait for 30 minutes for automatic fallback to occur

- C. Modify the DNS SRV records to point back to the primary server
- D. Restart the services on the primary server

Answer: A

NEW QUESTION 133

Refer to the exhibit

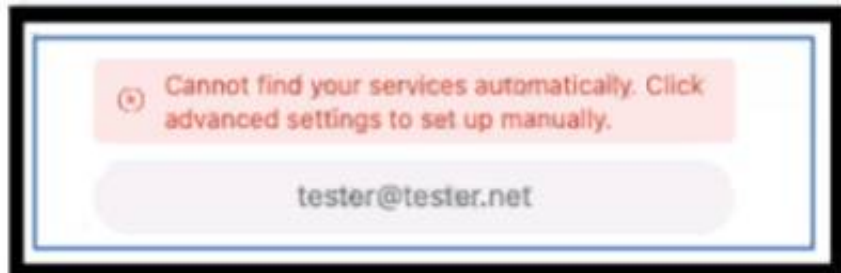

A collaboration engineer is configuring Jabber for Windows in softphone mode inside the corporate firewall. The engineer initially tests the client by manually setting the account type and the login server domain name. Everything works as expected. Next, the engineer resets Jabber and attempts to log in using automatic settings and receives an error.

Which two items must be modified to resolve the issue? (Choose two.)

- A. DNS A record for _cisco-uds
- B. DNS SRV record for _collab-edge
- C. username portion of the login email
- D. domain portion of the login email
- E. DNS SRV record for _cisco-uds

Answer: AE

NEW QUESTION 135

What is the primary mechanism in Cisco Unity Connection that is used for toll fraud prevention?

- A. restriction tables
- B. fraud tables
- C. transfer rules
- D. calling search spaces

Answer: A

NEW QUESTION 136

Refer to the exhibit



A collaboration engineer is troubleshooting a Cisco Jabber for Windows client issue. The end user is reporting that they cannot control the desk phone from the Cisco Jabber client. Which action must the engineer take to resolve this issue?

- A. Associate the User with the desk phone under the user configuration page on Cisco UCM
- B. Select "Primary Line" under the user configuration page on Cisco UCM
- C. Add the "Allow control of the device from the CTI" option under the client services profile configuration page
- D. Add the "Allow control of the device from the CTI" option under the desk phone configuration page

Answer: D

NEW QUESTION 141

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

300-810 Practice Exam Features:

- * 300-810 Questions and Answers Updated Frequently
- * 300-810 Practice Questions Verified by Expert Senior Certified Staff
- * 300-810 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 300-810 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-810 Practice Test Here](#)