

Exam Questions 350-601

Implementing and Operating Cisco Data Center Core Technologies

<https://www.2passeasy.com/dumps/350-601/>



NEW QUESTION 1

DRAG DROP

An engineer is implementing NetFlow on a Cisco Nexus 7000 Series Switch.

Drag and drop the NetFlow commands from the left into the correct order they must be entered on the right.

Select and Place:

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input	Step 1
N7K-1(config)# feature netflow	Step 2
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	Step 3
N7K-1(config)# flow monitor NetflowMonitor	Step 4

- A. Mastered
B. Not Mastered


Answer: A

Explanation:

N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input	N7K-1(config)# feature netflow
N7K-1(config)# feature netflow	N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor
N7K-1(config)# flow exporter NetflowMonitor N7K-1(config)# flow record NetflowMonitor	N7K-1(config)# flow monitor NetflowMonitor
N7K-1(config)# flow monitor NetflowMonitor	N7K-1(config)# interface <interface> N7K-1(config-if)# ip flow monitor NetflowMonitor input

NEW QUESTION 2

Refer to the exhibit.

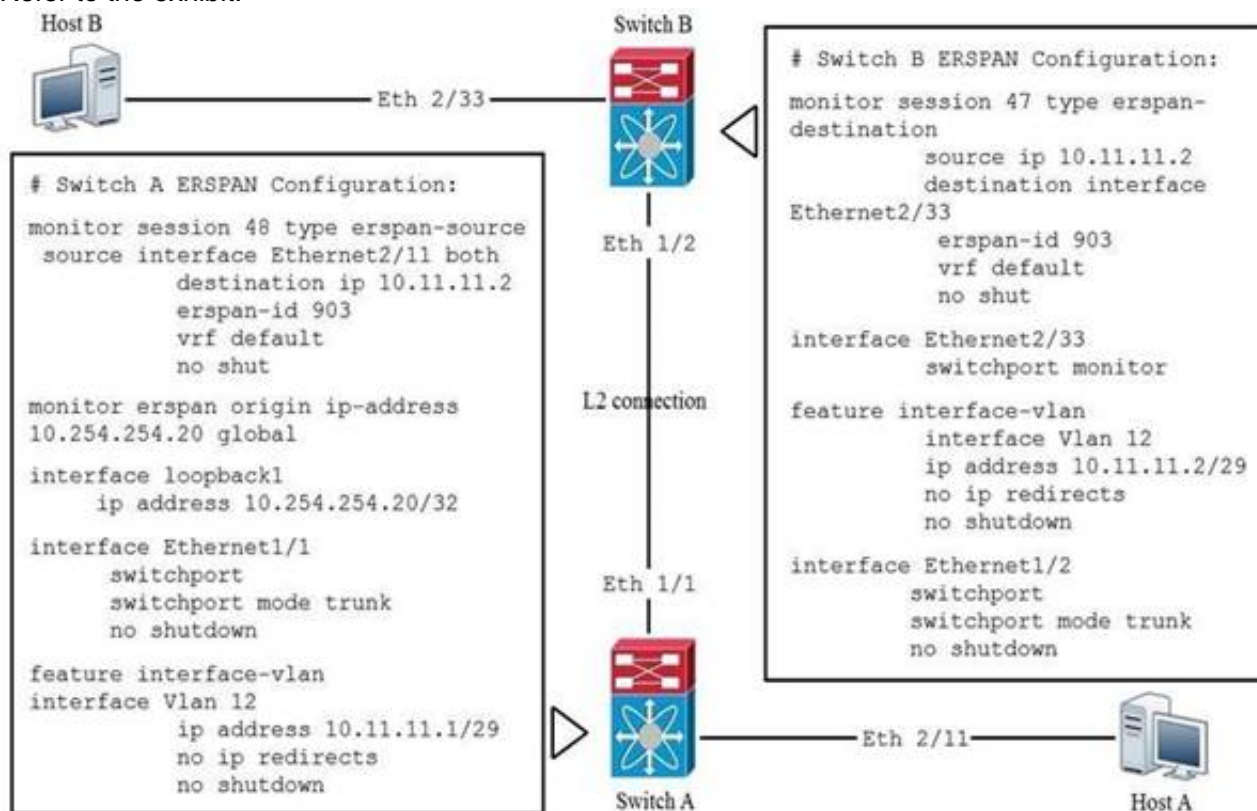

Which statement about the ERSPAN configuration in this environment is true?

- A. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.
B. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.
C. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.
D. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.

Answer: D

NEW QUESTION 3

Refer to the exhibit.

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

What must be connected to clear the HA NOT READY status?

- A. Layer 1-Layer 2 ports
- B. server chassis
- C. management ports
- D. network uplinks

Answer: B

NEW QUESTION 4

The engineer must configure SPAN on a Cisco Nexus 5000 Series Switch to get a capture of the traffic from these applications for an in-depth packet analysis. Which two SPAN characteristics must be considered? (Choose two.)

- A. SPAN source ports can be monitored in multiple SPAN sessions.
- B. The Ethernet, FC, vFC, port channel, SAN port channel can be used as SPAN source ports.
- C. A SPAN source port cannot be a destination SPAN port.
- D. Only Ethernet, FC, vFC, port channel port types can be used as SPAN source ports.
- E. The rx/tx option is available for VLAN or VSAN SPAN sessions.

Answer: BC

NEW QUESTION 5

Due to a major version change, an engineer must perform a software upgrade on a Cisco Nexus Series switch. Which two technologies can be implemented to reduce disruptions to the network during the upgrade? (Choose two.)

- A. vPC
- B. HSRP
- C. VDC
- D. MLAG
- E. PAgP

Answer: AC

NEW QUESTION 6

What are two capabilities of the Cisco Network Assurance Engine? (Choose two.)

- A. It validates that devices comply with network security policies.
- B. It predicts the impact of changes to the network.
- C. It predicts the network load on a data center.
- D. It ensures that network performance meets an SLA.
- E. It verifies the speed of network packet flows by using telemetry.

Answer: AB

NEW QUESTION 7

An engineer wants to create a backup of Cisco UCS Manager for disaster recovery purposes. What are two characteristics of a full state backup of a Cisco UCS Manager database? (Choose two.)

- A. contains all of the runtime states and statuses but not the configurations
- B. performs a complete binary dump of the database as a .bin file
- C. performs a complete binary dump of the database as a .sql file
- D. performs a complete binary dump of the database as a .txz file
- E. contains all of the configurations

Answer: BE

NEW QUESTION 8

An engineer is asked to use SaaS to manage Cisco computing. Which two items are needed to accomplish the task? (Choose two.)

- A. Intersight
- B. UCS Central
- C. Device/Claim ID
- D. Node name/Serial Number
- E. UCS Manager

Answer: AE

NEW QUESTION 9

A network engineer is adding a Cisco HyperFlex data platform to the Cisco Intersight management portal. Which two components are required for Intersight to claim the Cisco HyperFlex data platform? (Choose two.)

- A. device FQDN
- B. device claim code
- C. device public IP address
- D. device ID
- E. device serial number

Answer: BD

NEW QUESTION 10

Where is the witness deployed in a two-node Cisco HyperFlex Edge deployment?

- A. to the HyperFlex Edge two-node cluster
- B. to Cisco Intersight
- C. to a third-party cloud provider
- D. to an additional server with network access to HyperFlex Edge

Answer: B

NEW QUESTION 10

What is the benefit of adding Cisco HyperFlex Hardware Acceleration Cards to a HyperFlex deployment?

- A. increased compression efficiency
- B. increased network throughput
- C. GPU acceleration
- D. offline encryption acceleration

Answer: A

NEW QUESTION 15

DRAG DROP

An engineer deploys a custom guest shell rootfs onto multiple switches. Drag and drop the steps from the left into the correct order on the right. Export the Guest Shell rootfs.

Select and Place:

Customize the guest shell rootfs.	Step 1
Export the Guest Shell rootfs.	Step 2
Store it in a file server.	Step 3
Import the Guest Shell rootfs to other switches.	Step 4
Install the specific Guest Shell across devices simultaneously.	Step 5

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Customize the guest shell rootfs.	Customize the guest shell rootfs.
Export the Guest Shell rootfs.	Export the Guest Shell rootfs.
Store it in a file server.	Store it in a file server.
Import the Guest Shell rootfs to other switches.	Import the Guest Shell rootfs to other switches.
Install the specific Guest Shell across devices simultaneously.	Install the specific Guest Shell across devices simultaneously.

NEW QUESTION 17


Which two statements about the process at upgrading an EPLD on a Cisco MDS 9000 Series Switch are correct? (Choose two.)

- A. EPLDs can be upgraded only to the latest EPLD image.
- B. EPLD upgrades can be completed without powering down the module during the upgrade.
- C. An upgrade verification identifies the impact of each EPLD upgrade.
- D. The EPLDs for all the modules on a switch must be upgraded at the same time.
- E. EPLDs can be upgraded without replacing the hardware.

Answer: CE

NEW QUESTION 18

Refer to the exhibit.

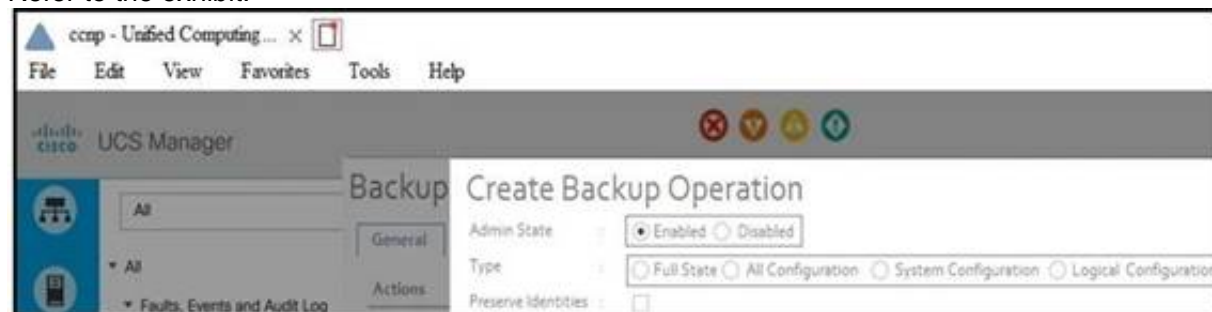

Which backup operation type does not include the Preserve Identities feature?

- A. full state
- B. all configuration
- C. logical configuration
- D. system configuration

Answer: C

NEW QUESTION 19

In an FCoE environment, for which two sets of data must an interface that implements the PAUSE mechanism always provision sufficient ingress buffer? (Choose two.)

- A. frames that were sent with high credit
- B. frames that were sent on the link but not yet received
- C. frames that were processed and transmitted by the transmitter after the PAUSE frame left the sender
- D. frames that were processed and transmitted by the transmitter before the PAUSE frame left the sender
- E. frames that were sent on the link and received

Answer: BD

NEW QUESTION 22

An engineer is implementing FCoE.

Which aspect of DCBXP on a Cisco Nexus switch affects this implementation?

- A. It requires that LLDP transmit and LLDP receive are enabled on the FCoE interface.
- B. It uses the Cisco Fabric Services protocol to exchange parameters between two peer links.
- C. It provides the authentication of peers on the Cisco Nexus switch.
- D. It always is enabled on 10/100-Mbps native Ethernet ports.

Answer: A

NEW QUESTION 25

Which statement about the MAC address that the FCoE Initialization Protocol chooses for use by an E-Node in an FCoE implementation is true?

- A. The FCoE Initialization Protocol uses a 24-bit FC-MAP and concatenates a 24-bit Fibre Channel ID to create a fabric-provided MAC address.
- B. The FCoE Initialization Protocol uses the burned-in MAC address of the converged network adapter for all FCoE operations.
- C. FCoE does not use a MAC address.
- D. The FCoE Initialization Protocol is used to acquire a Fibre Channel ID, and the address is used for all FCoE communications in the same way as Fibre Channel Protocol.
- E. The FCoE Initialization Protocol uses 01.00.0C as the first 24 bits of the MAC address and appends a 24-bit Fibre Channel ID to derive a full 48-bit FCoE MAC address.

Answer: AB

NEW QUESTION 29

An administrator needs to configure an automated policy to shut down a link when a given threshold is exceeded on MDS switch. Which feature needs to be used?

- A. RMON
- B. EEM
- C. Call Home
- D. Scheduler

Answer: B

NEW QUESTION 33

Refer to the exhibit.

```
Python Code:

import requests
import json

url='http://lab-93180bdlf-sw1/ins'
switchuser='dazfre'
switchpassword='Clscorox0'

myheaders={'content-type' : 'application/json'}
payload={
    "ins_api": {
        "version": "1.0",
        "type": "cli_show",
        "chunk": "0",
        "sid": "1",
        "input": "configure terminal : feature hsrp",
        "output_format": "json"
    }
}
response = requests.post(url,data=json.dumps(payload),
headers=myheaders,auth=(switchuser,switchpassword))

print(response.text)

ERROR MESSAGE
{
  "ins_api" : {
    "type": "cli_show",
    "version": "1.0",
    "sid": "eoc",
    "outputs": [
      "output" : [
        {
          "clierror" "% invalid command\n",
          "input" "configure terminal",
          "msg" "input CLI command error",
          "code" "400"
        }, {
          "clierror" "% invalid command\n",
          "input" "feature hsrp",
          "msg" "input CLI command error",
          "code" "400"
        }
      ]
    ]
  }
}
```

Why does the Python code for Cisco NX-API print an error message?

- A. The JSON is not a supported format for the NX-API.
- B. The "type" is wrong in the header of the request and should be "cli_conf"
- C. NX-API does not allow configuration for features via the requests module.
- D. The "type" is wrong in the body of the request and should be "cli_conf"

Answer: C

NEW QUESTION 38

Which two components should be checked when a Cisco Nexus 9000 Series Switch fails to boot using POAP? (Choose two.)

- A. POAP feature license
- B. DHCP server to bootstrap IP information
- C. image noted in the script file against switch bootflash
- D. script signed with security key
- E. TFTP server that contains the configuration script

Answer: BE

NEW QUESTION 39

An engineer is asked to manage a large-scale data center and collect information from multiple Cisco NX-OS devices using Cisco NX-OS Data Management Engine model.

Which technology should be used to accomplish this goal?

- A. NETCONF
- B. NX Yang
- C. NX-API REST
- D. JSON-RPC

Answer: C

NEW QUESTION 40

A network architect is asked to design and manage geographically distributed data centers across cities and decides to use a Multi-Site Orchestrator deployment. How many orchestrators should be deployed?

- A. 5
- B. 3
- C. 4
- D. 2

Answer: B

NEW QUESTION 44

Which configuration generates a syslog message when CPU utilization is higher than 60%?

- A. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type exact entry-op gt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- B. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type exact entry-op lt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- C. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type next entry-op gt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"
- D. event manager applet HIGH-CPU event snmp oid 1.3.6.1.4.1.9.9.109.1.1.1.1.6.1 get-type next entry-op lt 60 poll-interval 5 action 1.0 syslog priority notifications msg "cpu high"

Answer: A

NEW QUESTION 47

An engineer is enabling port security on a Cisco MDS 9000 Series Switch.


Which feature of enabling port security on a Cisco MDS 9000 Series Switch must be considered?

- A. It can be distributed by using Cisco Fabric Services.
- B. It authorizes only the configured sWWN to participate in the fabric.
- C. It always learns about switches that are logging in.
- D. It binds the fabric at the switch level.

Answer: A

NEW QUESTION 48

Refer to the exhibit.

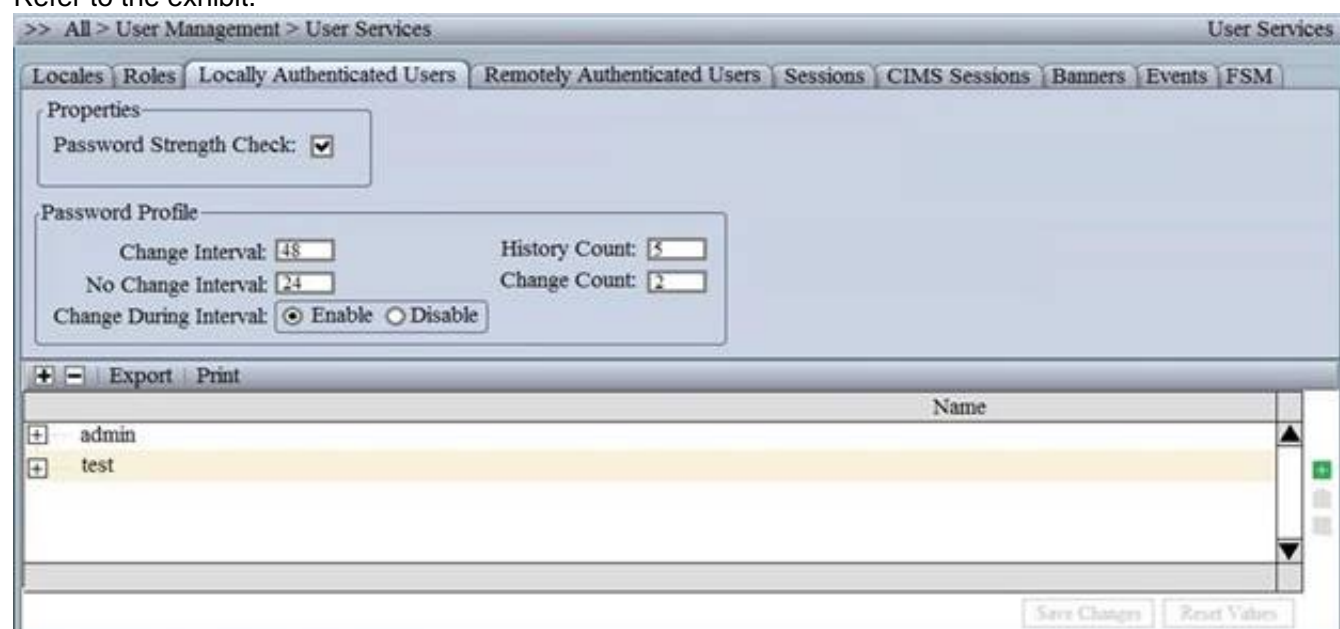

The screenshot shows the Cisco User Services configuration page for 'Locally Authenticated Users'. The 'Password Profile' section is expanded, showing the following settings:

- Change Interval: 48
- History Count: 5
- No Change Interval: 24
- Change Count: 2
- Change During Interval: ☒ Enable ☐ Disable

Below the settings, there is a table with the following data:

Name
admin
test

At the bottom of the page, there are buttons for 'Save Changes' and 'Reset Values'.

Which setting must be configured to prevent the reuse of passwords?

- A. Change Interval
- B. No Change Interval
- C. History Count
- D. Change Count

Answer: C

NEW QUESTION 49

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 350-601 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 350-601 Product From:

<https://www.2passeasy.com/dumps/350-601/>

Money Back Guarantee

350-601 Practice Exam Features:

- * 350-601 Questions and Answers Updated Frequently
- * 350-601 Practice Questions Verified by Expert Senior Certified Staff
- * 350-601 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 350-601 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year