

Exam Questions 3V0-21.23

VMware vSphere 8.x Advanced Design

<https://www.2passeasy.com/dumps/3V0-21.23/>



NEW QUESTION 1

Which requirement would be classified as a functional requirement within the design documentation?

- A. The system must perform virtual machine backups through an API.
- B. Virtual machines must be patched within one month of the patch release date.
- C. Virtual machines must be restarted within 30 minutes of a host failure.
- D. The system must be able to scale to support 500 concurrent virtual machines.

Answer: C

NEW QUESTION 2

An architect is designing a VMware solution for a customer based on the following information:

- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing IPv4 based network infrastructure.
- There is no budget for additional physical hardware.

Which two design decisions could the architect make to meet these requirements? (Choose two.)

- A. The ESXi hosts will leverage Fibre Channel (FC)
- B. The ESXi hosts will leverage NFS 3
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE)
- D. The ESXi hosts will leverage iSCSI
- E. The ESXi hosts will leverage NFS 4.1

Answer: BD

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-8A929FE4-1207-4C> Starting from vSphere 7.0, VMware no longer supports software FCoE in production environments.

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.storage.doc/GUID-6B49866F-7005-40>

NEW QUESTION 3

An architect is designing a new vSphere platform for a customer to meet the following requirements:

- The platform must be deployed into five physically separate sites.
- The sites are spread across multiple regions.
- Some sites require more than one vCenter Server.
- The platform must provide an administrator with the ability to access virtual infrastructure components across all sites from a single management tool instance.

Which single sign-on (SSO) design recommendation will meet these requirements?

- A. Use an SSO domain across all vCenter Server instances
- B. Use an SSO domain per region
- C. Use an SSO domain per vCenter Server instance
- D. Use an SSO domain per site

Answer: C

NEW QUESTION 4

An architect will be taking over control of a former Linux server fleet and repurposing the hardware into a new vSphere cluster. The current environment is already connected to the network but the hosts do not have any local disks. Since the fleet hardware is uniform, the architect can use a single ESXi image. All hosts within the cluster have the same CPU and memory capacity.

Which ESXi deployment method should the architect use?

- A. Stateless cached vSphere Auto Deploy
- B. Stateless vSphere Auto Deploy
- C. Manual install of each ESXi host with an image from USB
- D. Stateful vSphere Auto Deploy

Answer: B

NEW QUESTION 5

A customer is deploying a new cluster and wants to be able to patch and update two hosts in parallel. The cluster must be able to maintain N+1 resiliency across the remaining hosts while patching activities are performed. The current expected utilization of the platform requires a minimum of two hosts to support all of the virtual machines.

What is the minimum number of hosts the customer will require in the cluster in order to meet the required resiliency level?

- A. Five
- B. Six
- C. Four
- D. Seven

Answer: A

NEW QUESTION 6

An architect is designing a new vSphere platform to meet a list of requirements from the security team. Which two requirements would be classified as non-

functional requirements? (Choose two.)


- A. Migration of virtual machines between hosts must be encrypted
- B. Log information must be verbose to support incident resolution
- C. Critical events generated within the platform must be logged to an external Syslog service
- D. Data integrity must be ensured
- E. A common content library must be maintained across all data centers

Answer: CD

NEW QUESTION 7

Refer to the exhibit.

During a requirements gathering workshop, the architect shares the following diagram:

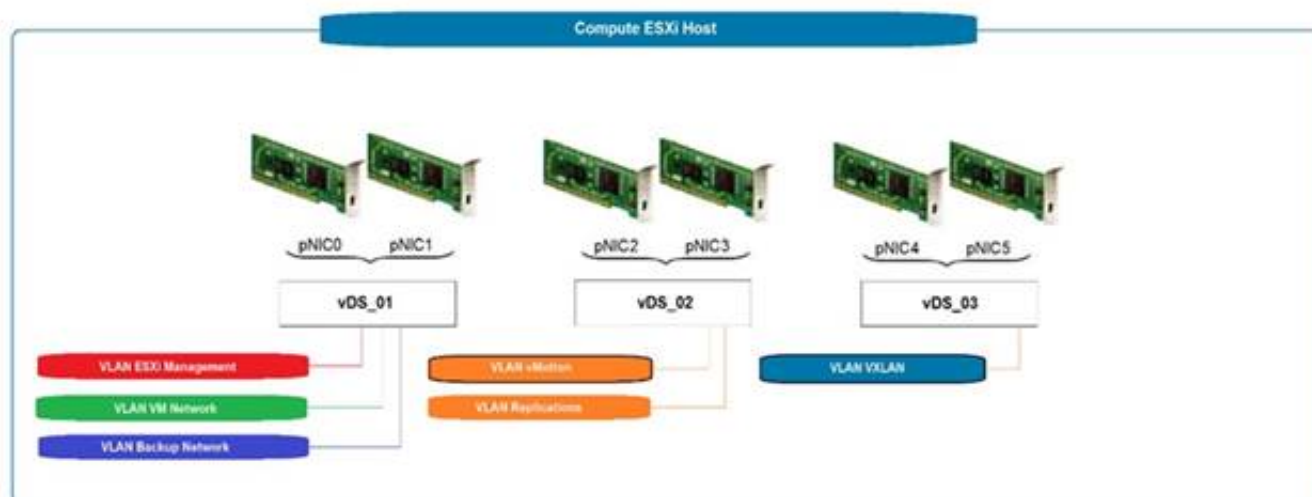

What should the architect recommend for guaranteed throughput for each service?

- A. Use explicit failover order with pNIC0 as Active for ESXi Management and VM Network Use explicit failover order with pNIC1 as Active for backup network Use explicit failover order with pNIC2 as Active for vMotion Use explicit failover order with pNIC3 as Active for replication
- B. Use the Route Based on IP Hash for ESXi management and VM network Use the Route Based on IP Hash for backup network Use the Route Based on the Originating Virtual Port for vMotion Use failover with pNIC3 as Active for replication
- C. Create a link aggregation group (LAG) for vDS_01 Use the Route Based on Physical NIC Load for vMotion Use the Route Based on Physical NIC Load for replication
- D. Use the Route Based on IP Hash for ESXi management and VM network Use failover with pNIC1 as Active for backup network Create a link aggregation group (LAG) for vDS_02

Answer: A

NEW QUESTION 8

Which design decision must be included in a design to allow for the deployment of a minimum supported configuration of vCenter High Availability (HA)?

- A. A new subnet will be provisioned for vCenter HA services
- B. A vSphere cluster will consist of more than three nodes
- C. The deployed vCenter Server will be Tiny
- D. The vCenter HA network will support a latency of less than 50 ms

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-8FD87389-8CC9-429>

NEW QUESTION 9

An architect is designing a new backup solution for a vSphere platform that has been recently upgraded to vSphere 7. The architect wants the backup solution to perform the following:

- > Full virtual machine image backup and restore
- > Incremental virtual machine image backup and restore
- > File level backup and restore within both Windows and Linux virtual machines
- > LAN-free backup

Which functional requirement should the architect include in the design of the new backup solution?

- A. The backup solution must leverage the VMware Consolidated Backup (VCB) framework.
- B. The backup solution must leverage virtual machine snapshots.
- C. The backup solution must leverage VMware vSphere Storage APIs - Data Protection.
- D. The backup solution must leverage VMware vStorage APIs for Data Protection (VADP).

Answer: C

NEW QUESTION 10

An architect is designing a new greenfield environment with 600 ESXi hosts in an automated fashion. The engineering department already has a PXE Boot server, TFTP server, and DHCP server set up with an NFS mount for their current Linux servers.

The architect must be able to demonstrate and meet a security requirement to have all infrastructure processes separated.

Which recommendation should the architect make for the ESXi host deployment?

- A. Request an isolated network segment to use and dedicate it to Auto Deploy functions

- B. Ask the business to expand the engineering environment to service the virtual environment as well
- C. Request a common shared network with flexible security measures to accommodate different auto deployment options
- D. Deploy each ESXi host individually and document it to satisfy security requirements

Answer: A


Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-8DAC6FEE-0441-4072>

NEW QUESTION 10

Refer to the exhibit.

During a requirements gathering workshop, a customer shares the following diagram regarding their availability service-level agreements (SLAs):

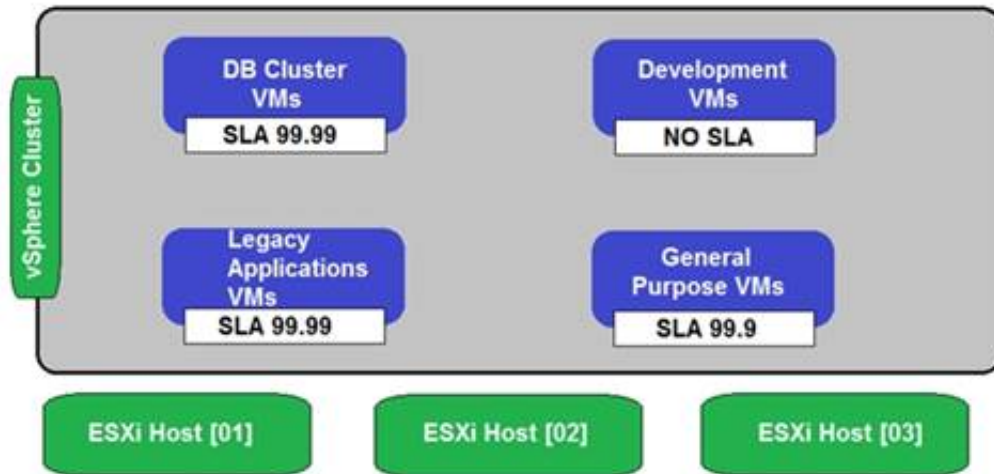

The customer states that there is no application level availability for legacy applications.

Which recommendation could the architect make to meet the customer's high availability requirements for the legacy applications virtual machines?

- A. Enable vSphere HA and add a VM Override with VM Restart Priority set to Disabled
- B. Enable Fault Tolerance
- C. Achieve application availability with snapshots
- D. Enable vSphere HA and add a VM Override with VM Restart Priority set to Lowest

Answer: D

NEW QUESTION 15

An architect is designing an environment for a retail customer. The design will use a single small vCenter Server Appliance and a cluster of eight ESXi hosts at a remote site. There is a single 10 GbE connected network at the remote site to support all management services. It is not possible to create additional management networks at the remote site. Virtual machine backups at the site will be dependent on the vCenter Server being available.

Which design decision should the architect make to maximize availability for backups?

- A. vCenter Server High Availability will be configured.
- B. The vCenter Server Appliance will be protected with vSphere Fault Tolerance.
- C. The cluster will be configured to use vSphere DRS in fully automated mode.
- D. The cluster will be configured with vSphere HA and set to restart virtual machines based on guest operating system heartbeat monitoring.

Answer: C

NEW QUESTION 17

In a meeting to discuss the minimum viable product (MVP) deployment of a new customer-facing application, the key stakeholder shares details of the application components and the application administrators share details of performance and integrity tests for the application.

The application will be made up of the following components:

> A web server

-Steps to confirm the web server is operating correctly will take 15 minutes after the application server is online.

> An application server

-Steps to confirm application server integrity will take 15 minutes after the database is online.

> A database server

-The database server will be managed by a database administrator, with an agreed service-level agreement (SLA) to restore and validate database services within one hour.

The existing VMware infrastructure offers a recovery point objective (RPO) of 5 minutes and recovery time objective (RTO) of 15 minutes through a combination of backups and replication.

In the event of an outage impacting all three application components, how long will it take for the application to recover and complete all checks?

- A. 15 minutes
- B. 60 minutes
- C. 105 minutes
- D. 90 minutes

Answer: C

Explanation:

15 restore VMs + 60 restore and test DB + 15 test app server + 15 test web server

NEW QUESTION 20

An architect is finalizing the design for a new vSphere platform based on the following information:

> All Windows virtual machines will be hosted on a dedicated cluster for licensing purposes.

- All Linux virtual machines will be hosted on a dedicated cluster for licensing purposes. All management virtual machines will be hosted on a dedicated cluster.
- A total of ten physical sites will be used to host virtual machines.
- In the event of one physical datacenter becoming unavailable, the manageability of the virtual infrastructure in the remaining data centers should not be impacted.
- Access to configure the management virtual machines via vCenter Server must be controlled through the management Active Directory domain.
- Access to configure the Windows and Linux virtual machines must be controlled through the resource Active Directory domain.
- The management and resource Active Directory domains are part of separate Active Directory forests and do not have any trusts between them.
- The design will use Active Directory with Integrated Windows Authentication.

How should the architect document the vCenter Server configuration for this design?

- A. Deploy a vCenter server for the management cluster. Deploy a vCenter Server for all remaining cluster
- B. Create a shared SSO domain for each physical site.
- C. Deploy a vCenter Server for the management cluster. Deploy a vCenter Server for all remaining cluster
- D. Create a shared SSO domain across all physical sites.
- E. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain for each physical site.
- F. Deploy a vCenter Server for the management cluster with a dedicated SSO domain. Deploy a vCenter Server for all remaining clusters and use a dedicated SSO domain into a single physical site.

Answer: B

NEW QUESTION 23

An architect is designing a VMware solution for a customer to meet the following requirements:

- The solution must use investments in existing storage array that supports both block and file storage.
- The solution must support the ability to migrate workloads between hosts within a cluster.
- The solution must support resource management priorities.
- The solution must support the ability to connect virtual machines directly to LUNs.
- The solution should use existing 32G fabric infrastructure.
- There is no budget for additional physical hardware.

Which design decision should the architect make to meet these requirements?

- A. The ESXi hosts will leverage Fibre Channel (FC).
- B. The ESXi hosts will leverage iSCSI.
- C. The ESXi hosts will leverage Fibre Channel over Ethernet (FCoE).
- D. The ESXi hosts will leverage NFS.

Answer: A

NEW QUESTION 26

An architect is preparing a design for a company planning digital transformation. During the requirements gathering workshop, the following requirements (REQ) and constraints (CON) are identified:

- REQ01 The platform must host different types of workloads including applications that must be compliant with internal security standard.
- REQ02 The infrastructure must initially run 100 virtual machines.
- REQ03 Ten of the virtual machines must be compliant with internal security standard.
- CON01 The customer has already purchased the licenses as part of another project.
- CON02 The customer has five physical servers that must be reused.

Additionally, based on resource requirements, four physical servers will be enough to run all workloads. Which recommendation should the architect make to meet requirements while minimizing project costs?

- A. Use Network I/O Control to ensure the internal security zone has higher share value
- B. Purchase additional servers and plan separate, isolated clusters for workloads that must be compliant with internal security
- C. Use a single cluster and ensure that different security zones are separated at least with dedicated VLANs and firewall
- D. Use a single cluster and configure DRS anti-affinity rules to ensure internal security compliant virtual machines cannot migrate between ESXi hosts.

Answer: C

NEW QUESTION 28

A architect is designing a new VMware software-designed data center (SDDC) using vSphere 7 to meet the following requirements:

- The SDDC must be deployed at two locations: primary and secondary.
- vSphere Replication must be used to replicate virtual machines between the two locations.
- Site Recovery Manager must be used to orchestrate disaster recovery (DR) activities.
- One single-sign on (SSO) domain must be used to authenticate access at both locations. Which design decision should the architect make to meet these requirements?

- A. A vCenter Server Appliance will be deployed to each sit
- B. Unique SSO domains will be created per site.
- C. A vCenter Server will be installed on Windows virtual machines deployed to both sites.
- D. A vCenter Server Appliance will be deployed to each site.
- E. A vCenter Server Appliance will be deployed to the primary site only.

Answer: D

NEW QUESTION 33

An architect is designing a solution based on the following information:

- Each ESXi host has a single physical NIC with two 10 Gbps ports.
- There is a performance-based service-level agreement (SLA) that guarantees 15 Gbps bandwidth for production virtual machines at all times.
- There is no budget to purchase additional hardware.

➤ The hardware replacement SLA is based on a delivery agreement of two business days.

Which recommendation for the configuration of vSphere High Availability (HA) should the architect include in the design?

- A. Configure vSphere HAConfigure % based admission control Configure two isolation addresses Consider an OEM with NIC failure conditions in their Proactive HA plugin
- B. Configure vSphere HASet das.IgnoreRedundantNetWarning to trueConsider an OEM with NIC failure conditions in their Proactive HA plugin
- C. Configure vSphere HAConfigure two existing data stores for heartbeatConsider an OEM with NIC failure conditions in their Proactive HA plugin
- D. Configure Proactive HA Automation Level: Automated Remediation: Maintenance mode for all failuresConsider an OEM with NIC failure conditions in their Proactive HA plugin

Answer: A

NEW QUESTION 35

An architect is designing a new VMware solution for a customer that has a number of different resource profiles.

The following are the business requirements for the design:

The solution must support virtual machines with the following storage profiles:

-Write-intensive

-Backup

-Write-Once-Read-Many (WORM) archive

➤ The solution must support migration of virtual machine disks between storage profiles.

➤ The WORM archive data must be located at an isolated secure site.

➤ The backup storage array must only be connected to a backup media server.

➤ All data should be recoverable from backup.

Which design decision should the architect make to meet the business requirements?

- A. The solution will leverage a single storage array for the WORM archive and write-intensive storage profiles
- B. The solution will leverage the same array for the backup and write-intensive storage profiles
- C. The solution will leverage a different array for each storage profile
- D. The solution will leverage a single storage array for all storage profiles

Answer: C

NEW QUESTION 38

A customer defines a requirement to minimize the vMotion migration time during a maintenance period. The servers being used are equipped with eight 1 GbE network adapters.

Per the defined logical network configuration, there are two network adapters each used for:

➤ Management traffic

➤ vMotion traffic

➤ iSCSI traffic

➤ Virtual machine traffic

Which design decision should the architect make to meet the customer requirement?

- A. Use Network I/O Control to define a reservation for vMotion traffic.
- B. Implement Multi-NIC vMotion by adding additional vMotion VMkernels.
- C. Configure a dedicated TCP/IP stack for vMotion traffic.
- D. Combine vMotion and Management traffic to make use of four adapters.

Answer: A

NEW QUESTION 43

During a requirements gathering workshop, the customer provides the following requirement (REQ) and constraints (CON):

➤ REQ01: The customer is looking for a way to limit database virtual machine (VM) placement to save on CPU licensing costs.

➤ CON01: There is a single cluster with no budget to scale.

➤ CON02: All virtual machines must run on the consolidated cluster.

Which two design decisions should the architect make to meet the customer requirement? (Choose two.)

- A. The solution must use VM-VM anti-affinity rules
- B. The solution must use vSphere DRS in manual mode
- C. The solution must use a vRealize Orchestrator workflow for VM placement
- D. The solution must use VM-Host affinity rules
- E. The solution must use vSphere VM and host DRS groups

Answer: DE

NEW QUESTION 46

An architect is tasked with expanding an existing VMware software-defined data center (SDDC) solution so that it can be used to deliver a virtual desktop infrastructure (VDI) service off-shore development activities.

The production environment is currently delivered across two geographically dispersed data centers. The two data centers are currently connected to each other through multiple diversely routed, high bandwidth and low latency links. The current operations management components are deployed to a dedicated management cluster that is configured with N+1 redundancy. The current VMware software-defined data center (SDDC) has a monthly availability target of 99.5%, which includes all management components.

The customer requires that the new solution scale to support the concurrent running of 500 persistent virtual desktops. The virtual desktops must not share the same virtual infrastructure as existing virtual machines, but can be managed using the same VMware operations management components. Any new VDI service management components must be installed into the management cluster. There is no requirement to back up the virtual desktops because all relevant user data is stored centrally. The VDI service is providing business critical services and must have an availability target of 99.9%.


Given the information from the customer, which two assumptions would the architect include in the design? (Choose two.)

- A. The existing virtual infrastructure has sufficient capacity to host the new VDI workloads
- B. The existing operations monitoring tools have sufficient capacity to monitor the new VDI services
- C. The existing management cluster has enough available capacity to host any VDI service management component
- D. The management cluster has N+1 redundancy
- E. The VDI service has a higher service-level agreement (SLA) than the operations management SLA

Answer: BD

NEW QUESTION 49

Refer to the exhibit.

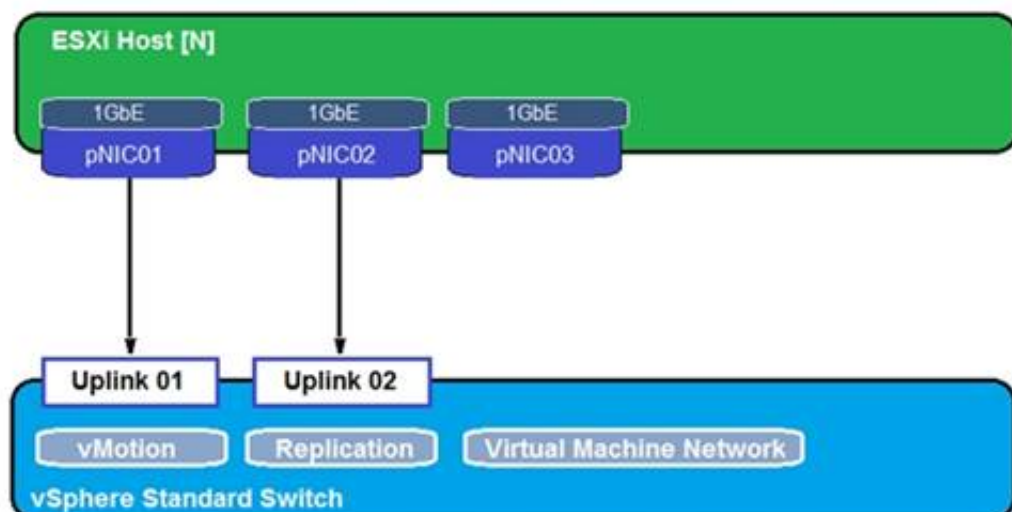

During a requirements gathering workshop, the customer shares the following about their existing ESXi host virtual networking infrastructure:

The customer confirms that:

- > Each ESXi host has approximately 200 virtual machines.
- > They want to maximize the number of concurrent virtual machine migrations.
- > When placing a host in maintenance mode, it takes a long time to evacuate the virtual machines. Which two recommendations should the architect make in order to help the customer overcome their challenge? (Choose two.)

- A. Configure the network to use MTU for the VMotion VMKernel to 1,600 bytes
- B. Configure the network to use MTU for the VMotion VMKernel to 9,000 bytes
- C. Create an additional standard switch with pNIC3 to use for vMotion
- D. Use the 3 pNICs and bundle them in a link aggregation group (LAG) configuration
- E. Use 10 GbE NICs instead of 1 GbE

Answer: CE

NEW QUESTION 51

An architect is tasked with designing a new VMware software-defined data center (SDDC) using VMware vSAN. The architect uses a storage assessment tool to determine the storage requirements for the new vSAN cluster. The new SDDC is going to be deployed into the existing data center and must be connected to a shared core network switch.

The architect decides to use vSAN ReadyNodes with the following configuration:

- > Two disk groups with:
- > Write Intensive NVMe 800 GB drive for cache
- > Four 3.84 TB Mixed Use NVMe for capacity
- > Four 10 GbE ports

Which element represents a risk that should be included in this design?

- A. The number of 10 GbE capable ports in the vSAN ReadyNode
- B. The use of vSAN ReadyNodes
- C. The existing network is 10 GbE capable
- D. The use of NVMe drives for cache and capacity

Answer: C

NEW QUESTION 52

Which two statements are true about gathering functional business and application requirements? (Choose two.)

- A. It focuses on functional requirements with C-level stakeholders
- B. It leverages a single set of QUESTION NO:s for all stakeholders
- C. It might require multiple rounds of stakeholder interviews
- D. It builds stakeholder consensus
- E. It is a non-iterative process

Answer: AC

NEW QUESTION 56

A VMware Service Provider is tasked with delivering a solution for continuous availability for a subset of Tier 1 virtual machines (VMs) and vApps running in their vSAN environment. The VMs make up a mission-critical application and there can be no data loss in the event of an outage at their primary data center. In the event of a regional outage, they have established a 10-minute recovery point objective (RPO). Failover/failback to the third site must be automated.

They have the following in place:

- > Two local data centers (primary and secondary) connected with 100 Gb dedicated fiber

- > 2ms round-trip time (RTT) latency between the sites A third data center located on another power grid
- > 70ms latency between the primary and secondary data centers
- > Matching storage arrays at all locations

Which two solutions could be used to meet the requirements? (Choose two.)

- A. Site Recovery Manager
- B. Snapshots
- C. vSAN Metro Cluster
- D. vSphere Data Protection
- E. vStorage APIs for Array Integration (VAAI)

Answer: BC

NEW QUESTION 61

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 3V0-21.23 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 3V0-21.23 Product From:

<https://www.2passeasy.com/dumps/3V0-21.23/>

Money Back Guarantee

3V0-21.23 Practice Exam Features:

- * 3V0-21.23 Questions and Answers Updated Frequently
- * 3V0-21.23 Practice Questions Verified by Expert Senior Certified Staff
- * 3V0-21.23 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 3V0-21.23 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year