


350-401 Dumps

Implementing and Operating Cisco Enterprise Network Core Technologies

<https://www.certleader.com/350-401-dumps.html>

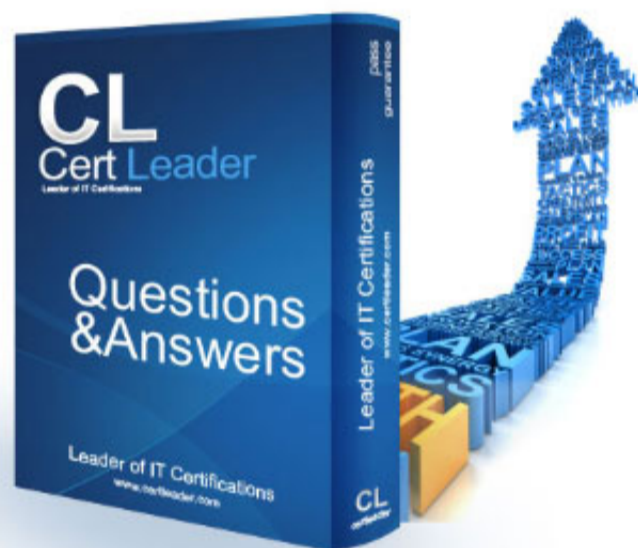

NEW QUESTION 1

A network administrator is implementing a routing configuration change and enables routing debugs to track routing behavior during the change. The logging output on the terminal is interrupting the command typing process. Which two actions can the network administrator take to minimize the possibility of typing commands incorrectly? (Choose two.)

- A. Configure the logging synchronous global configuration command
- B. Configure the logging delimiter feature
- C. Configure the logging synchronous command under the vty
- D. Press the TAB key to reprint the command in a new line
- E. increase the number of lines on the screen using the terminal length command

Answer: CD

NEW QUESTION 2

Refer to the exhibit.

```
R1# sh run | begin line con
line con 0
  exec-timeout 0 0
  privilege level 15
  logging synchronous
  stopbits 1
line aux 0
  exec-timeout 0 0
  privilege level 15
  logging synchronous
  stopbits 1
line vty 0 4
  password 7 045802150C2E
  login
line vty 5 15
  password 7 045802150C2E
  login
!
end

R1# sh run | include aaa | enable
no aaa new-model
R1#
```

Which privilege level is assigned to VTY users?

- A. 1
- B. 7
- C. 13
- D. 15

Answer: D

NEW QUESTION 3

A client device fails to see the enterprise SSID, but other devices are connected to it. What is the cause of this issue?

- A. The hidden SSID was not manually configured on the client.
- B. The broadcast SSID was not manually configured on the client.
- C. The client has incorrect credentials stored for the configured hidden SSID.
- D. The client has incorrect credentials stored for the configured broadcast SSID.

Answer: A

NEW QUESTION 4

Which protocol does REST API rely on to secure the communication channel?

- A. TCP
- B. HTTPS
- C. SSH
- D. HTTP

Answer: B

NEW QUESTION 5

On which protocol or technology is the fabric data plane based in Cisco SD-Access fabric?

- A. LISP
- B. IS-IS
- C. Cisco TrustSec
- D. VXLAN

Answer: D

NEW QUESTION 6


Which PAgP mode combination prevents an Etherchannel from forming?

- A. auto/auto
- B. desirable/desirable
- C. auto/desirable
- D. desirable

Answer: A

NEW QUESTION 7

Refer to the exhibit.

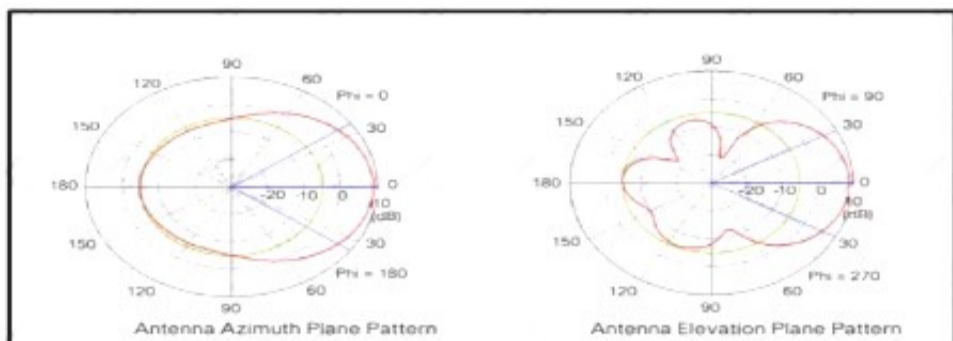


Which type of antenna do the radiation patterns present?

- A. Patch
- B. Omnidirectional
- C. Yagi
- D. Dipole

Answer: A

NEW QUESTION 8

Refer to exhibit.

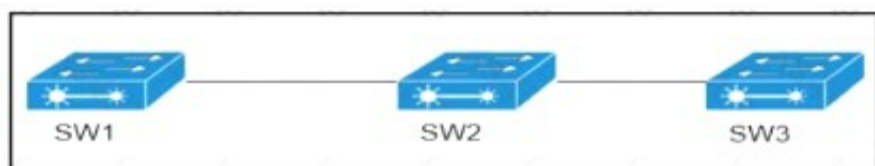

VLANs 50 and 60 exist on the trunk links between all switches. All access ports on SW3 are configured for VLAN 50 and SW1 is the VTP server. Which command ensures that SW3 receives frames only from VLAN 50?

- A. SW1 (config)#vtp pruning
- B. SW3(config)#vtp mode transparent
- C. SW2(config)=vtp pruning
- D. SW1 (config >»vtp mode transparent

Answer: A

NEW QUESTION 9

What is a benefit of data modeling languages like YANG?

- A. They enable programmers to change or write their own application within the device operating system.
- B. They create more secure and efficient SNMP OIDs.
- C. They make the CLI simpler and more efficient.
- D. They provide a standardized data structure, which results in configuration scalability and consistency.

Answer: D

NEW QUESTION 10

Which statement describes the IP and MAC allocation requirements for virtual machines on types 1 hypervisors?

- A. Each virtual machine requires a unique IP and MAC addresses to be able to reach to other nodes.
- B. Each virtual machine requires a unique IP address but shares the MAC address with the physical server.
- C. Each virtual machines requires a unique IP address but shares the MAC address with the address of the physical server.
- D. Each virtual machine requires a unique MAC address but shares the IP address with the physical server.

Answer: A

NEW QUESTION 10

Which TCP setting is tuned to minimize the risk of fragmentation on a GRE/IP tunnel?

- A. MTU
- B. Window size
- C. MRU
- D. MSS

Answer: D

NEW QUESTION 14

Which two GRE features are configured to prevent fragmentation? (Choose two.)

- A. TCP window size
- B. TCP MSS
- C. IP MTU
- D. DF bit clear
- E. MTU ignore

Answer: BC

NEW QUESTION 18


Which statements are used for error handling in Python?

- A. try/catch
- B. try/except
- C. block/rescue
- D. catch/release

Answer: B

NEW QUESTION 22

Refer to the exhibit.

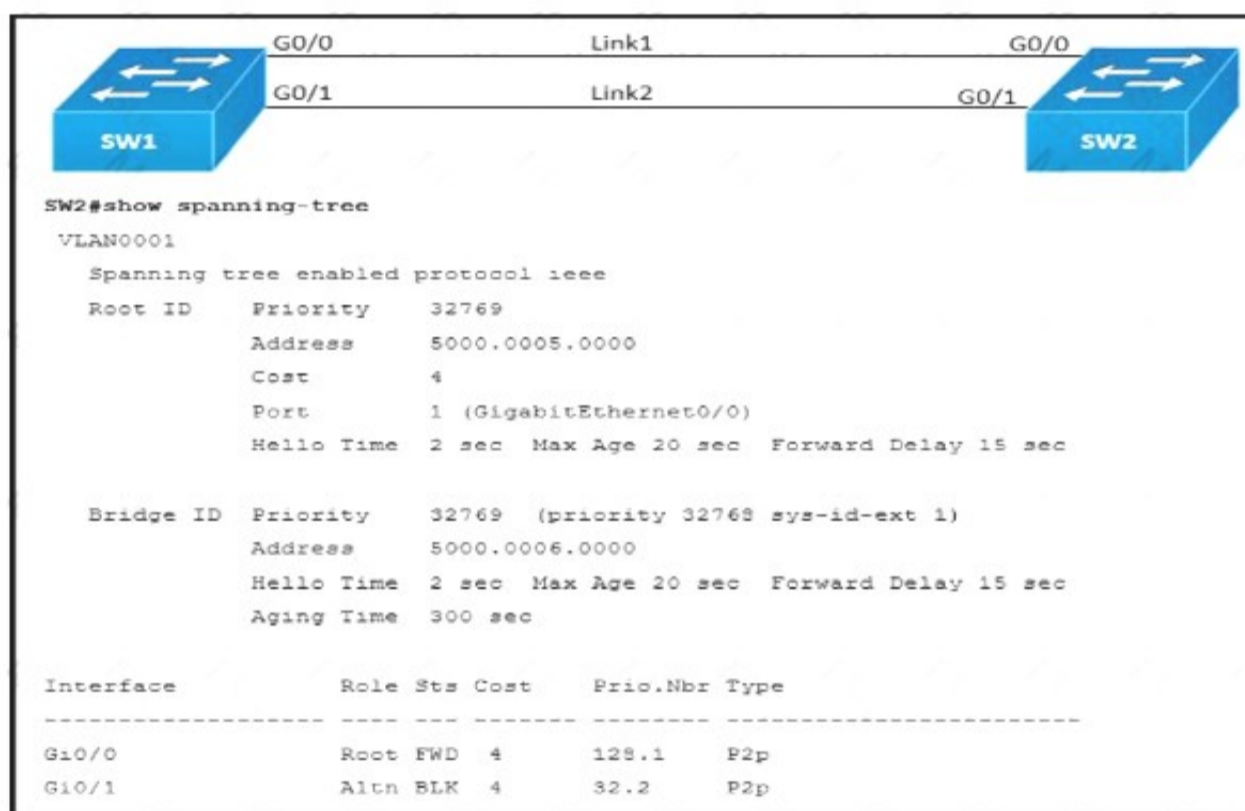

Link1 is a copper connection and Link2 is a fiber connection. The fiber port must be the primary port for all forwarding. The output of the show spanning-tree command on SW2 shows that the fiber port is blocked by spanning tree. An engineer enters the spanning-tree port-priority 32 command on GO/1 on SW2, but the port remains blocked. Which command should be entered on the ports that are connected to Link2 to resolve the issue?

- A. Enter spanning-tree port-priority 32 on SW1.
- B. Enter spanning-tree port-priority 224 on SW1.
- C. Enter spanning-tree port-priority 4 on SW2.
- D. Enter spanning-tree port-priority 64 on SW2.

Answer: A

NEW QUESTION 27


At which Layer does Cisco DNA Center support REST controls?

- A. EEM applets or scripts
- B. Session layer
- C. YMAL output from responses to API calls
- D. Northbound APIs

Answer: D

NEW QUESTION 28

Refer to the exhibit.

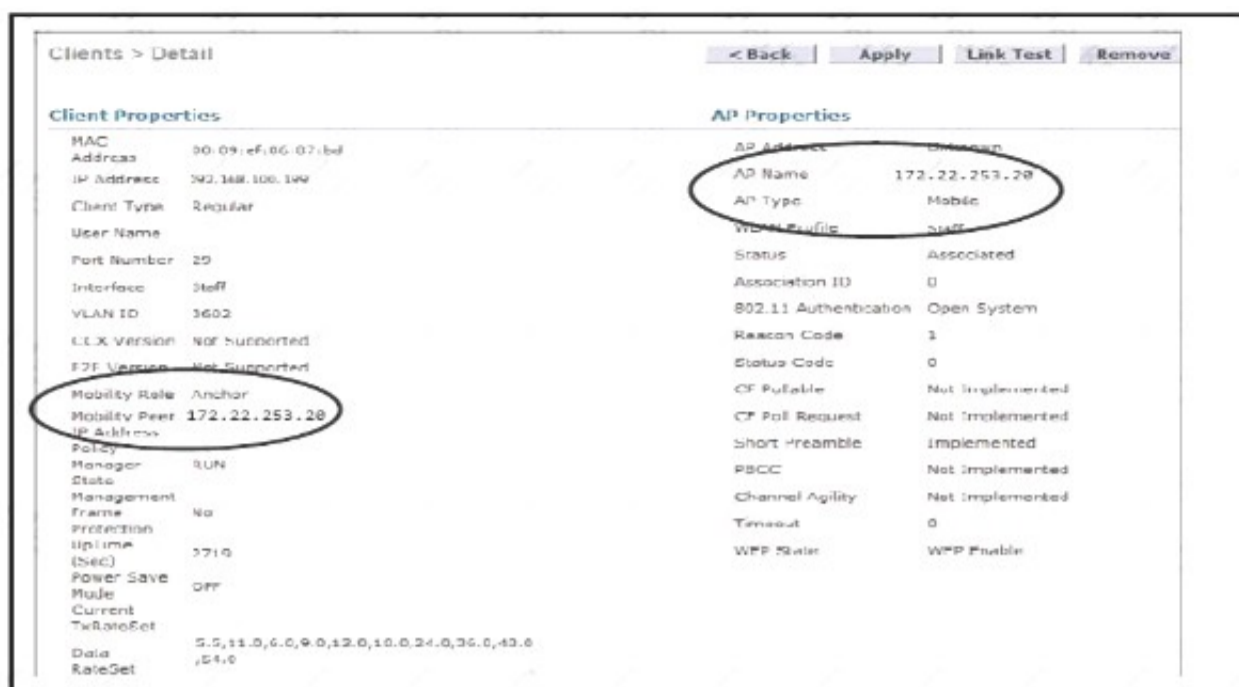

The WLC administrator sees that the controller to which a roaming client associates has Mobility Role Anchor configured under Clients > Detail. Which type of roaming is supported?

- A. Indirect
- B. Layer 3 intercontroller
- C. Layer 2 intercontroller
- D. Intracontroller

Answer: B

NEW QUESTION 29

Which technology provides a secure communication channel for all traffic at Layer 2 of the OSI model?

- A. MACsec
- B. IPsec
- C. SSL
- D. Cisco Trustsec

Answer: A

NEW QUESTION 30

Which feature must be configured to allow packet capture over Layer 3 infrastructure?

- A. VSPAN
- B. IPSPAN
- C. RSPAN
- D. ERSPAN

Answer: D

NEW QUESTION 31


Which two methods are used by an AP that is trying to discover a wireless LAN controller? (Choose two.)

- A. Cisco Discovery Protocol neighbour
- B. broadcasting on the local subnet
- C. DNS lookup cisco-DNA-PRIMARY.localdomain
- D. DHCP Option 43
- E. querying other APs

Answer: CD

NEW QUESTION 34

Refer to the exhibit.

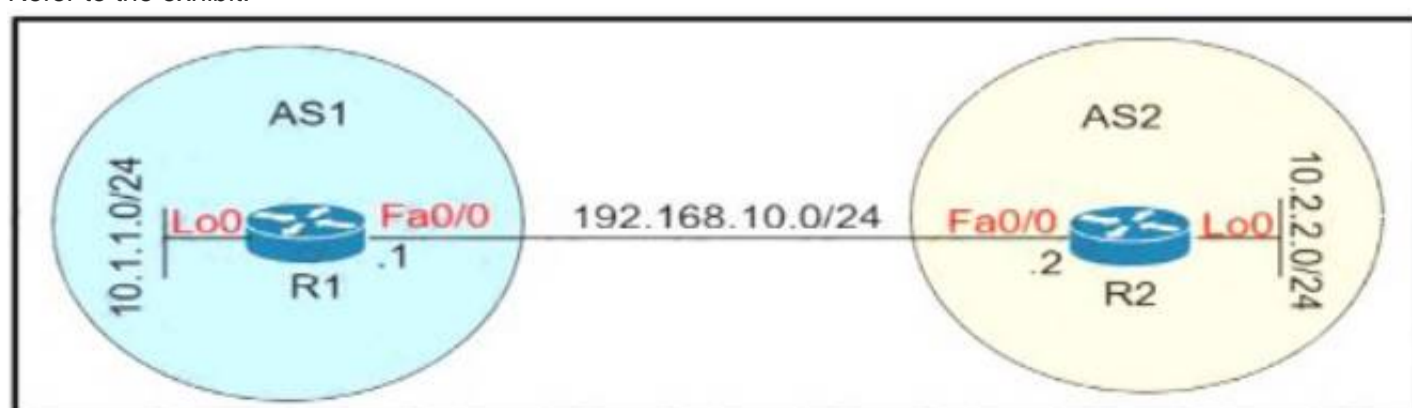

Which configuration establishes EBGP neighborship between these two directly connected neighbors and exchanges the loopback network of the two routers through BGP?

- A)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

B)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

C)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.0.0.0 mask 255.0.0.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.0.0.0 mask 255.0.0.0
```

D)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#neighbor 10.2.2.2 update-source lo0
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#neighbor 10.1.1.1 update-source lo0
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A

NEW QUESTION 37

Which JSON syntax is valid?

- [{"switch": "name": "dist1", "interfaces": ["gig1", "gig2", "gig3"]}]
- { "switch": ("name": "dist1", "interfaces": ["gig1", "gig2", "gig3"])}]
- [{"switch": {"name": "dist1", "interfaces": ["gig1", "gig2", "gig3"]}}]
- [{"switch/": {"name/": "dist1", "interfaces/": ["gig1", "gig2", "gig3"]}}]

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 38

Refer to the exhibit.

```
Extended IP access list EGRESS
10 permit ip 10.1.100.0 0.0.0.255 10.1.2.0 0.0.0.255
20 deny ip any any
```

An engineer must modify the access control list EGRESS to allow all IP traffic from subnet 10.1.10.0/24 to 10.1.2.0/24. The access control list is applied in the outbound direction on router interface GigabitEthernet 0/1. Which configuration commands can the engineer use to allow this traffic without disrupting existing traffic flows?

A)

```
config t
 ip access-list extended EGRESS
 permit ip 10.1.10.0 255.255.255.0 10.1.2.0 255.255.255.0
```

B)

```
config t
 ip access-list extended EGRESS
 5 permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
```

C)

```
config t
 ip access-list extended EGRESS2
 permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
 permit ip 10.1.100.0 0.0.0.255 10.1.2.0 0.0.0.255
 deny ip any any
 !
 interface g0/1
 no ip access-group EGRESS out
 ip access-group EGRESS2 out
```

D)

```
config t
 ip access-list extended EGRESS
 permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 40


Which method displays text directly into the active console with a synchronous EEM applet policy?

- A. event manager applet boom event syslog pattern 'UP'action 1.0 gets 'logging directly to console'
- B. event manager applet boom event syslog pattern 'UP'action 1.0 syslog priority direct msg 'log directly to console'
- C. event manager applet boom event syslog pattern 'UP'action 1.0 puts 'logging directly to console'
- D. event manager applet boom event syslog pattern 'UP'action 1.0 string 'logging directly to console'

Answer: B

NEW QUESTION 43

Refer to the exhibit.

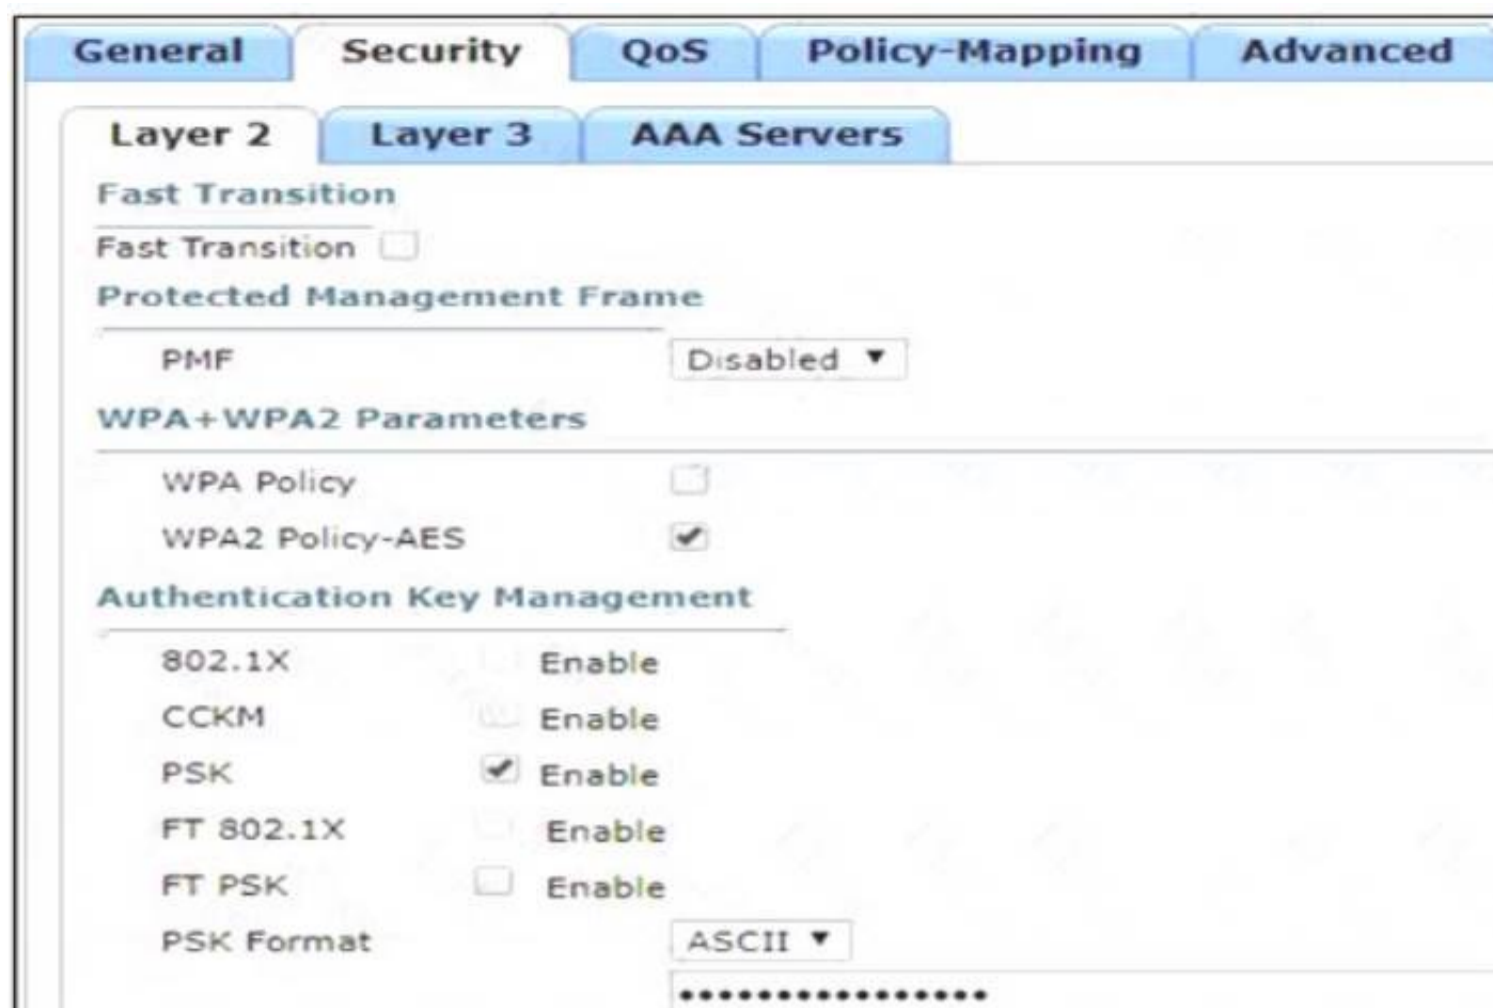

Based on the configuration in this WLAN security setting, Which method can a client use to authenticate to the network?

- A. text string
- B. username and password
- C. certificate
- D. RADIUS token

Answer: A

NEW QUESTION 47

Refer to the exhibit.

```
access-list 1 permit 10.1.1.0 0.0.0.31
ip nat pool CISCO 209.165.201.1 209.165.201.30 netmask 255.255.255.224
ip nat inside source list 1 pool CISCO
```

What are two effect of this configuration? (Choose two.)

- A. Inside source addresses are translated to the 209.165.201.0/27 subnet.
- B. It establishes a one-to-one NAT translation.
- C. The 10.1.1.0/27 subnet is assigned as the inside global address range.
- D. The 209.165.201.0/27 subnet is assigned as the outside local address range.
- E. The 10.1.1.0/27 subnet is assigned as the inside local addresses.

Answer: AE

NEW QUESTION 48

Which statement about Cisco EAP-FAST is true?

- A. It does not require a RADIUS server certificate.
- B. It requires a client certificate.
- C. It is an IETF standard.
- D. It operates in transparent mode.

Answer: A

NEW QUESTION 49

What are two benefits of virtualizing the server with the use of VMs in data center environment? (Choose two.)

- A. Increased security
- B. reduced rack space, power, and cooling requirements
- C. reduced IP and MAC address requirements
- D. speedy deployment
- E. smaller Layer 2 domain

Answer: BD

NEW QUESTION 52

When reason could cause an OSPF neighborship to be in the EXSTART/EXCHANGE state?

- A. Mismatched OSPF network type
- B. Mismatched areas
- C. Mismatched MTU size
- D. Mismatched OSPF link costs

Answer: C

NEW QUESTION 53

An engineer configures a WLAN with fast transition enabled. Some legacy clients fail to connect to this WLAN. Which feature allows the legacy clients to connect while still allowing other clients to use fast transition based on their OLTs?

- A. over the DS
- B. adaptive R
- C. 802.11V
- D. 802.11k

Answer: B

NEW QUESTION 56

Refer to the exhibit.

```
R1#show ip bgp
BGP table version is 32, local router ID is 192.168.101.5
Status codes: S suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

   Network        Next Hop         Metric LocPrf  Weight Path
  * 192.168.102.0  192.168.101.18    80
  * 192.168.102.0  192.168.101.14    80      80
  * 192.168.102.0  192.168.101.10    0      0 64515 64515 i
  *> 192.168.102.0  192.168.101.2     0      0 32768 64513 i
  * 192.168.102.0  192.168.101.6     80      80 0 64514 64514 i
```

Which IP address becomes the active next hop for 192.168.102.0/24 when 192.168.101.2 fails?

- A. 192.168.101.18
- B. 192.168.101.6
- C. 192.168.101.10
- D. 192.168.101.14

Answer: A

NEW QUESTION 58

Which feature does Cisco TrustSec use to provide scalable, secure communication throughout a network?

- A. security group tag ACL assigned to each port on a switch
- B. security group tag number assigned to each port on a network
- C. security group tag number assigned to each user on a switch
- D. security group tag ACL assigned to each router on a network

Answer: B

NEW QUESTION 59

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 350-401 Exam with Our Prep Materials Via below:

<https://www.certleader.com/350-401-dumps.html>