

Fortinet

Exam Questions NSE5_FAZ-7.2

Fortinet NSE 5 - FortiAnalyzer 7.2



NEW QUESTION 1

What is the best approach to handle a hard disk failure on a FortiAnalyzer that supports hardware RAID?

- A. Hot swap the disk.
- B. There is no need to do anything because the disk will self-recover.
- C. Run execute format disk to format and restart the FortiAnalyzer device.
- D. Shut down FortiAnalyzer and replace the disk

Answer: D

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD46446#:~:text=On%20FortiAnalyzer%2FFortiMana> If a hard disk on a FortiAnalyzer unit fails, it must be replaced. On FortiAnalyzer devices that support hardware RAID, the hard disk can be replaced while the unit is still running – known as hot swapping. On FortiAnalyzer units with software RAID, the device must be shutdown prior to exchanging the hard disk.

NEW QUESTION 2

Consider the CLI command:

```
# configure system global
  set log-checksum md5
end
```

What is the purpose of the command?

- A. To add a unique tag to each log to prove that it came from this FortiAnalyzer
- B. To add the MD5 hash value and authentication code
- C. To add a log file checksum
- D. To encrypt log communications

Answer: C

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/cli-reference/849211/global>

NEW QUESTION 3

When working with FortiAnalyzer reports, what is the purpose of a dataset?

- A. To provide the layout used for reports
- B. To define the chart type to be used
- C. To retrieve data from the database
- D. To set the data included in templates

Answer: C

NEW QUESTION 4

Which two methods can you use to send event notifications when an event occurs that matches a configured event handler? (Choose two.)

- A. SMS
- B. Email
- C. SNMP
- D. IM

Answer: BC

NEW QUESTION 5

Why should you use an NTP server on FortiAnalyzer and all registered devices that log into FortiAnalyzer?

- A. To properly correlate logs
- B. To use real-time forwarding
- C. To resolve host names
- D. To improve DNS response times

Answer: A

Explanation:

- Synchronize the time on FortiAnalyzer and all registered devices with an NTP server for proper log correlation

NEW QUESTION 6

Which two constraints can impact the amount of reserved disk space required by FortiAnalyzer? (Choose two.)

- A. License type
- B. Disk size

- C. Total quota
- D. RAID level


Answer: BD

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/368682/disk-space-allocation>

NEW QUESTION 7

Refer to the exhibit.

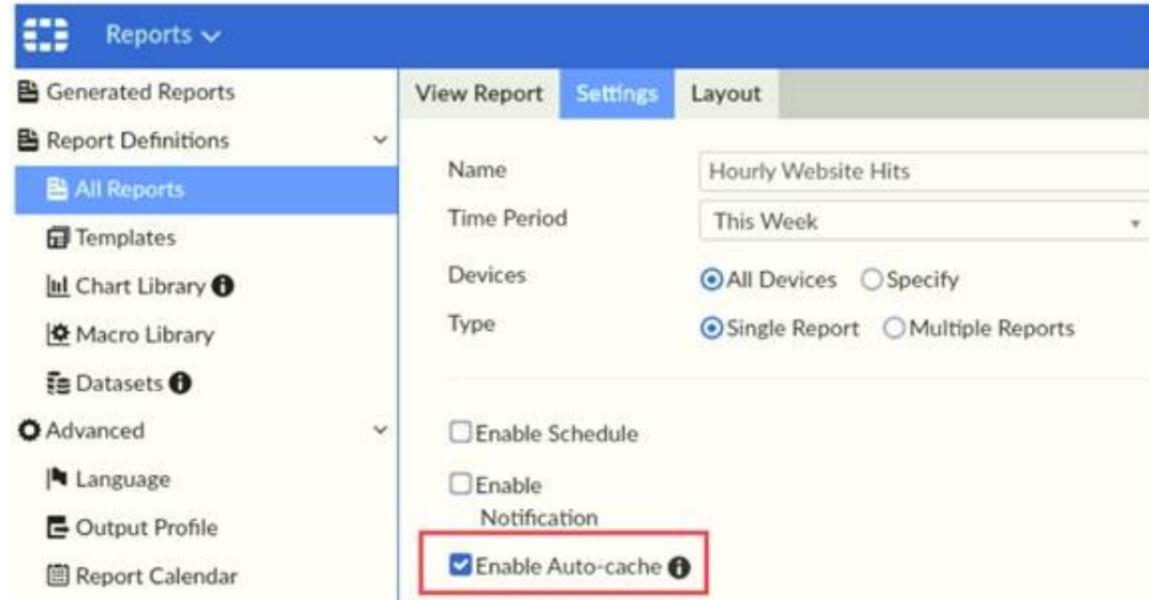

Which two statements are true regarding enabling auto-cache on FortiAnalyzer? (Choose two.)

- A. Report size will be optimized to conserve disk space on FortiAnalyzer.
- B. Reports will be cached in the memory.
- C. This feature is automatically enabled for scheduled reports.
- D. Enabling auto-cache reduces report generation time for reports that require a long time to assemble datasets.

Answer: CD

NEW QUESTION 8

Which two statements are true regarding FortiAnalyzer operating modes? (Choose two.)

- A. When in collector mode, FortiAnalyzer collects logs from multiple devices and forwards these logs in the original binary format.
- B. Collector mode is the default operating mode.
- C. When in collector mod
- D. FortiAnalyzer supports event management and reporting features.
- E. By deploying different FortiAnalyzer devices with collector and analyzer mode in a network, you can improve the overall performance of log receiving, analysis, and reporting

Answer: AD

NEW QUESTION 9

Which SQL query is in the correct order to query the database in the FortiAnslyzer?

- A. SELECT devid FROM Slog GROUP BY devid WHERE * user' =* USERI'
- B. SELECT devid WHERE 'u3er'='USERI' FROM \$ log GROUP BY devid
- C. SELECT devid FROM Slog- WHERE *user' =' USERI' GROUP BY devid
- D. FROM Slog WHERE 'user* =' USERI' SELECT devid GROUP BY devid

Answer: C

NEW QUESTION 10

Refer to the exhibit.

D. Log fetching

Answer: D

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.0/administration-guide/651442/fetcher-management>

NEW QUESTION 17

You've moved a registered logging device out of one ADOM and into a new ADOM. What happens when you rebuild the new ADOM database?

- A. FortiAnalyzer resets the disk quota of the new ADOM to default.
- B. FortiAnalyzer migrates archive logs to the new ADOM.
- C. FortiAnalyzer migrates analytics logs to the new ADOM.
- D. FortiAnalyzer removes logs from the old ADOM.

Answer: C

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD40383>

NEW QUESTION 22

You created a playbook on FortiAnalyzer that uses a FortiOS connector

When configuring the FortiGate side, which type of trigger must be used so that the actions in an automation stitch are available in the FortiOS connector?

- A. FortiAnalyzer Event Handler
- B. Incoming webhook
- C. FortiOS Event Log
- D. Fabric Connector event

Answer: D

NEW QUESTION 25

Which two statements are true regarding ADOM modes? (Choose two.)

- A. You can only change ADOM modes through CLI.
- B. In normal mode, the disk quota of the ADOM is fixed and cannot be modified, but in advance mode, the disk quota of the ADOM is flexible because new devices are added to the ADOM.
- C. In an advanced mode ADO
- D. you can assign FortiGate VDOMs from a single FortiGate device to multiple FortiAnalyzer ADOMs.
- E. Normal mode is the default ADOM mode.

Answer: CD

NEW QUESTION 29

After you have moved a registered logging device out of one ADOM and into a new ADOM, what is the purpose of running the following CLI command?

`execute sql-local rebuild-adom <new-ADOM-name>`

- A. To reset the disk quota enforcement to default
- B. To remove the analytics logs of the device from the old database
- C. To migrate the archive logs to the new ADOM
- D. To populate the new ADOM with analytical logs for the moved device, so you can run reports

Answer: D

Explanation:

- Are the device's analytics logs required for reports in the *new* ADOM? If so, rebuild the new ADOM database:
`# exe sql-local rebuild-adom <new-ADOM-name>`

NEW QUESTION 30

Refer to the exhibit.

Event	Event Status	Event Type	Count	Severity
151.101.54.62 (1) Insecure SSL Connection blocked from 10.0.3.20	Mitigated	SSL	1	Low

Which statement is correct regarding the event displayed?

- A. The security risk was blocked or dropped.
- B. The security event risk is considered open.
- C. An incident was created from this event.
- D. The risk source is isolated.

Answer: A

NEW QUESTION 31

Which two statements about log forwarding are true? (Choose two.)

- A. Forwarded logs cannot be filtered to match specific criteria.
- B. Logs are forwarded in real-time only.
- C. The client retains a local copy of the logs after forwarding.
- D. You can use aggregation mode only with another FortiAnalyzer.

Answer: CD

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/420493/modes> <https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/621804/log-forwarding>

NEW QUESTION 34


What are the operating modes of FortiAnalyzer? (Choose two)

- A. Standalone
- B. Manager
- C. Analyzer
- D. Collector

Answer: CD

NEW QUESTION 39

Refer to the exhibit.

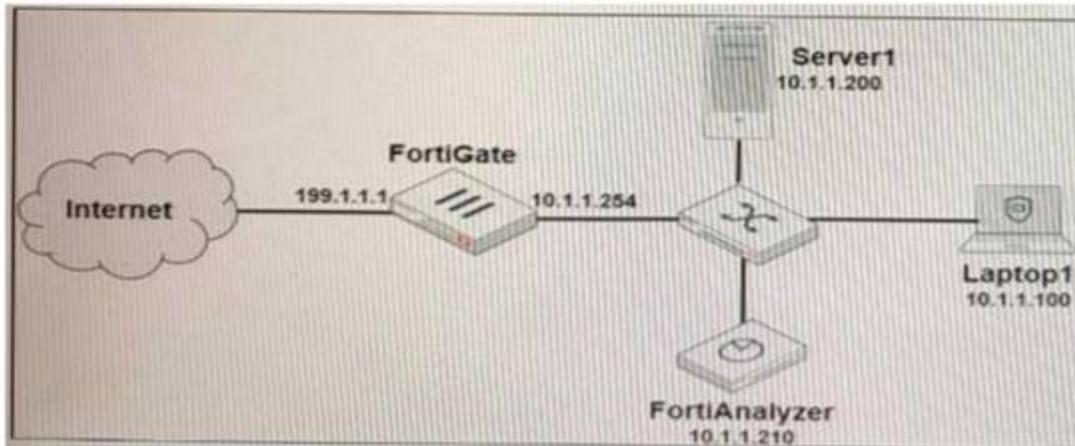

Laptop1 is used by several administrators to manage FortiAnalyzer. You want to configure a generic text filter that matches all login attempts to the web interface generated by any user other than "admin" and coming from Laptop1: Which filter will achieve the desired result?

- A. operation—login & performed_on==BGUI(10.1.1.100)" & user!=admin
- B. operation—login & srcip=10.1.1.100 & dstip==10.1.1.210 & user=admin
- C. operation—login & performed1_on=,'GUI(10.1.1.210)" & user!=admin
- D. operation—login & dstip=10.1.1.210 & user1—admin

Answer: C

NEW QUESTION 43

You have recently grouped multiple FortiGate devices into a single ADOM. System Settings > Storage Info shows the quota used. What does the disk quota refer to?

- A. The maximum disk utilization for each device in the ADOM
- B. The maximum disk utilization for the FortiAnalyzer model
- C. The maximum disk utilization for the ADOM type
- D. The maximum disk utilization for all devices in the ADOM

Answer: D

NEW QUESTION 45

What happens when a log file saved on FortiAnalyzer disks reaches the size specified in the device log settings?

- A. The log file is stored as a raw log and is available for analytic support.
- B. The log file rolls over and is archived.
- C. The log file is purged from the database.
- D. The log file is overwritten.

Answer: B

NEW QUESTION 49

Which two statements are true regarding high availability (HA) on FortiAnalyzer? (Choose two.)

- A. FortiAnalyzer HA can function without VRR
- B. and VRRP is required only if you have more than two FortiAnalyzer devices in a cluster.
- C. FortiAnalyzer HA supports synchronization of logs as well as some system and configuration settings.
- D. All devices in a FortiAnalyzer HA cluster must run in the same operation mode: analyzer or collector.

E. FortiAnalyzer HA implementation is supported by many public cloud infrastructures such as AWS, Microsoft Azure, and Google Cloud.

Answer: BC

NEW QUESTION 52

What purposes does the auto-cache setting on reports serve? (Choose two.)

- A. To reduce report generation time
- B. To automatically update the hcache when new logs arrive
- C. To reduce the log insert lag rate
- D. To provide diagnostics on report generation time

Answer: AB

NEW QUESTION 57

What is the purpose of output variables?

- A. To store playbook execution statistics
- B. To use the output of the previous task as the input of the current task
- C. To display details of the connectors used by a playbook
- D. To save all the task settings when a playbook is exported

Answer: A

NEW QUESTION 61

Which statements are correct regarding FortiAnalyzer reports? (Choose two)

- A. FortiAnalyzer provides the ability to create custom reports.
- B. FortiAnalyzer allows you to schedule reports to run.
- C. FortiAnalyzer includes pre-defined reports only.
- D. FortiAnalyzer allows reporting for FortiGate devices only.

Answer: AB

NEW QUESTION 65

What statements are true regarding the "store and upload" log transfer option between FortiAnalyzer and FortiGate? (Choose three.)

- A. All FortiGates can send logs to FortiAnalyzer using the store and upload option.
- B. Only FortiGate models with hard disks can send logs to FortiAnalyzer using the store and upload option.
- C. Both secure communications methods (SSL and IPsec) allow the store and upload option.
- D. Disk logging is enabled on the FortiGate through the CLI only.
- E. Disk logging is enabled by default on the FortiGate.

Answer: BCD

NEW QUESTION 66

You need to upgrade your FortiAnalyzer firmware.

What happens to the logs being sent to FortiAnalyzer from FortiGate during the time FortiAnalyzer is temporarily unavailable?

- A. FortiAnalyzer uses log fetching to retrieve the logs when back online
- B. FortiGate uses the miglogd process to cache the logs
- C. The logfiled process stores logs in offline mode
- D. Logs are dropped

Answer: B

Explanation:

If FortiAnalyzer becomes unavailable to FortiGate for any reason, FortiGate uses its *miglogd* process to cache the logs. There is a maximum value to the cache size, and the *miglogd* process will drop cached logs. When the connection between the two devices is restored, the *miglogd* process begins to send the cached logs to FortiAnalyzer. Therefore, the FortiGate buffer will keep logs long enough to sustain a reboot of your FortiAnalyzer (if you are upgrading the firmware, for example). But it is not intended for a lengthy FortiAnalyzer outage.

NEW QUESTION 70

In the FortiAnalyzer FortiView, source and destination IP addresses from FortiGate devices are not resolving to a hostname.

How can you resolve the source and destination IP addresses, without introducing any additional performance impact to FortiAnalyzer?

- A. Resolve IP addresses on a per-ADOM basis to reduce delay on FortiView while IPs resolve
- B. Configure # set resolve-ip enable in the system FortiView settings
- C. Configure local DNS servers on FortiAnalyzer
- D. Resolve IP addresses on FortiGate

Answer: D

Explanation:

<https://packetplant.com/fortigate-and-fortianalyzer-resolve-source-and-destination-ip/>

“As a best practice, it is recommended to resolve IPs on the FortiGate end. This is because you get both source and destination, and it offloads the work from FortiAnalyzer. On FortiAnalyzer, this IP resolution does destination IPs only”

NEW QUESTION 73

Which tabs do not appear when FortiAnalyzer is operating in Collector mode?

- A. FortiView
- B. Event Management
- C. Device Manger
- D. Reporting

Answer: B

NEW QUESTION 76

For which two purposes would you use the command set log checksum? (Choose two.)

- A. To help protect against man-in-the-middle attacks during log upload from FortiAnalyzer to an SFTP server
- B. To prevent log modification or tampering
- C. To encrypt log communications
- D. To send an identical set of logs to a second logging server

Answer: AB

NEW QUESTION 78

If you upgrade your FortiAnalyzer firmware, what report elements can be affected?

- A. Output profiles
- B. Report settings
- C. Report scheduling
- D. Custom datasets

Answer: D

NEW QUESTION 80

On FortiAnalyzer, what is a wildcard administrator account?

- A. An account that permits access to members of an LDAP group
- B. An account that allows guest access with read-only privileges
- C. An account that requires two-factor authentication
- D. An account that validates against any user account on a FortiAuthenticator

Answer: A

Explanation:

<https://docs.fortinet.com/document/fortigate/6.2.0/cookbook/747268/configuring-wildcard-admin-accounts>

NEW QUESTION 85

FortiAnalyzer uses the Optimized Fabric Transfer Protocok (OFTP) over SSL for what purpose?

- A. To upload logs to an SFTP server
- B. To prevent log modification during backup
- C. To send an identical set of logs to a second logging server
- D. To encrypt log communication between devices

Answer: D

NEW QUESTION 86

Which log type does the FortiAnalyzer indicators of compromise feature use to identify infected hosts?

- A. Antivirus logs
- B. Web filter logs
- C. IPS logs
- D. Application control logs

Answer: B

NEW QUESTION 90

Which statements are true regarding securing communications between FortiAnalyzer and FortiGate with IPsec? (Choose two.)

- A. Must configure the FortiAnalyzer end of the tunnel only--the FortiGate end is auto-negotiated.
- B. Must establish an IPsec tunnel ID and pre-shared key.
- C. IPsec cannot be enabled if SSL is enabled as well.
- D. IPsec is only enabled through the CLI on FortiAnalyzer.

Answer: C

NEW QUESTION 92

Which two statements are true regarding FortiAnalyzer log forwarding? (Choose two.)

- A. In aggregation mode, you can forward logs to syslog and CEF servers as well.
- B. Forwarding mode forwards logs in real time only to other FortiAnalyzer devices.
- C. Aggregation mode stores logs and content files and uploads them to another FortiAnalyzer device at a scheduled time.
- D. Both modes, forwarding and aggregation, support encryption of logs between devices.

Answer: BC

NEW QUESTION 94

What are two advantages of setting up fabric ADOM? (Choose two.)

- A. It can be used for fast data processing and log correlation
- B. It can be used to facilitate communication between devices in same Security Fabric
- C. It can include all Fortinet devices that are part of the same Security Fabric
- D. It can include only FortiGate devices that are part of the same Security Fabric

Answer: AC

Explanation:

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/448471/creating-a-security-fabric-a>

NEW QUESTION 95

Logs are being deleted from one of your ADOMs earlier than the configured setting for archiving in your data policy. What is the most likely problem?

- A. The total disk space is insufficient and you need to add other disk.
- B. CPU resources are too high.
- C. The ADOM disk quota is set too low based on log rates.
- D. Logs in that ADOM are being forwarded in real-time to another FortiAnalyzer device.

Answer: C

Explanation:

https://help.fortinet.com/fmgr/50hlp/56/5-6-1/FMG_FAZ/1100_Storage/0017_Deleted%20device%20logs.htm

<https://docs.fortinet.com/document/fortianalyzer/6.2.5/administration-guide/87802/automatic-deletion>

NEW QUESTION 97

Logs are being deleted from one of the ADOMs earlier than the configured setting for archiving in the data policy. What is the most likely problem?

- A. CPU resources are too high
- B. Logs in that ADOM are being forwarded, in real-time, to another FortiAnalyzer device
- C. The total disk space is insufficient and you need to add other disk
- D. The ADOM disk quota is set too low, based on log rates

Answer: D

NEW QUESTION 101

A play book contains five tasks in total. An administrator executed the playbook and four out of five tasks finished successfully, but one task failed. What will be the status of the playbook after its execution?

- A. Success
- B. Failed
- C. Running
- D. Upstream_failed

Answer: A

NEW QUESTION 104

For which two SAML roles can the FortiAnalyzer be configured? (Choose two.)

- A. Principal
- B. Service provider
- C. Identity collector
- D. Identity provider

Answer: BD

NEW QUESTION 107

For proper log correlation between the logging devices and FortiAnalyzer, FortiAnalyzer and all registered devices should:


- A. Use DNS

- B. Use host name resolution
- C. Use real-time forwarding
- D. Use an NTP server

Answer: D

NEW QUESTION 110

Refer to the exhibit.

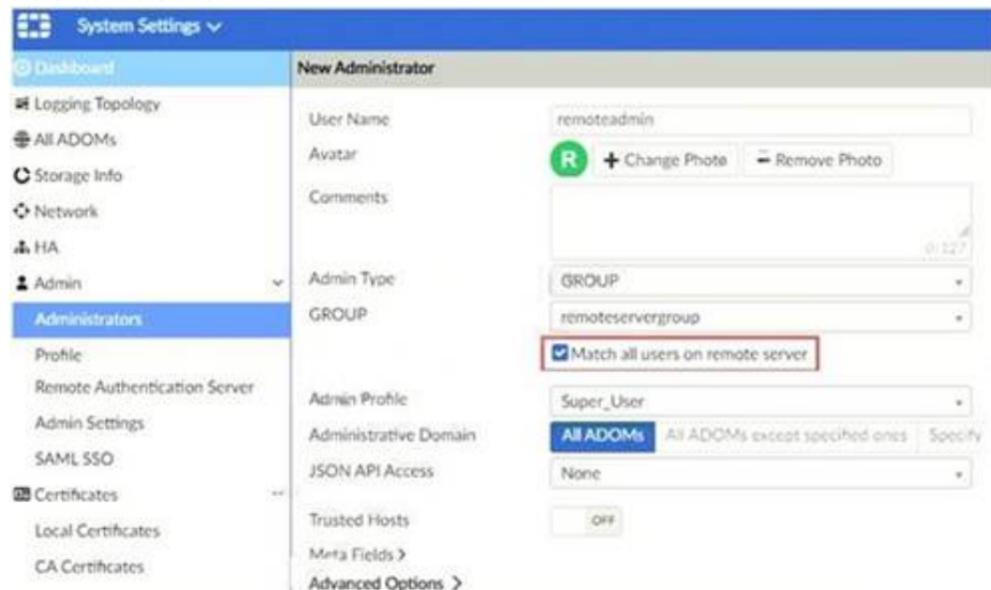

The exhibit shows “remoteservergroup” is an authentication server group with LDAP and RADIUS servers. Which two statements express the significance of enabling “Match all users on remote server” when configuring a new administrator? (Choose two.)

- A. It creates a wildcard administrator using LDAP and RADIUS servers.
- B. Administrator can log in to FortiAnalyzer using their credentials on remote servers LDAP and RADIUS.
- C. Use remoteadmin from LDAP and RADIUS servers will be able to log in to FortiAnalyzer at anytime.
- D. It allows administrators to use two-factor authentication.

Answer: AB

NEW QUESTION 111


An administrator fortinet, is able to view logs and perform device management tasks, such as adding and removing registered devices. However, administrator fortinet is not able to create a mail server that can be used to send email. What could be the problem?

- A. Fortinet is assigned the Standard_ User administrator profile.
- B. A trusted host is configured.
- C. ADOM mode is configured with Advanced mode.
- D. Fortinet is assigned the Restricted_ User administrator profile.

Answer: A

NEW QUESTION 115

Refer to the exhibit.

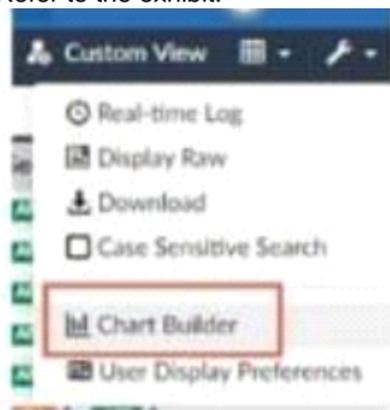

What is the purpose of using the Chart Builder feature on FortiAnalyzer?

- A. In Log View, this feature allows you to build a dataset and chart automatically, based on the filtered search results.
- B. In Log View, this feature allows you to build a chart and chart automatically, on the top 100 log entries.
- C. This feature allows you to build a chart under FortiView.
- D. You can add charts to generated reports using this feature.

Answer: A

NEW QUESTION 117

What can the CLI command # diagnose test application oftpd 3 help you to determine?

- A. What devices and IP addresses are connecting to FortiAnalyzer
- B. What logs, if any, are reaching FortiAnalyzer

- C. What ADOMs are enabled and configured
- D. What devices are registered and unregistered

Answer: A

Explanation:

https://docs.fortinet.com/document/fortianalyzer/6.2.5/cli-reference/395556/test#test_application

NEW QUESTION 118

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

NSE5_FAZ-7.2 Practice Exam Features:

- * NSE5_FAZ-7.2 Questions and Answers Updated Frequently
- * NSE5_FAZ-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE5_FAZ-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE5_FAZ-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE5_FAZ-7.2 Practice Test Here](#)