



Microsoft

Exam Questions AZ-204

Developing Solutions for Microsoft Azure (beta)

About ExamBible

Your Partner of IT Exam

Found in 1998

ExamBible is a company specialized on providing high quality IT exam practice study materials, especially Cisco CCNA, CCDA, CCNP, CCIE, Checkpoint CCSE, CompTIA A+, Network+ certification practice exams and so on. We guarantee that the candidates will not only pass any IT exam at the first attempt but also get profound understanding about the certificates they have got. There are so many alike companies in this industry, however, ExamBible has its unique advantages that other companies could not achieve.

Our Advances

* 99.9% Uptime

All examinations will be up to date.

* 24/7 Quality Support

We will provide service round the clock.

* 100% Pass Rate

Our guarantee that you will pass the exam.

* Unique Gurantee

If you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

NEW QUESTION 1

- (Exam Topic 1)

You need to support the message processing for the ocean transport workflow.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Answer Area
Create an integration account in the Azure portal.	
Link the custom connector to the Logic App.	
Update the Logic App to use the partners, schemas, certificates, maps, and agreements.	⬅️ ➡️
Create a custom connector for the Logic App.	⬆️ ⬇️
Add partners, schemas, certificates, maps, and agreements.	
Link the Logic App to the integration account.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Create an integration account in the Azure portal

You can define custom metadata for artifacts in integration accounts and get that metadata during runtime for your logic app to use. For example, you can provide metadata for artifacts, such as partners, agreements, schemas, and maps - all store metadata using key-value pairs.

Step 2: Link the Logic App to the integration account

A logic app that's linked to the integration account and artifact metadata you want to use. Step 3: Add partners, schemas, certificates, maps, and agreements

Step 4: Create a custom connector for the Logic App. References:

<https://docs.microsoft.com/bs-latn-ba/azure/logic-apps/logic-apps-enterprise-integration-metadata>

NEW QUESTION 2

- (Exam Topic 1)

You need to update the APIs to resolve the testing error.

How should you complete the Azure CLI command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```
az webapp cors add -g shipping-apis-test-rg -n web
```

cors	add
config	up
deployment	remove

slot	http://*.wideworldimporters.com
allowed-origins	http://test-shippingapi.wideworldimporters.com
name	http://test.wideworldimporters.com
	http://www.wideworldimporters.com

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Enable Cross-Origin Resource Sharing (CORS) on your Azure App Service Web App.
 Enter the full URL of the site you want to allow to access your WEB API or * to allow all domains. Box 1: cors
 Box 2: add
 Box 3: allowed-origins
 Box 4: http://testwideworldimporters.com/ References:
<http://donovanbrown.com/post/How-to-clear-No-Access-Control-Allow-Origin-header-error-with-Azure-App-Service>

NEW QUESTION 3

- (Exam Topic 1)
 You need to correct the VM issues.
 Which tools should you use? To answer, select the appropriate options in the answer area.
 NOTE: Each correct selection is worth one point.

Issue	Tool
Backup and Restore	<div style="border: 1px solid gray; padding: 5px;"> <div style="border-bottom: 1px solid gray; padding: 2px 5px;"></div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">Azure Site Recovery</div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">Azure Backup</div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">Azure Data Box</div> <div style="padding: 2px 5px;">Azure Migrate</div> </div>
Performance	<div style="border: 1px solid gray; padding: 5px;"> <div style="border-bottom: 1px solid gray; padding: 2px 5px;"></div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">Azure Network Watcher</div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">Azure Traffic Manager</div> <div style="border-bottom: 1px solid gray; padding: 2px 5px;">ExpressRoute</div> <div style="padding: 2px 5px;">Accelerated Networking</div> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Backup and Restore: Azure Backup
 Scenario: The VM is critical and has not been backed up in the past. The VM must enable a quick restore from a 7-day snapshot to include in-place restore of disks in case of failure.
 In-Place restore of disks in IaaS VMs is a feature of Azure Backup. Performance: Accelerated Networking
 Scenario: The VM shows high network latency, jitter, and high CPU utilization.
 Accelerated networking enables single root I/O virtualization (SR-IOV) to a VM, greatly improving its networking performance. This high-performance path bypasses the host from the datapath, reducing latency, jitter, and CPU utilization, for use with the most demanding network workloads on supported VM types.
 References:
<https://azure.microsoft.com/en-us/blog/an-easy-way-to-bring-back-your-azure-vm-with-in-place-restore/>

NEW QUESTION 4

- (Exam Topic 3)
 Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this question, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You are developing a website that will run as an Azure Web App. Users will authenticate by using their Azure Active Directory (Azure AD) credentials. You plan to assign users one of the following permission levels for the website: admin, normal, and reader. A user's Azure AD group membership must be used to determine the permission level. You need to configure authorization.
 Solution: Configure the Azure Web App for the website to allow only authenticated requests and require Azure AD log on.
 Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Instead in the Azure AD application's manifest, set value of the groupMembershipClaims option to All. References:
<https://blogs.msdn.microsoft.com/waws/2017/03/13/azure-app-service-authentication-aad-groups/>

NEW QUESTION 5

- (Exam Topic 3)

You must ensure that the external party cannot access the data in the SSN column of the Person table.

Will each protection method meet the requirement? To answer, drag the appropriate responses to the correct protection methods. Each response may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Responses	Protection method	Response
<input type="checkbox"/> Yes	Enable AlwaysOn encryption.	<input type="checkbox"/>
<input type="checkbox"/> No	Set the column encryption setting to disabled.	<input type="checkbox"/>
	Assign users to the Public fixed database role.	<input type="checkbox"/>
	Store column encryption keys in the system catalog view in the database.	<input type="checkbox"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

You can configure Always Encrypted for individual database columns containing your sensitive data. When setting up encryption for a column, you specify the information about the encryption algorithm and cryptographic keys used to protect the data in the column.

Box 2: No

Box 3: Yes

In SQL Database, the VIEW permissions are not granted by default to the public fixed database role. This enables certain existing, legacy tools (using older versions of DacFx) to work properly. Consequently, to work with encrypted columns (even if not decrypting them) a database administrator must explicitly grant the two VIEW permissions.

Box 4: No

All cryptographic keys are stored in an Azure Key Vault. References:

<https://docs.microsoft.com/en-us/sql/relational-databases/security/encryption/always-encrypted-database-engine>

NEW QUESTION 6

- (Exam Topic 3)

You are developing a microservices solution. You plan to deploy the solution to a multinode Azure Kubernetes Service (AKS) cluster.

You need to deploy a solution that includes the following features:

- > reverse proxy capabilities
- > configurable traffic routing
- > TLS termination with a custom certificate

Which components should you use? To answer, drag the appropriate components to the correct requirements. Each component may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Answer Area

Components	Action	Component
Helm	Deploy solution.	<input type="text"/>
Draft		
Brigade	View cluster and external IP addressing.	<input type="text"/>
KubeCtl		
Ingress Controller	Implement a single, public IP endpoint that is routed to multiple microservices.	<input type="text"/>
CoreDNS		
Virtual Kubelet		

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Helm

To create the ingress controller, use Helm to install nginx-ingress. Box 2: kubectl

To find the cluster IP address of a Kubernetes pod, use the kubectl get pod command on your local machine, with the option -o wide .

Box 3: Ingress Controller

An ingress controller is a piece of software that provides reverse proxy, configurable traffic routing, and TLS termination for Kubernetes services. Kubernetes ingress resources are used to configure the ingress rules and routes for individual Kubernetes services.

Reference:

<https://docs.microsoft.com/bs-cyrl-ba/azure/aks/ingress-basic> <https://www.digitalocean.com/community/tutorials/how-to-inspect-kubernetes-networking>

NEW QUESTION 7

- (Exam Topic 3)

You are creating a script that will run a large workload on an Azure Batch pool. Resources will be reused and do not need to be cleaned up after use.

You have the following parameters:

You need to write an Azure CLI script that will create the jobs, tasks, and the pool.

In which order should you arrange the commands to develop the solution? To answer, move the appropriate commands from the list of command segments to the answer area and arrange them in the correct order.

Command segments

Answer Area

```
az batch pool create
--id mypool --vm-size Standard_A1_v2
--target-dedicated-nodes 2
--image $image
--node-agent-sku-id $sku
```

```
az batch job
create
--id myjob
--pool-id mypool
```

```
for i in {1..$numberOfJobs}
do
```

```
az batch task create
--task-id mytask$i
--job-id myjob
--command-line $script
```



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: az batch pool create
 # Create a new Linux pool with a virtual machine configuration. az batch pool create \
 --id mypool \
 --vm-size Standard_A1 \
 --target-dedicated 2 \
 --image canonical:ubuntu:16.04-LTS \
 --node-agent-sku-id "batch.node.ubuntu 16.04" Step 2: az batch job create
 # Create a new job to encapsulate the tasks that are added. az batch job create \
 --id myjob \
 --pool-id mypool
 Step 3: az batch task create
 # Add tasks to the job. Here the task is a basic shell command. az batch task create \
 --job-id myjob \
 --task-id task1 \
 --command-line "/bin/bash -c 'printenv AZ_BATCH_TASK_WORKING_DIR'" Step 4: for i in {1..\$numberOfJobs} do
 References:
<https://docs.microsoft.com/bs-latn-ba/azure/batch/scripts/batch-cli-sample-run-job>

NEW QUESTION 8

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this question, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

Margie's Travel is an international travel and bookings management service. The company is expanding into restaurant bookings. You are tasked with implementing Azure Search for the restaurants listed in their solution.

You create the index in Azure Search.

You need to import the restaurant data into the Azure Search service by using the Azure Search .NET SDK. Solution:

- * 1. Create a SearchIndexClient object to connect to the search index.
- * 2. Create a DataContainer that contains the documents which must be added.
- * 3. Create a DataSource instance and set its Container property to the DataContainer.
- * 4. Call the Documents.Suggest method of the SearchIndexClient and pass the DataSource. Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Use the following method:

- * 1. - Create a SearchIndexClient object to connect to the search index
- * 2. - Create an IndexBatch that contains the documents which must be added.
- * 3. - Call the Documents.Index method of the SearchIndexClient and pass the IndexBatch. References:

<https://docs.microsoft.com/en-us/azure/search/search-howto-dotnet-sdk>

NEW QUESTION 9

- (Exam Topic 3)

You develop an app that allows users to upload photos and videos to Azure storage. The app uses a storage REST API call to upload the media to a blob storage account named Account1. You have blob storage containers named Container1 and Container2. Uploading of videos occurs on an irregular basis. You need to copy specific blobs from Container1 to Container2 in real time when specific requirements are met, excluding backup blob copies. What should you do?

- A. Download the blob to a virtual machine and then upload the blob to Container2.
- B. Run the Azure PowerShell command Start-AzureStorageBlobCopy.
- C. Copy blobs to Container2 by using the Put Blob operation of the Blob Service REST API.
- D. Use AzCopy with the Snapshot switch blobs to Container2.

Answer: B

Explanation:

The Start-AzureStorageBlobCopy cmdlet starts to copy a blob. Example 1: Copy a named blob

```
C:\PS>Start-AzureStorageBlobCopy -SrcBlob "ContosoPlanning2015" -DestContainer "ContosoArchives" -SrcContainer "ContosoUploads"
```

This command starts the copy operation of the blob named ContosoPlanning2015 from the container named ContosoUploads to the container named ContosoArchives.

References:

<https://docs.microsoft.com/en-us/powershell/module/azure.storage/start-azuresstorageblobcopy?view=azurermps>

NEW QUESTION 10

- (Exam Topic 3)

You are developing an app that manages users for a video game. You plan to store the region, email address, and phone number for the player. Some players may not have a phone number. The player's region will be used to load-balance data.

Data for the app must be stored in Azure Table Storage.

You need to develop code to retrieve data for an individual player.

How should you complete the code? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

```
public class PlayerEntity : TableEntity
{
    public PlayerEntity()
    {
    }
    public PlayerEntity(string region, string email)
    {
        PartitionKey =  ;
        RowKey =  ;
    }
    public string Phone { get; set; }
}
public class Player
{
    protected PlayerEntity player;
    async void GetPlayer(string cs,  table, string pk, string rk)
    {
        
        TEntity query =TableEntity.Retrieve<PlayerEntity>(pk, rk);
        TableOperation query =TableOperation.Retrieve<PlayerEntity>(pk,rk);
        TableResult query =TableQuery.Retrieve<PlayerEntity>(pk,rk);
        TableResultSegment query =TableResult.Retrieve<PlayerEntity>(pk, rk);

        TEntity data =await table.ExecuteAsync(query);
        TableOperation data =await table.ExeucteAsync(query);
        TableQuery data =await table.ExecuteAsync(query);
        TableResult data =await table.ExecuteAsync(query);
        player=data.Result as PlayerEntity;
    }
}
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: region

The player's region will be used to load-balance data. Choosing the PartitionKey.

The core of any table's design is based on its scalability, the queries used to access it, and storage operation requirements. The PartitionKey values you choose will dictate how a table will be partitioned and the type of queries that can be used. Storage operations, in particular inserts, can also affect your choice of PartitionKey values.

Box 2: email

Not phone number some players may not have a phone number. Box 3: CloudTable

Box 4 : TableOperation query =.. Box 5: TableResult

References:

<https://docs.microsoft.com/en-us/rest/api/storageservices/designing-a-scalable-partitioning-strategy-for-azure-ta>

NEW QUESTION 10

- (Exam Topic 3)

You are developing a data storage solution for a social networking app.

The solution requires a mobile app that stores user information using Azure Table Storage.

You need to develop code that can insert multiple sets of user information.

How should you complete the code? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

```
CloudStorageAccount storageAccount = CloudStorageAccount.Parse(
    ConfigurationManager.GetSetting("StorageConnectionString"));
CloudTableClient tableClient = storageAccount.CreateCloudTableClient();
CloudTable table = tableClient.GetTableReference("clients");
Table.CreateIfNotExists();
```



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1, Box 2: TableBatchOperation Create the batch operation.

TableBatchOperation op = new TableBatchOperation(); Box 3: ExecuteBatch / Execute the batch operation. table.ExecuteBatch(op);

Note: You can insert a batch of entities into a table in one write operation. Some other notes on batch operations:

You can perform updates, deletes, and inserts in the same single batch operation. A single batch operation can include up to 100 entities.

All entities in a single batch operation must have the same partition key.

While it is possible to perform a query as a batch operation, it must be the only operation in the batch. References:

<https://docs.microsoft.com/en-us/azure/cosmos-db/table-storage-how-to-use-dotnet>

NEW QUESTION 12

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are developing an Azure solution to collect point-of-sale (POS) device data from 2,000 stores located throughout the world. A single device can produce 2 megabytes (MB) of data every 24 hours. Each store location has one to five devices that send data.

You must store the device data in Azure Blob storage. Device data must be correlated based on a device identifier. Additional stores are expected to open in the future.

You need to implement a solution to receive the device data.

Solution: Provision an Azure Service Bus. Configure a topic to receive the device data by using a correlation filter.

Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

A message is raw data produced by a service to be consumed or stored elsewhere. The Service Bus is for high-value enterprise messaging, and is used for order processing and financial transactions.

Reference:

<https://docs.microsoft.com/en-us/azure/event-grid/compare-messaging-services>

NEW QUESTION 13

- (Exam Topic 3)

You develop and deploy a Java RESTful API to Azure App Service.

You open a browser and navigate to the URL for the API. You receive the following error message:

```
Failed to load http://api.azurewebsites.net:6000/#/api/Products: No 'Access-Control-Allow-Origin' header is present on the requested resource. Origin 'http://localhost:6000' is therefore not allowed access
```

You need to resolve the error.

What should you do?

- A. Bind an SSL certificate
- B. Enable authentication
- C. Enable CORS
- D. Map a custom domain
- E. Add a CDN

Answer: C

Explanation:

We need to enable Cross-Origin Resource Sharing (CORS). References:

<https://medium.com/@xinganwang/a-practical-guide-to-cors-51e8fd329a1f>

NEW QUESTION 18

- (Exam Topic 3)

Your company is migrating applications to Azure. The IT department must allow internal developers to communicate with Microsoft support.

The service agents of the IT department must only have view resources and create support ticket permissions to all subscriptions. A new custom role must be created by reusing a default role definition and changing the permissions.

You need to create the custom role.

To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Item	Value
Powershell command	<div style="border: 1px solid gray; padding: 5px;"> <pre>Get-AzureRmRoleDefinition-Name "Reader" ConvertTo-Json Out-File C:\SupportRole.json Get-AzureRmRoleDefinition-Name "Operator" ConvertTo-Json Out-File C:\SupportRole.json Set-AzureRmRoleDefinition-Name "Reader" Input-File C:\SupportRole.json Set-AzureRmRoleDefinition Input-File C:\SupportRole.json</pre> </div>
Actions section	<div style="border: 1px solid gray; padding: 5px;"> <pre>"/read", "Microsoft.Support/*" "/read" "*/read", "Microsoft.Support/*" "*/read"</pre> </div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Set-AzureRmRoleDefinition Input-File C:\SupportRole.json

The Set-AzureRmRoleDefinition cmdlet updates an existing custom role in Azure Role-Based Access Control. Provide the updated role definition as an input to the command as a JSON file or a PSRoleDefinition object.

The role definition for the updated custom role MUST contain the Id and all other required properties of the role even if they are not updated: DisplayName, Description, Actions, AssignableScope

Box 2: "*/read", "Microsoft.Support/*" Microsoft.Support/* Create and manage support tickets "Microsoft.Support" role definition azure

NEW QUESTION 21

- (Exam Topic 3)

You are developing an Azure Cosmos DB solution by using the Azure Cosmos DB SQL API. The data includes millions of documents. Each document may contain hundreds of properties.

The properties of the documents do not contain distinct values for partitioning. Azure Cosmos DB must scale individual containers in the database to meet the performance needs of the application by spreading the workload evenly across all partitions over time.

You need to select a partition key.

Which two partition keys can you use? Each correct answer presents a complete solution. NOTE: Each correct selection is worth one point.

- A. a concatenation of multiple property values with a random suffix appended
- B. a single property value that does not appear frequently in the documents
- C. a hash suffix appended to a property value
- D. a value containing the collection name

E. a single property value that appears frequently in the documents

Answer: AC

Explanation:

You can form a partition key by concatenating multiple property values into a single artificial partitionKey property. These keys are referred to as synthetic keys. Another possible strategy to distribute the workload more evenly is to append a random number at the end of the partition key value. When you distribute items in this way, you can perform parallel write operations across partitions.

Note: It's the best practice to have a partition key with many distinct values, such as hundreds or thousands. The goal is to distribute your data and workload evenly across the items associated with these partition key values. If such a property doesn't exist in your data, you can construct a synthetic partition key.

References:

<https://docs.microsoft.com/en-us/azure/cosmos-db/synthetic-partition-keys>

NEW QUESTION 22

- (Exam Topic 3)

You are building a website to access project data related to terms within your organization. The website does not allow anonymous access. Authentication performed using an Azure Active Directory (Azure AD) app named internal.

The website has the following authentication requirements:

- Azure AD users must be able to login to the website.
- Personalization of the website must be based on membership in Active Directory groups. You need to configure the application's manifest to meet the authentication requirements.

How should you configure the manifest? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```

{
  ...
  "appId": "d61126e3-089b-4adb-b721-
d5023213df7d",
  [Box 1] : "All",
  [Box 2] : true
  ...
}

```

Box 1 dropdown menu options: "optionalClaims", "groupMembershipClaims"

Box 2 dropdown menu options: "allowPublicClient", "oauth2Permissions", "requiredResourceAccess", "oauth2AllowImplicitFlow"

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: groupMembershipClaims

Scenario: Personalization of the website must be based on membership in Active Directory groups. Group claims can also be configured in the Optional Claims section of the Application Manifest. Enable group membership claims by changing the groupMembershipClaim

The valid values are: "All" "SecurityGroup" "DistributionList" "DirectoryRole"

Box 2: oauth2Permissions

Scenario: Azure AD users must be able to login to the website.

oauth2Permissions specifies the collection of OAuth 2.0 permission scopes that the web API (resource) app exposes to client apps. These permission scopes may be granted to client apps during consent.

NEW QUESTION 26

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution. Determine whether the solution meets the stated goals.

You are developing and deploying several ASP.Net web applications to Azure App Service. You plan to save session state information and HTML output. You must use a storage mechanism with the following requirements:

- Share session state across all ASP.NET web applications
- Support controlled, concurrent access to the same session state data for multiple readers and a single writer
- Save full HTTP responses for concurrent requests You need to store the information.

Proposed Solution: Deploy and configure an Azure Database for PostgreSQL. Update the web applications. Does the solution meet the goal?

- A. Yes

B. No

Answer: B

NEW QUESTION 29

- (Exam Topic 3)

Contoso, Ltd. provides an API to customers by using Azure API Management (APIM). The API authorizes users with a JWT token.

You must implement response caching for the APIM gateway. The caching mechanism must detect the user ID of the client that accesses data for a given location and cache the response for that user ID.

You need to add the following policies to the policies file:

- a set-variable policy to store the detected user identity
- a cache-lookup-value policy
- a cache-store-value policy
- a find-and-replace policy to update the response body with the user profile information

To which policy section should you add the policies? To answer, drag the appropriate sections to the correct policies. Each section may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content

NOTE: Each correct selection is worth one point

Answer Area

Policy section	Policy	Policy section
	Set-variable	<input type="text"/>
<input type="text" value="Inbound"/>	Cache-lookup-value	<input type="text"/>
<input type="text" value="Outbound"/>	Cache-store-value	<input type="text"/>
	Find-and-replace	<input type="text"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Inbound.

A set-variable policy to store the detected user identity. Example:

```
<policies>
<inbound>
<!-- How you determine user identity is application dependent -->
<set-variable name="enduserid"
value="@ (context.Request.Headers.GetValueOrDefault("Authorization","").Split(' ')[1].AsJwt()?.Subject)" />
Box 2: Inbound
```

A cache-lookup-value policy Example:

```
<inbound>
<base />
<cache-lookup vary-by-developer="true | false" vary-by-developer-groups="true | false" downstream-caching-type="none | private | public" must-revalidate="true | false">
<vary-by-query-parameter>parameter name</vary-by-query-parameter> <!-- optional, can repeated several times -->
</cache-lookup>
</inbound>
```

Box 3: Outbound

A cache-store-value policy. Example:

```
<outbound>
<base />
<cache-store duration="3600" />
</outbound>
Box 4: Outbound
```

A find-and-replace policy to update the response body with the user profile information. Example:

```
<outbound>
<!-- Update response body with user profile-->
<find-and-replace from="$userprofile$"
to="@ ((string)context.Variables["userprofile"])" />
<base />
</outbound>
```

Reference:

- <https://docs.microsoft.com/en-us/azure/api-management/api-management-caching-policies>
- <https://docs.microsoft.com/en-us/azure/api-management/api-management-sample-cache-by-key>

NEW QUESTION 31

- (Exam Topic 3)

You are developing an application that uses Azure Storage Queues. You have the following code:

```

CloudStorageAccount storageAccount = CloudStorageAccount.Parse
(CloudConfigurationManager.GetSetting("StorageConnectionString"));
CloudQueueClient queueClient = storageAccount.CreateCloudQueueClient()

CloudQueue queue = queueClient.GetQueueReference("appqueue") ;
await queue.CreateIfNotExistsAsync() ;

CloudQueueMessage peekedMessage = await queue.PeekMessageAsync() ;
if (peekedMessage != null)
{
    Console.WriteLine("The peeked message is: {0}", peekedMessage.AsString);
}
CloudQueueMessage message = await queue.GetMessageAsync() ;
    
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
 NOTE: Each correct selection is worth one point.

Answer Area

Statement	Yes	No
The code configures the lock duration for the queue.	<input type="radio"/>	<input type="radio"/>
The last message read remains in the queue after the code runs.	<input type="radio"/>	<input type="radio"/>
The storage queue remains in the storage account after the code runs.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: No

The QueueDescription.LockDuration property gets or sets the duration of a peek lock; that is, the amount of time that the message is locked for other receivers. The maximum value for LockDuration is 5 minutes; the default value is 1 minute.

Box 2: Yes

You can peek at the message in the front of a queue without removing it from the queue by calling the PeekMessage method.

Box 3: Yes Reference:

<https://docs.microsoft.com/en-us/azure/storage/queues/storage-dotnet-how-to-use-queues> <https://docs.microsoft.com/en-us/dotnet/api/microsoft.servicebus.messaging.queuedescription.lockduration>

NEW QUESTION 34

- (Exam Topic 3)

You have an app that stores player scores for an online game. The app stores data in Azure tables using a class named PlayerScore as the table entity. The table is populated with 100,000 records.

You are reviewing the following section of code that is intended to retrieve 20 records where the player score exceeds 15,000. (Line numbers are included for reference only.)

```

1 public void GetScore(string playerId, int score, string gameName)
2 {
3     TableQuery<DynamicTableEntity> query = new TableQuery<DynamicTableEntity>().Select(new string[] { "Score" })
        .Where(TableQuery.GenerateFilterConditionForInt("Score", QueryComparisons.GreaterThanOrEqual, 15000)).Take
(20);
4     EntityResolver<KeyValuePair<string, int?>> resolver =
        (partitionKey, rowKey, ts, props, etag) => new KeyValuePair<string, int?>(rowKey, props["Score"].Int32Value);
5     foreach (var scoreItem in scoreTable.ExecuteQuery(query, resolver, null, null))
6     {
7         Console.WriteLine($"{scoreItem.Key} {scoreItem.Value}");
8     }

9     public class PlayerScore : TableEntity
10 {
11     public PlayerScore(string gameId, string playerId, int score, long timePlayed)
12     {
13         PartitionKey = gameId;
14         RowKey = playerId;
15         Score = score;
16         TimePlayed = timePlayed;
17     }
18     public int Score { get; set; }
19     public long TimePlayed { get; set; }
20 }

```

You have the following code. (Line numbers are included for reference only.)

You store customer information in an Azure Cosmos database. The following data already exists in the database:

```

01 CloudTableClient tableClient = account.CreateCloudTableClient();
02 CloudTable table = tableClient.GetTableReference("people");
03 TableQuery<CustomerEntity> query = new TableQuery<CustomerEntity>()
04     .Where(TableQuery.CombineFilters(
05     TableQuery.Generate.And, TableQuery.GenerateFilterCondition(Email, QueryComparisons.Equal, "Smith")
06     TableOperators.And, TableQuery.GenerateFilterCondition(Email, QueryComparisons.Equal,
"ssmith@contoso.com")
07 ));
08 await table.ExecuteQuerySegmentedAsync<CustomerEntity>(query, null);

```

For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

	Yes	No
The code queries the Azure table and retrieves the TimePlayed property from the table	<input type="radio"/>	<input type="radio"/>
The code will display a maximum of twenty records.	<input type="radio"/>	<input type="radio"/>
All records will be sent to the client. The client will display records for scores greater than or equal to 15,000.	<input type="radio"/>	<input type="radio"/>
The scoreItem.Key property of the KeyValuePair that ExecuteQuery returns will contain a value for PlayerID.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: No

Box 2: Yes

The TableQuery.Take method defines the upper bound for the number of entities the query returns. Example:

query.Take(10);

Box 3: Yes

Box 4: Yes

References:

<https://www.vkinfotek.com/azureqa/how-do-i-query-azure-table-storage-using-tablequery-class.html>

NEW QUESTION 35

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this question, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are developing a solution that will be deployed to an Azure Kubernetes Service (AKS) cluster. The solution will include a custom VNet, Azure Container Registry images, and an Azure Storage account.

The solution must allow dynamic creation and management of all Azure resources within the AKS cluster. You need to configure an AKS cluster for use with the Azure APIs.

Solution: Enable the Azure Policy Add-on for Kubernetes to connect the Azure Policy service to the GateKeeper admission controller for the AKS cluster. Apply a built-in policy to the cluster.

Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Instead create an AKS cluster that supports network policy. Create and apply a network to allow traffic only from within a defined namespace

References:

<https://docs.microsoft.com/en-us/azure/aks/use-network-policies>

NEW QUESTION 38

- (Exam Topic 3)

A company develops a series of mobile games. All games use a single leaderboard service. You have the following requirements:

- Code should be scalable and allow for growth.
- Each record must consist of a playedId, gameId, score, and time played.
- When users reach a new high score, the system will save the new score using the SaveScore function below.
- Each game is assigned an Id based on the series title.

You have the following code. (Line numbers are included for reference only.)

You store customer information in an Azure Cosmos database. The following data already exists in the database:

```
01 CloudTableClient tableClient = account.CreateCloudTableClient();
02 CloudTable table = tableClient.GetTableReference("people");
03 TableQuery<CustomerEntity> query = new TableQuery<CustomerEntity>()
04     .Where(TableQuery.CombineFilters(
05         TableQuery.Generate.And, TableQuery.GenerateFilterCondition(Email, QueryComparisons.Equal, "Smith")
06         TableOperators.And, TableQuery.GenerateFilterCondition(Email, QueryComparisons.Equal,
07         "ssmith@contoso.com")
08     ));
08 await table.ExecuteQuerySegmentedAsync<CustomerEntity>(query, null);
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

	Yes	No
The code will work with Cosmos DB.	<input type="radio"/>	<input type="radio"/>
The save score function will update and replace a record if one already exists with the same playerId and gameId.	<input type="radio"/>	<input type="radio"/>
The data for the game will be automatically partitioned.	<input type="radio"/>	<input type="radio"/>
This code will store the values for the gameId and playerId parameters in the database.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

Code for CosmosDB, example:

```
// Parse the connection string and return a reference to the storage account. CloudStorageAccount storageAccount = CloudStorageAccount.Parse(
CloudConfigurationManager.GetSetting("StorageConnectionString"));
```

// Create the table client.

```
CloudTableClient tableClient = storageAccount.CreateCloudTableClient();
```

// Retrieve a reference to the table.

```
CloudTable table = tableClient.GetTableReference("people");
```

```
// Create the TableOperation object that inserts the customer entity. TableOperation insertOperation = TableOperation.Insert(customer1);
```

Box 2: No
 A new record will always be added as TableOperation.Insert is used, instead of TableOperation.InsertOrReplace.

Box 3: No

No partition key is used. Box 4: Yes

References:

<https://docs.microsoft.com/en-us/azure/cosmos-db/table-storage-how-to-use-dotnet>

NEW QUESTION 39

- (Exam Topic 3)

You are developing an ASP.NET Core Web API web service that uses Azure Application Insights to monitor performance and track events.

You need to enable logging and ensure that log messages can be correlated to events tracked by Application Insights.

How should you complete the code? To answer, drag the appropriate code segments to the correct locations. Each code segment may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Code segments

Answer Area

```

public class Startup
{
    . . .
    public void ConfigureServices (IServiceCollection services)
    {
        services.AddOptions<ApplicationInsightsLoggerOptions>().
        Configure(o => o.IncludeEventId = true );
        services.AddMvc();
    }
    public void Configure (IApplicationBuilder app,
        IHostingEnvironment env, ILoggerFactory loggerFactory)
    {
        loggerFactory.AddApplicationInsights(app.ApplicationServices, LogLevel.Trace);
        app.UseMvc();
    }
}

```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: ApplicationInsightsLoggerOptions

If you want to include the EventId and EventName properties, then add the following to the ConfigureServices method:
 services.AddOptions<ApplicationInsightsLoggerOptions>().Configure(o => o.IncludeEventId = true);

Box 2: IncludeEventID

Box 3: ApplicationServices

In Asp.Net core apps it turns out that trace logs do not show up in Application Insights out of the box. We need to add the following code snippet to our Configure method in Startup.cs:

loggerFactory.AddApplicationInsights(app.ApplicationServices, logLevel);

References:
<https://blog.computedcloud.com/enabling-application-insights-trace-logging-in-asp-net-core/>

NEW QUESTION 41

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You develop a software as a service (SaaS) offering to manage photographs. Users upload photos to a web service which then stores the photos in Azure Storage Blob storage. The storage account type is

General-purpose V2.

When photos are uploaded, they must be processed to produce and save a mobile-friendly version of the image. The process to produce a mobile-friendly version of the image must start in less than one minute.

You need to design the process that starts the photo processing.

Solution: Convert the Azure Storage account to a BlockBlobStorage storage account. Does the solution meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Not necessary to convert the account, instead move photo processing to an Azure Function triggered from the blob upload..

Azure Storage events allow applications to react to events. Common Blob storage event scenarios include image or video processing, search indexing, or any file-oriented workflow.

Note: Only storage accounts of kind StorageV2 (general purpose v2) and BlobStorage support event integration. Storage (general purpose v1) does not support integration with Event Grid.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/blobs/storage-blob-event-overview>

NEW QUESTION 46

- (Exam Topic 3)

You develop software solutions for a mobile delivery service. You are developing a mobile app that users can use to order from a restaurant in their area. The app uses the following workflow:

- * 1. A driver selects the restaurants for which they will deliver orders.
- * 2. Orders are sent to all available drivers in an area.
- * 3. Only orders for the selected restaurants will appear for the driver.
- * 4. The first driver to accept an order removes it from the list of available orders. You need to implement an Azure Service Bus solution.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Answer area
Create a Service Bus topic for each restaurant for which a driver can receive messages.	
Create a single Service Bus topic.	
Create a single Service Bus subscription.	
Create a single Service Bus Namespace.	
Create a Service Bus Namespace for each restaurant for which a driver can receive messages.	
Create a Service Bus subscription for each restaurant for which a driver can receive orders.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Create a single Service Bus Namespace

To begin using Service Bus messaging entities in Azure, you must first create a namespace with a name that is unique across Azure. A namespace provides a scoping container for addressing Service Bus resources within your application.

Box 2: Create a Service Bus Topic for each restaurant for which a driver can receive messages. Create topics.

Box 3: Create a Service Bus subscription for each restaurant for which a driver can receive orders. Topics can have multiple, independent subscriptions.

References:

<https://docs.microsoft.com/en-us/azure/service-bus-messaging/service-bus-messaging-overview>

NEW QUESTION 50

- (Exam Topic 3)

You are developing a web app that is protected by Azure Web Application Firewall (WAF). All traffic to the web app is routed through an Azure Application Gateway instance that is used by multiple web apps. The web app address is contoso.azurewebsites.net.

All traffic must be secured with SSL. The Azure Application Gateway instance is used by multiple web apps. You need to configure the Azure Application Gateway for the app.

Which two actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. In the Azure Application Gateway's HTTP setting, enable the Use for App service setting.
- B. Convert the web app to run in an Azure App service environment (ASE).
- C. Add an authentication certificate for contoso.azurewebsites.net to the Azure Application gateway.
- D. In the Azure Application Gateway's HTTP setting, set the value of the Override backend path option to contoso22.azurewebsites.net.

Answer: AD

Explanation:

D: The ability to specify a host override is defined in the HTTP settings and can be applied to any back-end pool during rule creation.

The ability to derive the host name from the IP or FQDN of the back-end pool members. HTTP settings also provide an option to dynamically pick the host name from a back-end pool member's FQDN if configured with the option to derive host name from an individual back-end pool member.

A (not C): SSL termination and end to end SSL with multi-tenant services.

In case of end to end SSL, trusted Azure services such as Azure App service web apps do not require whitelisting the backends in the application gateway.

Therefore, there is no need to add any authentication certificates.

Add HTTP setting □ ×

saiappgw-appgw

* Protocol

HTTP
HTTPS

Authentication certificates are not required for trusted Azure certificates for end to end ssl to work

* Port ?

 ✓

* Request timeout (seconds)

Override backend path ?

Use for App service

Use custom probe ?

OK

Reference:

<https://docs.microsoft.com/en-us/azure/application-gateway/application-gateway-web-app-overview>

NEW QUESTION 55

- (Exam Topic 3)

You provide an Azure API Management managed web service to clients. The back end web service implements HTTP Strict Transport Security (HSTS). Every request to the backend service must include a valid HTTP authorization header. You need to configure the Azure API Management instance with an authentication policy. Which two policies can you use? Each correct answer presents a complete solution. NOTE: Each correct selection is worth one point.

- A. Certificate Authentication
- B. Basic Authentication
- C. OAuth Client Credential Grant
- D. Digest Authentication

Answer: AC

NEW QUESTION 59

- (Exam Topic 3)

You are creating an app that uses Event Grid to connect with other services. Your app's event data will be sent to a serverless function that checks compliance. This function is maintained by your company.

You write a new event subscription at the scope of your resource. The event must be invalidated after 3 specific period of time. You need to configure Event Grid to ensure security.

What should you implement? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point

Authentication

Type

WebHook event delivery

▼

SAS tokens

Key authentication

JWT token

Topic publishing

▼

ValidationCode handshake

ValidationURL handshake

Management Access Control

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: SAS tokens

Custom topics use either Shared Access Signature (SAS) or key authentication. Microsoft recommends SAS, but key authentication provides simple programming, and is compatible with many existing webhook publishers.

In this case we need the expiration time provided by SAS tokens. Box 2: ValidationCode handshake

Event Grid supports two ways of validating the subscription: ValidationCode handshake (programmatic) and ValidationURL handshake (manual).

If you control the source code for your endpoint, this method is recommended.

NEW QUESTION 62

- (Exam Topic 3)

A company is implementing a publish-subscribe (Pub/Sub) messaging component by using Azure Service Bus. You are developing the first subscription application.

In the Azure portal you see that messages are being sent to the subscription for each topic. You create and initialize a subscription client object by supplying the correct details, but the subscription application is still not consuming the messages.

You need to complete the source code of the subscription client. What should you do?

- A. `await subscriptionClient.CloseAsync();`
- B. `await subscriptionClient.AddRuleAsync(new RuleDescription(RuleDescription.DefaultRuleName, new TrueFilter()));`
- C. `subscriptionClient.RegisterMessageHandler(ProcessMessagesAsync, messageHandlerOptions);`
- D. `subscriptionClient = new SubscriptionClient(ServiceBusConnectionString, TopicName, SubscriptionName);`

Answer: C

Explanation:

Using topic client, call RegisterMessageHandler which is used to receive messages continuously from the entity. It registers a message handler and begins a new thread to receive messages. This handler is waited on every time a new message is received by the receiver.

`subscriptionClient.RegisterMessageHandler(ReceiveMessagesAsync, messageHandlerOptions);` References:

<https://www.c-sharpcorner.com/article/azure-service-bus-topic-and-subscription-pub-sub/>

NEW QUESTION 67

- (Exam Topic 3)

Fourth Coffee has an ASP.NET Core web app that runs in Docker. The app is mapped to the `www.fourthcoffee.com` domain.

Fourth Coffee is migrating this application to Azure.

You need to provision an App Service Web App to host this docker image and map the custom domain to the App Service web app.

A resource group named `FourthCoffeePublicWebResourceGroup` has been created in the WestUS region that contains an App Service Plan named `AppServiceLinuxDockerPlan`.

Which order should the CLI commands be used to develop the solution? To answer, move all of the Azure CLI command from the list of commands to the answer area and arrange them in the correct order.

Azure CLI commands

Answer area

```
az webapp config hostname add
--webapp-name $appName
--resource-group fourthCoffeePublicWebResourceGroup\
--hostname $fqdn
```

```
#!/bin/bash
appName="FourthCoffeePublicWeb$random".
location "WestUS"
dockerHubContainerPath="FourthCoffee/publicweb:v1"
fqdn=http://www.fourthcoffee.com>www.fourthcoffee.com
```

```
az webapp create
--name $appName
--plan AppServiceLinuxDockerPlan
--resource-group fourthCoffeePublicWebResourceGroup
```

```
az webapp config container set
--docker-custom-image-name $dockerHibContainerPath
--name $appName
--resource-group fourthCoffeePublicWebResourceGroup
```



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: #bin/bash

The appName is used when the webapp-name is created in step 2. Step 2: az webapp config hostname add

The webapp-name is used when the webapp is created in step 3. Step 3: az webapp create

Create a web app. In the Cloud Shell, create a web app in the myAppServicePlan App Service plan with the az webapp create command.

Step : az webapp config container set

In Create a web app, you specified an image on Docker Hub in the az webapp create command. This is good enough for a public image. To use a private image, you need to configure your Docker account ID and password in your Azure web app.

In the Cloud Shell, follow the az webapp create command with az webapp config container set.

References:

<https://docs.microsoft.com/en-us/azure/app-service/containers/tutorial-custom-docker-image>

NEW QUESTION 68

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this question, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are developing a website that will run as an Azure Web App. Users will authenticate by using their Azure Active Directory (Azure AD) credentials.

You plan to assign users one of the following permission levels for the website: admin, normal, and reader. A user's Azure AD group membership must be used to determine the permission level. You need to configure authorization.

Solution:

- Create a new Azure AD application's manifest, set value of the groupMembershipClaims option to All.
- In the website, use the value of the groups claim from the JWT for the user to determine permissions. Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

To configure Manifest to include Group Claims in Auth Token

* 1. Go to Azure Active Directory to configure the Manifest. Click on Azure Active Directory, and go to App registrations to find your application:

* 2. Click on your application (or search for it if you have a lot of apps) and edit the Manifest by clicking on it.

* 3. Locate the "groupMembershipClaims" setting. Set its value to either "SecurityGroup" or "All". To help you decide which:

"SecurityGroup" - groups claim will contain the identifiers of all security groups of which the user is a member.

"All" - groups claim will contain the identifiers of all security groups and all distribution lists of which the user is a member

Now your application will include group claims in your manifest and you can use this fact in your code. References:

<https://blogs.msdn.microsoft.com/waws/2017/03/13/azure-app-service-authentication-aad-groups/>

NEW QUESTION 72

- (Exam Topic 3)

You develop a website. You plan to host the website in Azure. You expect the website to experience high traffic volumes after it is published. You must ensure that the website remains available and responsive while minimizing cost. You need to deploy the website. What should you do?

- A. Deploy the website to an App Service that uses the Shared service tie
- B. Configure the App Service plan to automatically scale when the CPU load is high.
- C. Deploy the website to a virtual machin
- D. Configure the virtual machine to automatically scale when the CPU load is high.
- E. Deploy the website to an App Service that uses the Standard service tie
- F. Configure the App Service plan to automatically scale when the CPU load is high.
- G. Deploy the website to a virtual machin
- H. Configure a Scale Set to increase the virtual machine instance count when the CPU load

Answer: C

Explanation:

Windows Azure Web Sites (WAWS) offers 3 modes: Standard, Free, and Shared.
 Standard mode carries an enterprise-grade SLA (Service Level Agreement) of 99.9% monthly, even for sites with just one instance.
 Standard mode runs on dedicated instances, making it different from the other ways to buy Windows Azure Web Sites.

NEW QUESTION 75

- (Exam Topic 3)

You develop an ASP.NET Core MVC application. You configure the application to track webpages and custom events. You need to identify trends in application usage.

Which Azure Application Insights Usage Analysis features should you use? To answer, drag the appropriate features to the correct requirements. Each feature may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Requirement

Feature

Which pages visited by users most often correlate to a product purchase?

How does load time of the product display page affect a user's decision to purchase a product?

Which events most influence a user's decision to continue to use the application?

Are there places in the application that users often perform repetitive actions?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box1: Users Box 2: Impact

One way to think of Impact is as the ultimate tool for settling arguments with someone on your team about how slowness in some aspect of your site is affecting whether users stick around. While users may tolerate a certain amount of slowness, Impact gives you insight into how best to balance optimization and performance to maximize user conversion.

Box 3: Retention

The retention feature in Azure Application Insights helps you analyze how many users return to your app, and how often they perform particular tasks or achieve goals. For example, if you run a game site, you could compare the numbers of users who return to the site after losing a game with the number who return after winning. This knowledge can help you improve both your user experience and your business strategy.

Box 4: User flows

The User Flows tool visualizes how users navigate between the pages and features of your site. It's great for answering questions like:

How do users navigate away from a page on your site? What do users click on a page on your site?

Where are the places that users churn most from your site?

Are there places where users repeat the same action over and over?

NEW QUESTION 77


- (Exam Topic 3)

You are configuring a development environment for your team. You deploy the latest Visual Studio image from the Azure Marketplace to your Azure subscription. The development environment requires several software development kits (SDKs) and third-party components to support application development across the organization. You install and customize the deployed virtual machine (VM) for your development team. The customized VM must be saved to allow provisioning of a new team member development environment.

You need to save the customized VM for future provisioning.

Which tools or services should you use? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

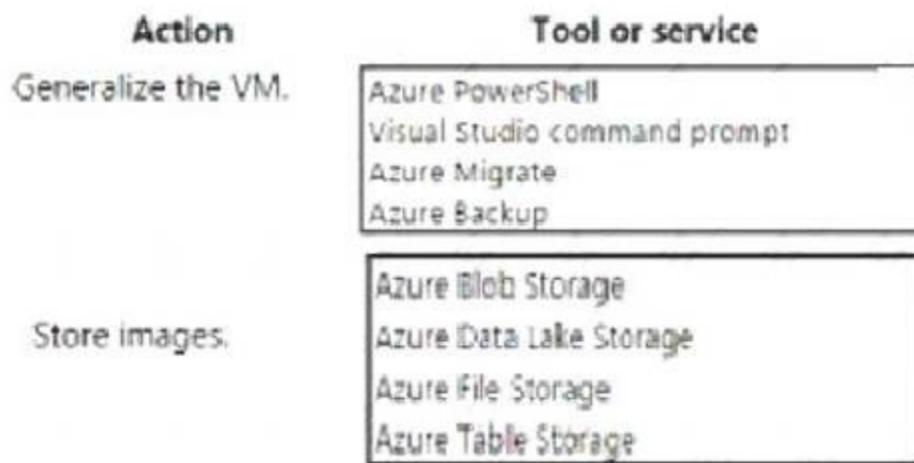

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Azure Powershell

Creating an image directly from the VM ensures that the image includes all of the disks associated with the VM, including the OS disk and any data disks. Before you begin, make sure that you have the latest version of the Azure PowerShell module. You use Sysprep to generalize the virtual machine, then use Azure PowerShell to create the image. Box 2: Azure Blob Storage

References:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/capture-image-resource#create-an-image-of-a>

NEW QUESTION 82

- (Exam Topic 3)

You have an application that provides weather forecasting data to external partners. You use Azure API Management to publish APIs.

You must change the behavior of the API to meet the following requirements:

- Support alternative input parameters.
- Remove formatting text from responses.
- Provide additional context to back-end services.

Which types of policies should you implement? To answer, drag the policy types to the correct scenarios. Each policy type may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content

NOTE: Each correct selection is worth one point.

Policy types	Requirement	Policy type
Inbound	Rewrite the request URL to match to the format expected by the web service.	policy type
Outbound	Remove formatting text from responses.	policy type
Backend	Forward the user ID that is associated with the subscription key for the original request to the back-end service.	policy type

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Policy types	Requirement	Policy type
Inbound	Rewrite the request URL to match to the format expected by the web service.	Outbound
Outbound	Remove formatting text from responses.	Inbound
Backend	Forward the user ID that is associated with the subscription key for the original request to the back-end service.	Backend

NEW QUESTION 84

- (Exam Topic 3)

You are developing a software solution for an autonomous transportation system. The solution uses large data sets and Azure Batch processing to simulate navigation sets for entire fleets of vehicles.

You need to create compute nodes for the solution on Azure Batch. What should you do?

- A. In Python, implement the class: TaskAddParameter
- B. In Python, implement the class: JobAddParameter
- C. In the Azure portal, create a Batch account
- D. In a .NET method, call the method: BatchClient.PoolOperations.CreateJob

Answer: D

Explanation:

A Batch job is a logical grouping of one or more tasks. A job includes settings common to the tasks, such as priority and the pool to run tasks on. The app uses the BatchClient.JobOperations.CreateJob method to create a job on your pool.

Note:

Step 1: Create a pool of compute nodes. When you create a pool, you specify the number of compute nodes for the pool, their size, and the operating system. When each task in your job runs, it's assigned to execute on one of the nodes in your pool.

Step 2 : Create a job. A job manages a collection of tasks. You associate each job to a specific pool where that job's tasks will run.

Step 3: Add tasks to the job. Each task runs the application or script that you uploaded to process the data files it downloads from your Storage account. As each task completes, it can upload its output to Azure Storage.

NEW QUESTION 85

- (Exam Topic 3)

You are developing a Docker/Go using Azure App Service Web App for Containers. You plan to run the container in an App Service on Linux. You identify a Docker container image to use.

None of your current resource groups reside in a location that supports Linux. You must minimize the number of resource groups required.

You need to create the application and perform an initial deployment.

Which three Azure CLI commands should you use to develop the solution? To answer, move the appropriate commands from the list of commands to the answer area and arrange them in the correct order.

Azure CLI Commands	Answer Area
az group create	
az group update	
az webapp update	
az webapp create	
az appservice plan create	

⬅
⬆

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

You can host native Linux applications in the cloud by using Azure Web Apps. To create a Web App for Containers, you must run Azure CLI commands that create a group, then a service plan, and finally the web app itself.

Step 1: az group create

In the Cloud Shell, create a resource group with the az group create command. Step 2: az appservice plan create

In the Cloud Shell, create an App Service plan in the resource group with the az appservice plan create command.

Step 3: az webapp create

In the Cloud Shell, create a web app in the myAppServicePlan App Service plan with the az webapp create command. Don't forget to replace with a unique app name, and <docker-ID> with your Docker ID.

References:

<https://docs.microsoft.com/mt-mt/azure/app-service/containers/quickstart-docker-go?view=sql-server-ver15>

NEW QUESTION 88

- (Exam Topic 3)

A company runs an international travel and bookings management service. The company plans to begin offering restaurant bookings. You must develop a solution that uses Azure Search and meets the following requirements:

- Users must be able to search for restaurants by name, description, location, and cuisine.
- Users must be able to narrow the results further by location, cuisine, rating, and family-friendliness.
- All words in descriptions must be included in searches. You need to add annotations to the restaurant class.

How should you complete the code segment? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

```
[SerializePropertyNameAsCamelCase]
public class Restaurant
{
    [Key, IsFilterable]
    public int RestaurantId { get; set; }
    [IsSearchable, IsFilterable, IsSortable]
    public string Name { get; set; }
    [IsSearchable.IsFilterable.IsSortable, IsFacetable]
    [IsFilterable.IsFacetable, Required]
    [IsSearchable]
    [IsSearchable, Required]
    public string location { get; set; }
    public string Phone { get; set; }
    [Required]
    [IsSearchable]
    [IsFilterable, IsFacetable, Required]
    [IsFilterable, IsFacetable, IsSortable]
    public string Description { get; set; }
    [IsFilterable, IsSortable, IsSearchable]
    [IsFilterable, IsSortable, IsFacetable]
    [IsFilterable, IsSortable, Key]
    [IsFilterable, IsSortable, IsSearchable, Required]
    public double Rating { get; set; }
    [IsSearchable, IsFilterable, IsFacetable]
    [IsFilterable, IsSortable, Key]
    [IsFilterable, IsSortable, IsSearchable]
    [IsFilterable, IsSortable, Key, Required]
    public List<string> Cuisines { get; set; }
    [IsFilterable, IsSortable, Key, Required]
    [IsSearchable, IsSortable, IsFacetable]
    [IsFilterable, IsSortable, Key, IsSearchable]
    [IsFilterable, IsFacetable]
    public bool FamilyFriendly { get; set; }
}
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: [IsSearchable.IsFilterable.IsSortable,IsFacetable] Location

Users must be able to search for restaurants by name, description, location, and cuisine.

Users must be able to narrow the results further by location, cuisine, rating, and family-friendliness. Box 2: [IsSearchable.IsFilterable.IsSortable,Required]

Description

Users must be able to search for restaurants by name, description, location, and cuisine. All words in descriptions must be included in searches.

Box 3: [IsFilterable,IsSortable,IsFaceTable] Rating

Users must be able to narrow the results further by location, cuisine, rating, and family-friendliness. Box 4: [IsSearchable.IsFilterable,IsFacetable]

Cuisines

Users must be able to search for restaurants by name, description, location, and cuisine.

Users must be able to narrow the results further by location, cuisine, rating, and family-friendliness. Box 5: [IsFilterable,IsFacetable]

FamilyFriendly

Users must be able to narrow the results further by location, cuisine, rating, and family-friendliness. References:

<https://www.henkboelman.com/azure-search-the-basics/>

NEW QUESTION 91

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

Margie's Travel is an international travel and bookings management service. The company is expanding into restaurant bookings. You are tasked with implementing Azure Search for the restaurants listed in their solution You create the index in Azure Search.

You need to import the restaurant data into the Azure Search service by using the Azure Search NET SDK. Solution:

- * 1 Create a SearchIndexClient object to connect to the search index
- * 2. Create an IndexBatch that contains the documents which must be added.
- * 3. Call the Documents.Index method of the SearchIndexClient and pass the IndexBatch..

Does the solution meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

* 1. The index needs to be populated. To do this, we will need a SearchIndexClient. There are two ways to obtain one: by constructing it, or by calling Indexes.GetClient on the SearchServiceClient. Here we will use the first method.

* 2. Create the indexBatch with the documents Something like:

```
var hotels = new Hotel[];
{
new Hotel()
{
HotelId = "3",
BaseRate = 129.99,
Description = "Close to town hall and the river"
}
};
...
```

```
var batch = IndexBatch.Upload(hotels);
```

* 3. The next step is to populate the newly-created index Example:

```
var batch = IndexBatch.Upload(hotels); try
{
indexClient.Documents.Index(batch);
}
}
```

References:

<https://docs.microsoft.com/en-us/azure/search/search-howto-dotnet-sdk>

NEW QUESTION 96

- (Exam Topic 3)

You develop Azure solutions.

You must connect to a No-SQL globally-distributed database by using the .NET API. You need to create an object to configure and execute requests in the database. Which code segment should you use?

- A. new Container(EndpointUri, PrimaryKey);
- B. new Database(Endpoint, PrimaryKey);
- C. new CosmosClient(EndpointUri, PrimaryKey);

Answer: C

Explanation:

Example:

```
// Create a new instance of the Cosmos Client
this.cosmosClient = new CosmosClient(EndpointUri, PrimaryKey)
//ADD THIS PART TO YOUR CODE
await this.CreateDatabaseAsync(); Reference:
https://docs.microsoft.com/en-us/azure/cosmos-db/sql-api-get-started
```

NEW QUESTION 99

- (Exam Topic 3)

You are developing an internal website for employees to view sensitive data. The website uses Azure Active Directory (AAD) for authentication. You need to implement multifactor authentication for the website.

What should you do? Each correct answer presents part of the solution. NOTE; Each correct selection is worth one point.

- A. In Azure AD, create a new conditional access policy.
- B. In Azure AD, enable application proxy.
- C. Configure the website to use Azure AD B2C.
- D. In Azure AD conditional access, enable the baseline policy.
- E. Upgrade to Azure AD Premium.

Answer: AE

Explanation:

References:

<https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-getstarted>

NEW QUESTION 100

.....

Relate Links

100% Pass Your AZ-204 Exam with ExamBible Prep Materials

<https://www.exambible.com/AZ-204-exam/>

Contact us

We are proud of our high-quality customer service, which serves you around the clock 24/7.

Viste - <https://www.exambible.com/>