



Fortinet

Exam Questions NSE4_FGT-7.2

Fortinet NSE 4 - FortiOS 7.2

NEW QUESTION 1

Which two protocols are used to enable administrator access of a FortiGate device? (Choose two.)

- A. FTM
- B. SSH
- C. HTTPS
- D. FortiTelemetry

Answer: BC

NEW QUESTION 2

Which three methods are used by the collector agent for AD polling? (Choose three.)

- A. FortiGate polling
- B. NetAPI
- C. Novell API
- D. WMI
- E. WinSecLog

Answer: BDE

NEW QUESTION 3

What are two functions of ZTNA? (Choose two.)

- A. ZTNA manages access through the client only.
- B. ZTNA manages access for remote users only.
- C. ZTNA provides a security posture check.
- D. ZTNA provides role-based access.

Answer: CD

NEW QUESTION 4

A network administrator is configuring a new IPsec VPN tunnel on FortiGate. The remote peer IP address is dynamic. In addition, the remote peer does not support a dynamic DNS update service.

Which type of remote gateway should the administrator configure on FortiGate for the new IPsec VPN tunnel to work?

- A. Pre-shared key
- B. Dialup user
- C. Dynamic DNS
- D. Static IP address

Answer: D

NEW QUESTION 5

What are two benefits of flow-based inspection compared to proxy-based inspection? (Choose two.)

- A. FortiGate uses fewer resources.
- B. FortiGate performs a more exhaustive inspection on traffic.
- C. FortiGate adds less latency to traffic.
- D. FortiGate allocates two sessions per connection.

Answer: AC

NEW QUESTION 6

A network administrator wants to set up redundant IPsec VPN tunnels on FortiGate by using two IPsec VPN tunnels and static routes.

All traffic must be routed through the primary tunnel when both tunnels are up. The secondary tunnel must be used only if the primary tunnel goes down. In addition, FortiGate should be able to detect a dead tunnel to speed up tunnel failover.

Which two key configuration changes must the administrator make on FortiGate to meet the requirements? (Choose two.)

- A. Configure a higher distance on the static route for the primary tunnel, and a lower distance on the static route for the secondary tunnel.
- B. Configure a lower distance on the static route for the primary tunnel, and a higher distance on the static route for the secondary tunnel.
- C. Enable Auto-negotiate and Autokey Keep Alive on the phase 2 configuration of both tunnels.
- D. Enable Dead Peer Detection.


Answer: AD

NEW QUESTION 7

Refer to the exhibit.

The exhibit shows a diagram of a FortiGate device connected to the network, the firewall policy and VIP configuration on the FortiGate device, and the routing table on the ISP router.

When the administrator tries to access the web server public address (203.0.113.2) from the internet, the connection times out. At the same time, the administrator runs a sniffer on FortiGate to capture incoming web traffic to the server and does not see any output.

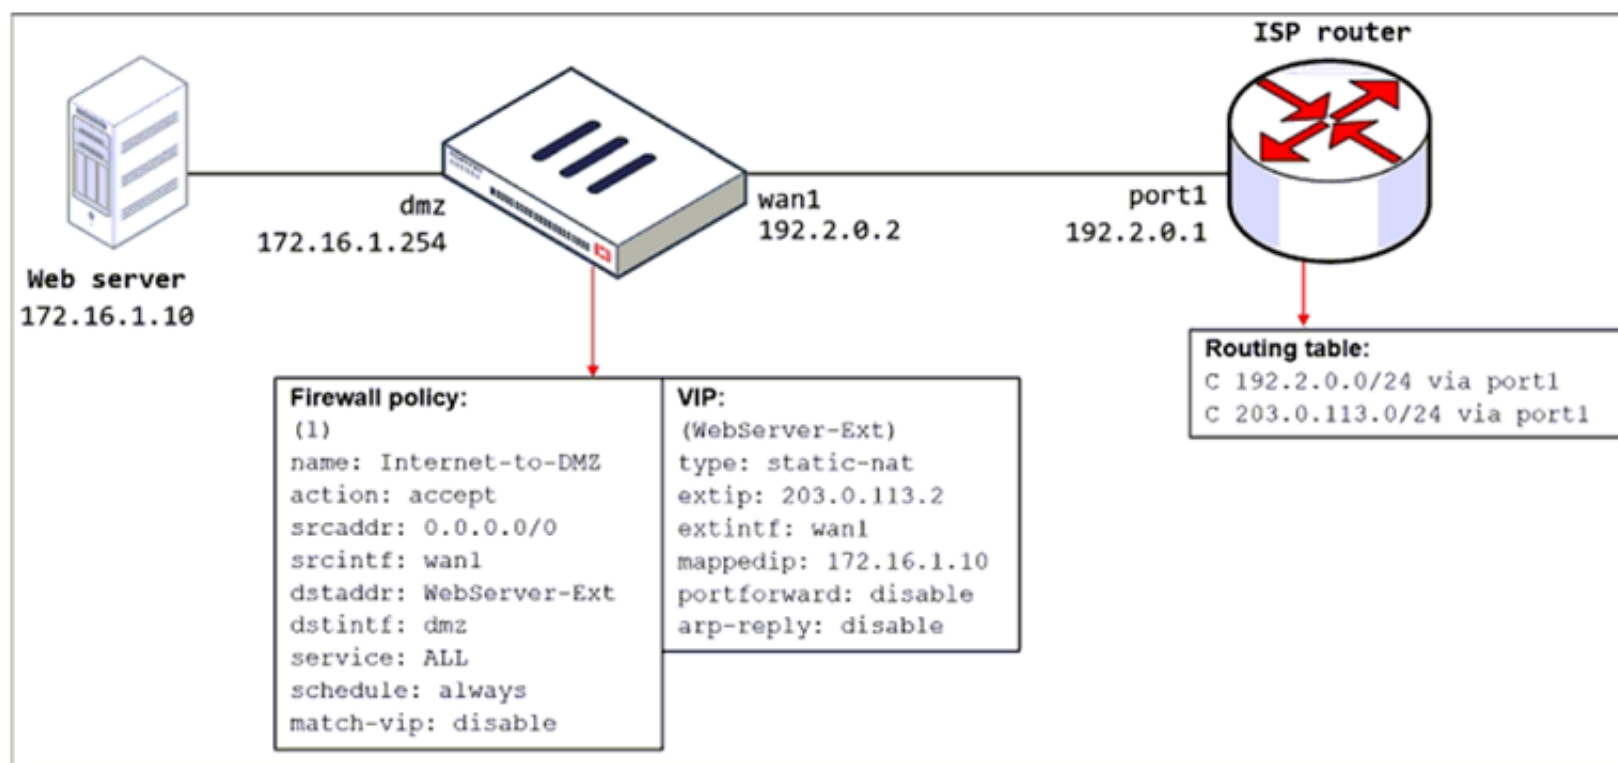

Based on the information shown in the exhibit, what configuration change must the administrator make to fix the connectivity issue?

- A. Configure a loopback interface with address 203.0.113.2/32.
- B. In the VIP configuration, enable arp-reply.
- C. Enable port forwarding on the server to map the external service port to the internal service port.
- D. In the firewall policy configuration, enable match-vip.

Answer: D

NEW QUESTION 8

Refer to the exhibits.

The exhibits contain a network diagram, and virtual IP, IP pool, and firewall policies configuration information.

The WAN (port1) interface has the IP address 10.200.1.1/24.

The LAN (port3) interface has the IP address 10.0.1.254/24.

The first firewall policy has NAT enabled using IP pool.

The second firewall policy is configured with a VIP as the destination address.

Exhibit A Exhibit B

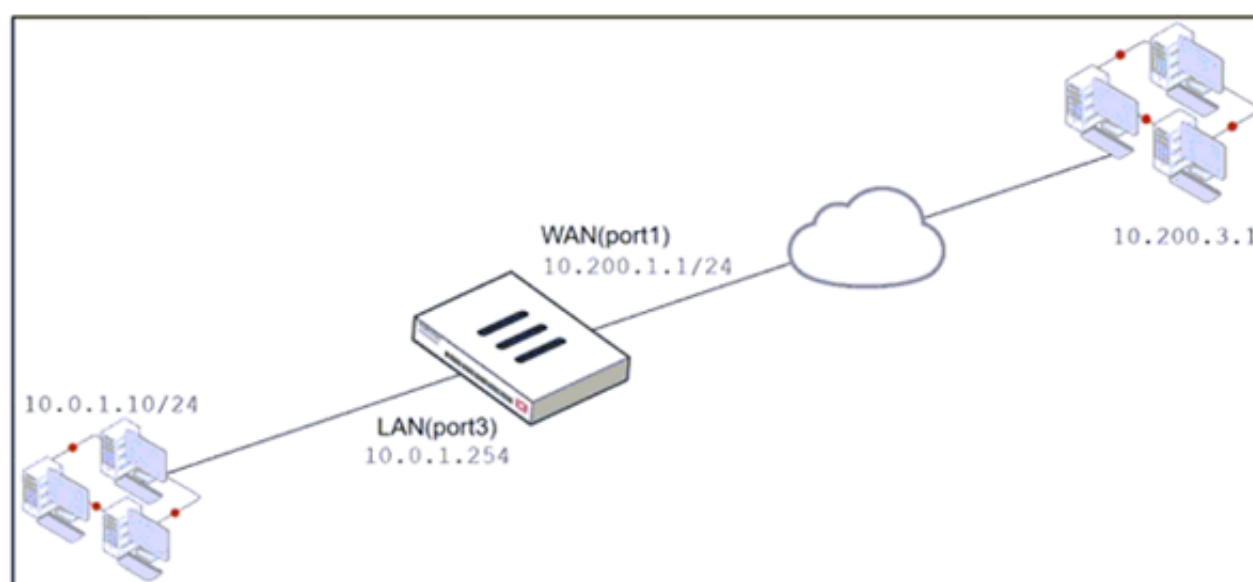


Exhibit AExhibit B

Name	From	To	Source	Destination	Schedule	Service	Action	NAT
Full_Access	LAN (port3)	WAN (port1)	all	all	always	ALL	ACCEPT	IP Pool
WebServer	WAN (port1)	LAN (port3)	all	VIP	always	ALL	ACCEPT	Disabled

0/255

Write a comment...

Change

port1

Static NAT

10.200.1.10

10.0.1.10

Optional Filters

Port Forwarding

TCPUDP SCTP ICMP

One to oneMany to many

443

443

IP Pool

0/255

OverloadOne-to-OneFixed Port RangePort Block Allocation

10.200.1.100-10.200.1.100

NAT64

ARP Reply

Which IP address will be used to source NAT (SNAT) the internet traffic coming from a workstation with the IP address 10.0.1.10?

- A. 10.200.1.1
- B. 10.0.1.254
- C. 10.200.1.10
- D. 10.200.1.100

Answer: D

NEW QUESTION 9

Which statement correctly describes the use of reliable logging on FortiGate?

- A. Reliable logging is enabled by default in all configuration scenarios.
- B. Reliable logging is required to encrypt the transmission of logs.
- C. Reliable logging can be configured only using the CLI.
- D. Reliable logging prevents the loss of logs when the local disk is full.

Answer: D

NEW QUESTION 10

Which two settings are required for SSL VPN to function between two FortiGate devices? (Choose two.)

- A. The client FortiGate requires a manually added route to remote subnets.
- B. The client FortiGate requires a client certificate signed by the CA on the server FortiGate.
- C. The server FortiGate requires a CA certificate to verify the client FortiGate certificate.
- D. The client FortiGate requires the SSL VPN tunnel interface type to connect SSL VPN.

Answer: BC

NEW QUESTION 10

Refer to the exhibit showing a debug flow output.

```
id=20085 trace_id=1 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1, 10.0.1.10:19938->10.0.1.250:2048) from port1. type=8, code=0, id=19938, seq=1."
id=20085 trace_id=1 func=init_ip_session_common line=5760 msg="allocate a new session-00003dd5"
id=20085 trace_id=1 func=vf_ip_route_input_common line=2598 msg="find a route: flag=84000000 gw=10.0.1.250 via root"
id=20085 trace_id=2 func=print_pkt_detail line=5594 msg="vd-root:0 received a packet(proto=1, 10.0.1.250:19938->10.0.1.10:0) from local. type=0, code=0, id=19938, seq=1."
id=20085 trace_id=2 func=resolve_ip_tuple_fast line=5675 msg="Find an existing session, id=00003dd5, reply direction"
```

What two conclusions can you make from the debug flow output? (Choose two.)

- A. The debug flow is for ICMP traffic.
- B. The default route is required to receive a reply.
- C. Anew traffic session was created.
- D. A firewall policy allowed the connection.

Answer: AC

NEW QUESTION 12

An administrator has configured the following settings:

config system settings

set ses-denied-traffic enable

end

config system global

set block-session-timer 30

end

What are the two results of this configuration? (Choose two.)

- A. Device detection on all interfaces is enforced for 30 minutes.
- B. Denied users are blocked for 30 minutes.
- C. The number of logs generated by denied traffic is reduced.
- D. A session for denied traffic is created.

Answer: AC

NEW QUESTION 17

Which two statements are correct about NGFW Policy-based mode? (Choose two.)

- A. NGFW policy-based mode does not require the use of central source NAT policy
- B. NGFW policy-based mode can only be applied globally and not on individual VDOMs
- C. NGFW policy-based mode supports creating applications and web filtering categories directly in afirewall policy
- D. NGFW policy-based mode policies support only flow inspection

Answer: CD

NEW QUESTION 20

Refer to the exhibits.

The exhibits show the firewall policies and the objects used in the firewall policies.

The administrator is using the Policy Lookup feature and has entered the search criteria shown in the exhibit.

Exhibit A

Exhibit B

Address Object

Name	Details
IP Range/Subnet	
LOCAL_CLIENT	10.0.1.10/32
all	0.0.0.0
FQDN	
facebook.com	facebook.com

Internet Service Object

Name	Direction	Number of Entries
Predefined Internet Services		
Facebook-Web	Destination	26.578
IP	Port	Protocol
1.9.91.17 - 1.9.91.18	80	TCP
	443	
	8443	
1.9.91.17 - 1.9.91.18	443	UDP
1.9.91.30	443	UDP

Firewall Policies

ID	From	To	Source	Destination	Schedule	Service	Action	NAT
3	port3	port1	LOCAL_CLIENT	facebook.com	always	ULL_UDP	ACCEPT	Enabled
1	port1	port3	facebook.com	LOCAL_CLIENT	always	ULL_UDP	ACCEPT	Enabled
4	port4	port1	LOCAL_CLIENT	all	always	HTTP DNS HTTPS	ACCEPT	Enabled
5	port3	port1	LOCAL_CLIENT	Facebook-Web	always	Internet Service	ACCEPT	Enabled
2	port3	port1	all	all	always	ALL	ACCEPT	Enabled

Exhibit A Exhibit B

Policy Lookup

Incoming Interface	port3
IP Version	IPv4
Protocol	TCP
Source	10.0.1.10
Source Port	Optional (1-65535)
Destination	facebook.com
Destination Port	443

Search

Close

Which policy will be highlighted, based on the input criteria?


- A. Policy with ID 4.
- B. Policy with ID 5.
- C. Policies with ID 2 and 3.
- D. Policy with ID 4.

Answer: A

NEW QUESTION 22

Refer to the exhibit.

Network Diagram

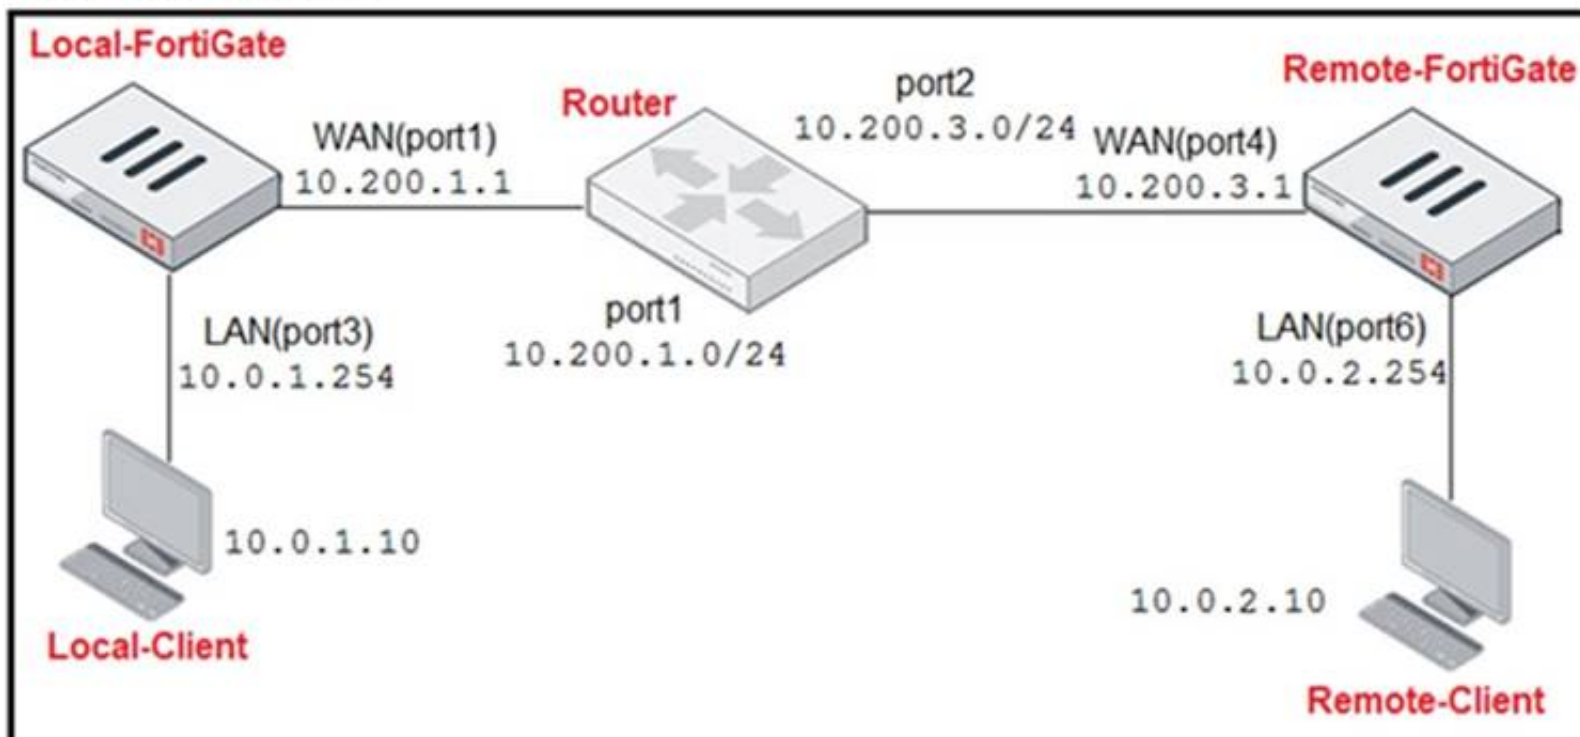

Central SNAT Policies Local-FortiGate

ID	From	To	Source Address	Protocol Number	Destination Address	Translated Address
2	LAN(port3)	WAN(port1)	all	6	REMOTE_FORTIGATE	SNAT-Pool
1	LAN(port3)	WAN(port1)	all	1	all	SNAT-Remote1
3	LAN(port3)	WAN(port1)	all	2	all	SNAT-Remote

IP Pool Local-FortiGate

+ Create New	Edit	Clone	Delete	Search <input type="text"/>	Q
Name	External IP Range	Type	ARP Reply		
SNAT-Pool	10.200.1.49-10.200.1.49	Overload	Enabled		
SNAT-Remote	10.200.1.149-10.200.1.149	Overload	Enabled		
SNAT-Remote1	10.200.1.99-10.200.1.99	Overload	Enabled		

Protocol Number Table

Protocol Number Table	
Protocol	Protocol Number
TCP	6
ICMP	1
IGMP	2

The exhibit contains a network diagram, central SNAT policy, and IP pool configuration. The WAN (port1) interface has the IP address 10.200. 1. 1/24. The LAN (port3) interface has the IP address 10.0. 1.254/24. A firewall policy is configured to allow to destinations from LAN (port3) to WAN (port1). Central NAT is enabled, so NAT settings from matching Central SNAT policies will be applied. Which IP address will be used to source NAT the traffic, if the user on Local-Client (10.0. 1. 10) pings the IP address of Remote-FortiGate (10.200.3. 1)?

- A. 10.200. 1. 149
- B. 10.200. 1. 1
- C. 10.200. 1.49
- D. 10.200. 1.99

Answer: D

NEW QUESTION 25

Which of the following statements is true regarding SSL VPN settings for an SSL VPN portal?

- A. By default, FortiGate uses WINS servers to resolve names.
- B. By default, the SSL VPN portal requires the installation of a client's certificate.
- C. By default, split tunneling is enabled.
- D. By default, the admin GUI and SSL VPN portal use the same HTTPS port.

Answer: D

NEW QUESTION 29

Which three statements are true regarding session-based authentication? (Choose three.)

- A. HTTP sessions are treated as a single user.
- B. IP sessions from the same source IP address are treated as a single user.
- C. It can differentiate among multiple clients behind the same source IP address.
- D. It requires more resources.
- E. It is not recommended if multiple users are behind the source NAT

Answer: ACD

NEW QUESTION 31

Refer to the web filter raw logs.

```
date=2020-07-09 time=12:51:51 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313511250173744 tz="-0400" policyid=1
sessionid=5526 srcip=10.0.1.10 srcport=48660 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web" action="blocked"
reqtype="direct" url="https://twitter.com/" sentbyte=517
rcvdbyte=0 direction="outgoing" msg="URL belongs to a category
with warnings enabled" method="domain" cat=37 catdesc="Social
Networking"

date=2020-07-09 time=12:52:16 logid="0316013057" type="utm"
subtype="webfilter" eventtype="ftgd_blk" level="warning"
vd="root" eventtime=1594313537024536428 tz="-0400" policyid=1
sessionid=5552 srcip=10.0.1.10 srcport=48698 srcintf="port2"
srcintfrole="undefined" dstip=104.244.42.193 dstport=443
dstintf="port1" dstintfrole="undefined" proto=6 service="HTTPS"
hostname="twitter.com" profile="all_users_web"
action="passthrough" reqtype="direct" url="https://twitter.com/"
sentbyte=369 rcvdbyte=0 direction="outgoing" msg="URL belongs to
a category with warnings enabled" method="domain" cat=37
catdesc="Social Networking"
```

Based on the raw logs shown in the exhibit, which statement is correct?

- A. Social networking web filter category is configured with the action set to authenticate.
- B. The action on firewall policy ID 1 is set to warning.
- C. Access to the social networking web filter category was explicitly blocked to all users.
- D. The name of the firewall policy is all_users_web.

Answer: A

NEW QUESTION 34

Which three criteria can a FortiGate use to look for a matching firewall policy to process traffic? (Choose three.)

- A. Source defined as Internet Services in the firewall policy.
- B. Destination defined as Internet Services in the firewall policy.
- C. Highest to lowest priority defined in the firewall policy.
- D. Services defined in the firewall policy.
- E. Lowest to highest policy ID number.

Answer: ABD

Explanation:

When a packet arrives, how does FortiGate find a matching policy? Each policy has match criteria, which you can define using the following objects:

- Incoming Interface
- Outgoing Interface
- Source: IP address, user, internet services
- Destination: IP address or internet services
- Service: IP protocol and port number
- Schedule: Applies during configured times

NEW QUESTION 35

A FortiGate is operating in NAT mode and configured with two virtual LAN (VLAN) sub interfaces added to the physical interface. Which statements about the VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in different subnets.

- A. The two VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in different subnets.
- B. The two VLAN sub interfaces must have different VLAN IDs.
- C. The two VLAN sub interfaces can have the same VLAN ID, only if they belong to different VDOMs.
- D. The two VLAN sub interfaces can have the same VLAN ID, only if they have IP addresses in the same subnet.

Answer: B

Explanation:

FortiGate_Infrastructure_6.0_Study_Guide_v2-Online.pdf > page 147

"Multiple VLANs can coexist in the same physical interface, provide they have different VLAN ID"

NEW QUESTION 36

Which two statements explain antivirus scanning modes? (Choose two.)

- A. In proxy-based inspection mode, files bigger than the buffer size are scanned.
- B. In flow-based inspection mode, FortiGate buffers the file, but also simultaneously transmits it to the client.
- C. In proxy-based inspection mode, antivirus scanning buffers the whole file for scanning, before sending it to the client.
- D. In flow-based inspection mode, files bigger than the buffer size are scanned.

Answer: BC

Explanation:

An antivirus profile in full scan mode buffers up to your specified file size limit. The default is 10 MB. That is large enough for most files, except video files. If your FortiGate model has more RAM, you may be able to increase this threshold. Without a limit, very large files could exhaust the scan memory. So, this threshold balances risk and performance. Is this tradeoff unique to FortiGate, or to a specific model? No. Regardless of vendor or model, you must make a choice. This is because of the difference between scans in theory, that have no limits, and scans on real-world devices, that have finite RAM. In order to detect 100% of malware regardless of file size, a firewall would need infinitely large RAM--something that no device has in the real world. Most viruses are very small. This table shows a typical tradeoff. You can see that with the default 10 MB threshold, only 0.01% of viruses pass through.

NEW QUESTION 39

Which three authentication timeout types are availability for selection on FortiGate? (Choose three.)

- A. hard-timeout
- B. auth-on-demand
- C. soft-timeout
- D. new-session
- E. Idle-timeout

Answer: ADE

Explanation:

<https://kb.fortinet.com/kb/documentLink.do?externalID=FD37221>

NEW QUESTION 44

Refer to the exhibit, which contains a session diagnostic output.

```
session info: proto=17 proto_state=01 duration=254 expire=179 timeout=0 flags=00000000 socktype=0 sockport=0 av_idx=0 use=3
origin-shaper=
reply-shaper=
per_ip_shaper=
class_id=0 ha_id=0 policy_dir=0 tunnel=/ helper=dns-udp vlan_cos=0/255
state=log may_dirty f00 log-start
statistic(bytes/packets/allow_err): org=1420/22/1 reply=5678/22/1 tuples=2
tx speed(Bps/kbps): 5/0 rx speed(Bps/kbps): 22/0
origin->sink: org pre->post, reply pre->post dev=5->3/3->5 gwy=10.200.1.254/10.0.1.200
hook=post dir=org act=snat 10.0.1.200:2486->208.91.112.53:53(10.200.1.1:62902)
hook=pre dir=reply act=dnat 208.91.112.53:53->10.200.1.1:62902(10.0.1.200:2486)
misc=0 policy_id=3 auth_info=0 chk_client_info=0 vd=0
serial=0001fc1e tos=ff/ff app_list=0 app=0 url_cat=0
rpd_b_link_id= 00000000 rpd_b_svc_id=0 ngfwid=n/a
npu_state=0x040000
```

Which statement is true about the session diagnostic output?

- A. The session is a UDP unidirectional state.
- B. The session is in TCP ESTABLISHED state.
- C. The session is a bidirectional UDP connection.
- D. The session is a bidirectional TCP connection.

Answer: C

Explanation:

<https://kb.fortinet.com/kb/viewContent.do?externalId=FD30042>

NEW QUESTION 46

Refer to the exhibits to view the firewall policy (Exhibit A) and the antivirus profile (Exhibit B).

Edit Policy

Inspection Mode

Flow-based
Proxy-based

Firewall / Network Options

NAT
☒

IP Pool Configuration

Use Outgoing Interface Address
Use Dynamic IP Pool

Preserve Source Port
☐

Protocol Options

PRX default

Security Profiles

AntiVirus
☒

AV default

Web Filter
☐

DNS Filter
☐

Application Control
☐

IPS
☐

SSL Inspection
☒

SSL deep-inspection

Decrypted Traffic Mirror
☐

Edit AntiVirus Profile

Name

default

Comments

Scan files and block viruses.
29/255

Detect Viruses

Block
Monitor

Feature set

Flow-based
Proxy-based

Inspected Protocols

HTTP
☒

SMTP
☒

POP3
☒

IMAP
☒

FTP
☒

CIFS
☐

APT Protection Options

Treat Windows Executables in Email Attachments as Viruses
☒

Include Mobile Malware Protection
☒

Virus Outbreak Prevention

Use FortiGuard Outbreak Prevention Database
☐

Use External Malware Block List
☐

Which statement is correct if a user is unable to receive a block replacement message when downloading an infected file for the first time?

- A. The firewall policy performs the full content inspection on the file.
- B. The flow-based inspection is used, which resets the last packet to the user.
- C. The volume of traffic being inspected is too high for this model of FortiGate.
- D. The intrusion prevention security profile needs to be enabled when using flow-based inspection mode.

Answer: B

Explanation:

- "ONLY" If the virus is detected at the "START" of the connection, the IPS engine sends the block replacement message immediately
 - When a virus is detected on a TCP session (FIRST TIME), but where "SOME PACKETS" have been already forwarded to the receiver, FortiGate "resets the connection" and does not send the last piece of the file. Although the receiver got most of the file content, the file has been truncated and therefore, can't be opened. The IPS engine also caches the URL of the infected file, so that if a "SECOND ATTEMPT" to transmit the file is made, the IPS engine will then send a block replacement message to the client instead of scanning the file again.
- In flow mode, the FortiGate drops the last packet killing the file. But because of that the block replacement message cannot be displayed. If the file is attempted to download again the block message will be shown.

NEW QUESTION 48

Refer to the exhibits.

The exhibits show a network diagram and firewall configurations.

An administrator created a Deny policy with default settings to deny Webserver access for Remote-User2. Remote-User1 must be able to access the Webserver. Remote-User2 must not be able to access the Webserver.

Exhibit A Exhibit B

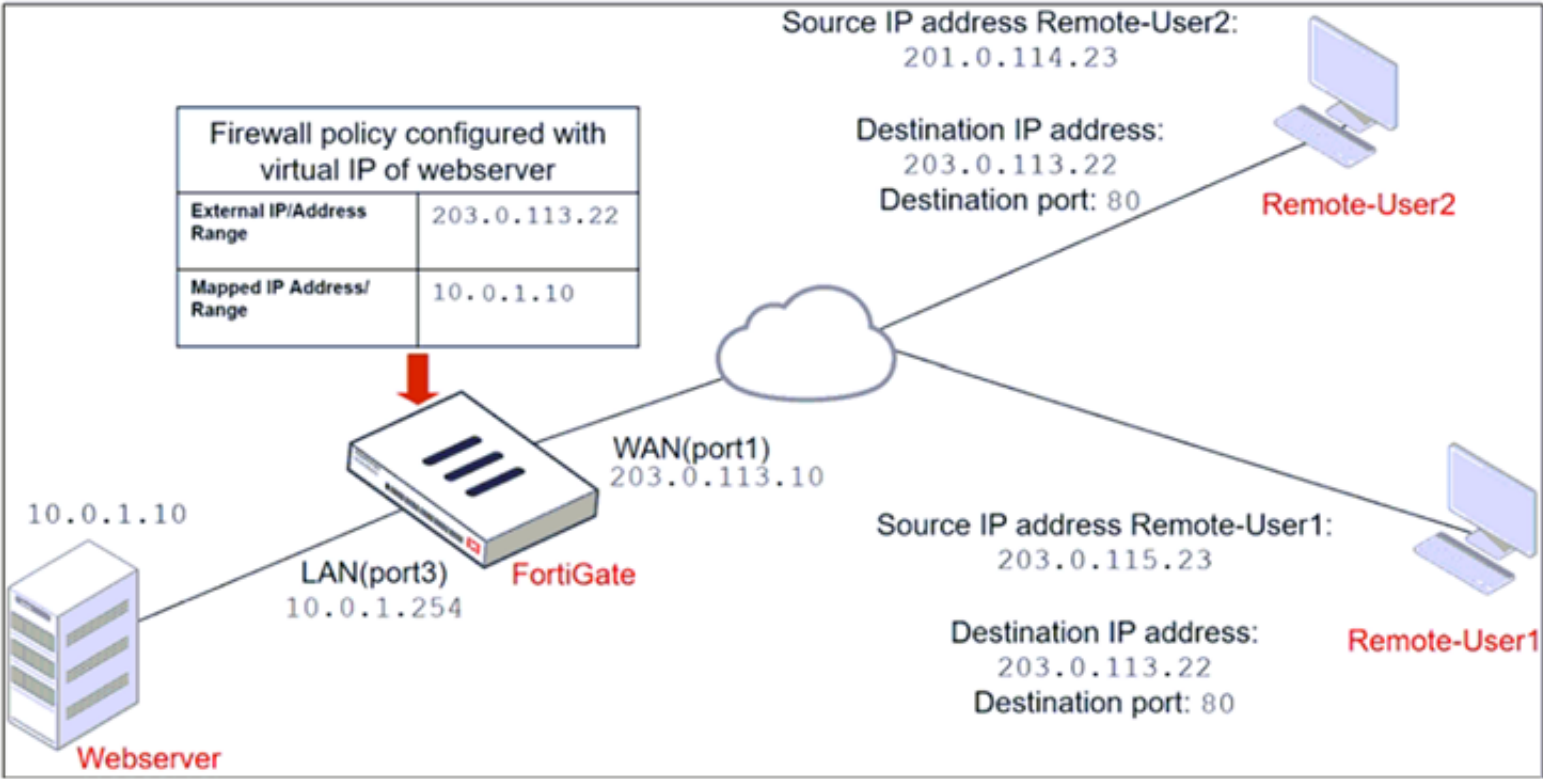


Exhibit A Exhibit B

Edit Address

Name	Deny_IP
Color	Change
Type	Subnet
IP/Netmask	201.0.114.23/32
Interface	WAN (port1)
Static route configuration	<input type="checkbox"/>
Comments	Deny web server access. 23/255

Firewall address object

Firewall policies

ID	Name	Source	Destination	Schedule	Service	Action
WAN (port1) → LAN (port3) 2						
4	Deny	Deny_IP	all	always	ALL	DENY
3	Allow_access	all	Webserver	always	ALL	ACCEPT

In this scenario, which two changes can the administrator make to deny Webserver access for Remote-User2? (Choose two.)

- A. Disable match-vip in the Deny policy.
- B. Set the Destination address as Deny_IP in the Allow-access policy.
- C. Enable match vip in the Deny policy.
- D. Set the Destination address as Web_server in the Deny policy.

Answer: CD

Explanation:

<https://community.fortinet.com/t5/FortiGate/Technical-Tip-Firewall-does-not-block-incoming-WAN-to-LAN/ta>

NEW QUESTION 51

An administrator has configured a strict RPF check on FortiGate. Which statement is true about the strict RPF check?

- A. The strict RPF check is run on the first sent and reply packet of any new session.
- B. Strict RPF checks the best route back to the source using the incoming interface.
- C. Strict RPF checks only for the existence of at least one active route back to the source using the incoming interface.
- D. Strict RPF allows packets back to sources with all active routes.

Answer: C

NEW QUESTION 55

An administrator is configuring an Ipsec between site A and siteB. The Remotes Gateway setting in both sites has been configured as Static IP Address. For site A, the local quick mode selector is 192.168. 1.0/24 and the remote quick mode selector is 192.168.2.0/24. Which subnet must the administrator configure for the local quick mode selector for site B?

- A. 192.168.3.0/24
- B. 192.168.2.0/24
- C. 192.168. 1.0/24
- D. 192.168.0.0/8

Answer: C

NEW QUESTION 58

You have enabled logging on your FortiGate device for Event logs and all Security logs, and you have set up logging to use the FortiGate local disk . What is the default behavior when the local disk is full?

- A. Logs are overwritten and the only warning is issued when log disk usage reaches the threshold of 95%.
- B. No new log is recorded until you manually clear logs from the local disk .
- C. Logs are overwritten and the first warning is issued when log disk usage reaches the threshold of 75%.
- D. No new log is recorded after the warning is issued when log disk usage reaches the threshold of 95%.

Answer: C

NEW QUESTION 62

What is the limitation of using a URL list and application control on the same firewall policy, in NGFW policy-based mode?

- A. It limits the scope of application control to the browser-based technology category only.
- B. It limits the scope of application control to scan application traffic based on application category only.
- C. It limits the scope of application control to scan application traffic using parent signatures only
- D. It limits the scope of application control to scan application traffic on DNS protocol only.

Answer: B

NEW QUESTION 65

Refer to the exhibits.
 Exhibit A.

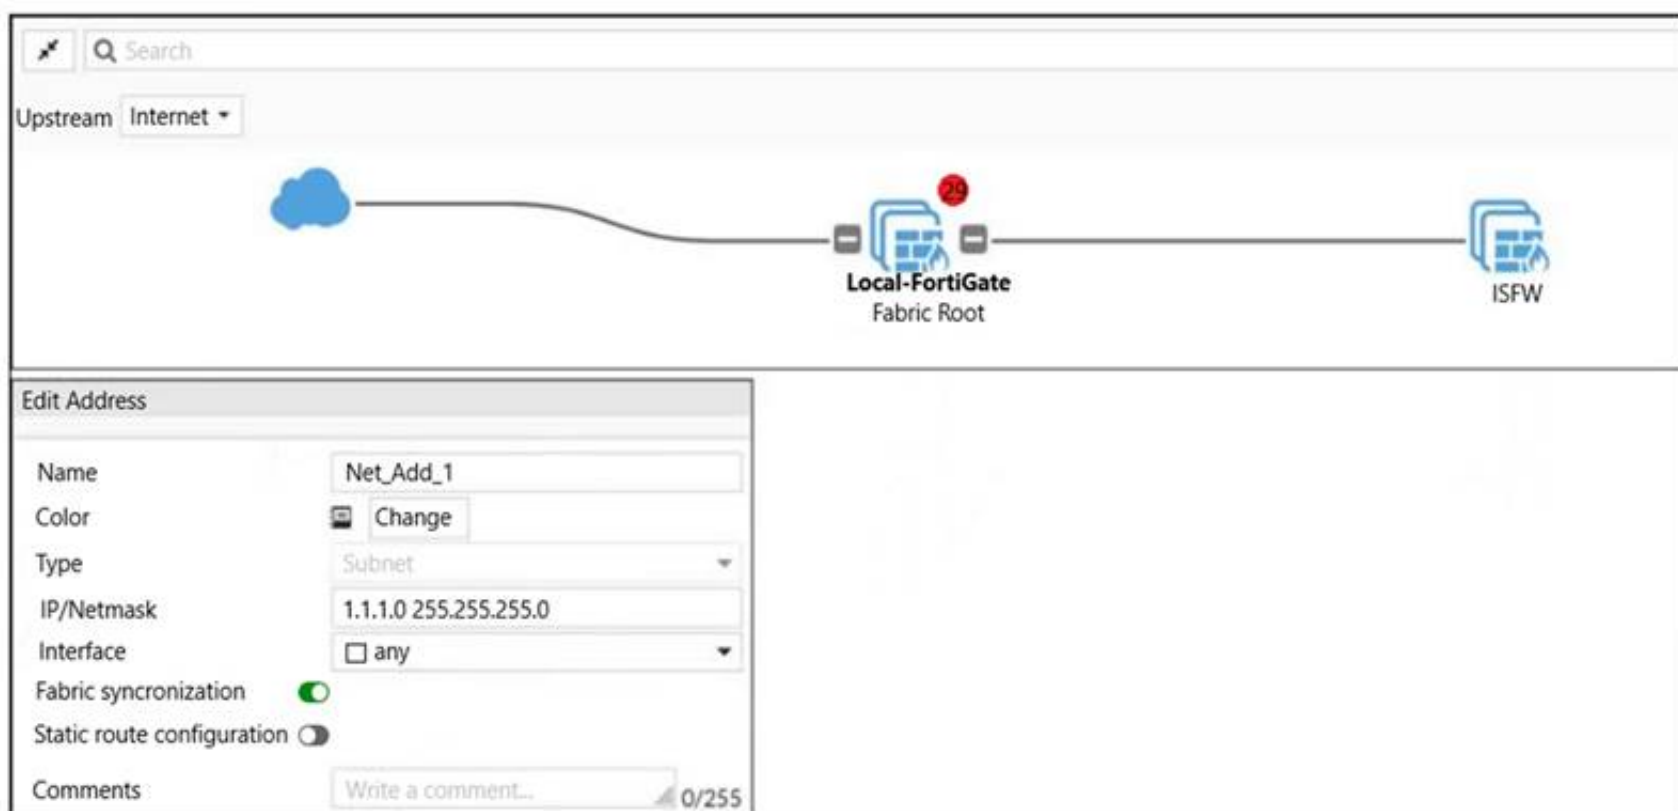


Exhibit B.


```
Local-FortiGate # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 0.0.0.0
    set upstream-port 8013
    set group-name "fortinet"
    set group-password ENC X18CtzrcUBUq9yz9nryP+YfM16
    BJkv7S/trtoh2gYAe5CH8YMAa0GT18aX+/dKH/o5izw1ZEoN1QN2N
    FGLT4r5z2AyYI8i1PxutiLcsCp1AdZadv1CxDe66IdLX7I6o22J9P
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set fabric-object-unification local
    set saml-configuration-sync default
```

```
ISFW # show full-configuration system csf
config system csf
    set status enable
    set upstream-ip 10.0.1.254
    set upstream-port 8013
    set group-name ''
    set accept-auth-by-cert enable
    set log-unification enable
    set authorization-request-type serial
    set fabric-workers 2
    set downstream-access disable
    set configuration-sync default
    set saml-configuration-sync default
end

ISFW #
ISFW #
```

An administrator creates a new address object on the root FortiGate (Local-FortiGate) in the security fabric. After synchronization, this object is not available on the downstream FortiGate (ISFW).
What must the administrator do to synchronize the address object?

- A. Change the csf setting on Local-FortiGate (root) to set configuration-sync local.
- B. Change the csf setting on ISFW (downstream) to set configuration-sync local.
- C. Change the csf setting on Local-FortiGate (root) to set fabric-object-unification default.
- D. Change the csf setting on ISFW (downstream) to set fabric-object-unification default.

Answer: C

NEW QUESTION 66

When configuring a firewall virtual wire pair policy, which following statement is true?

- A. Any number of virtual wire pairs can be included, as long as the policy traffic direction is the same.
- B. Only a single virtual wire pair can be included in each policy.
- C. Any number of virtual wire pairs can be included in each policy, regardless of the policy traffic direction settings.
- D. Exactly two virtual wire pairs need to be included in each policy.

Answer: A

NEW QUESTION 71

Which statement about the IP authentication header (AH) used by IPsec is true?

- A. AH does not provide any data integrity or encryption.
- B. AH does not support perfect forward secrecy.
- C. AH provides data integrity bur no encryption.
- D. AH provides strong data integrity but weak encryption.

Answer: C

NEW QUESTION 73

Refer to exhibit.

An administrator configured the web filtering profile shown in the exhibit to block access to all social networking sites except Twitter. However, when users try to access twitter.com, they are redirected to a FortiGuard web filtering block page.

NameAllow_Twitter

CommentsWrite a comment...0/255

Feature setFlow-basedProxy-based

FortiGuard Category Based Filter

AllowMonitorBlockWarningAuthenticate

Name	Action
Medicine	Allow
News and Media	Allow
Social Networking	Block
Political Organizations	Allow
Reference	Allow
Global Religion	Allow
Shopping	Allow
Society and Lifestyles	Allow
Sports	Allow

Static URL Filter

Block invalid URLs

URL Filter

Create NewEditDeleteSearch

URL	Type	Action	Status
twitter.com	Wildcard	Allow	Enable

Block malicious URLs discovered by FortiSandbox

Content Filter

Based on the exhibit, which configuration change can the administrator make to allow Twitter while blocking all other social networking sites?

- A. On the FortiGuard Category Based Filter configuration, set Action to Warning for Social Networking
- B. On the Static URL Filter configuration, set Type to Simple
- C. On the Static URL Filter configuration, set Action to Exempt.
- D. On the Static URL Filter configuration, set Action to Monitor.

Answer: C

NEW QUESTION 78


Which CLI command will display sessions both from client to the proxy and from the proxy to the servers?

- A. diagnose wad session list
- B. diagnose wad session list | grep hook-pre&&hook-out
- C. diagnose wad session list | grep hook=pre&&hook=out
- D. diagnose wad session list | grep "hook=pre"&"hook=out"

Answer: A

NEW QUESTION 79

A network administrator is troubleshooting an IPsec tunnel between two FortiGate devices. The administrator has determined that phase 1 fails to come up. The administrator has also re-entered the pre-shared key on both FortiGate devices to make sure they match.

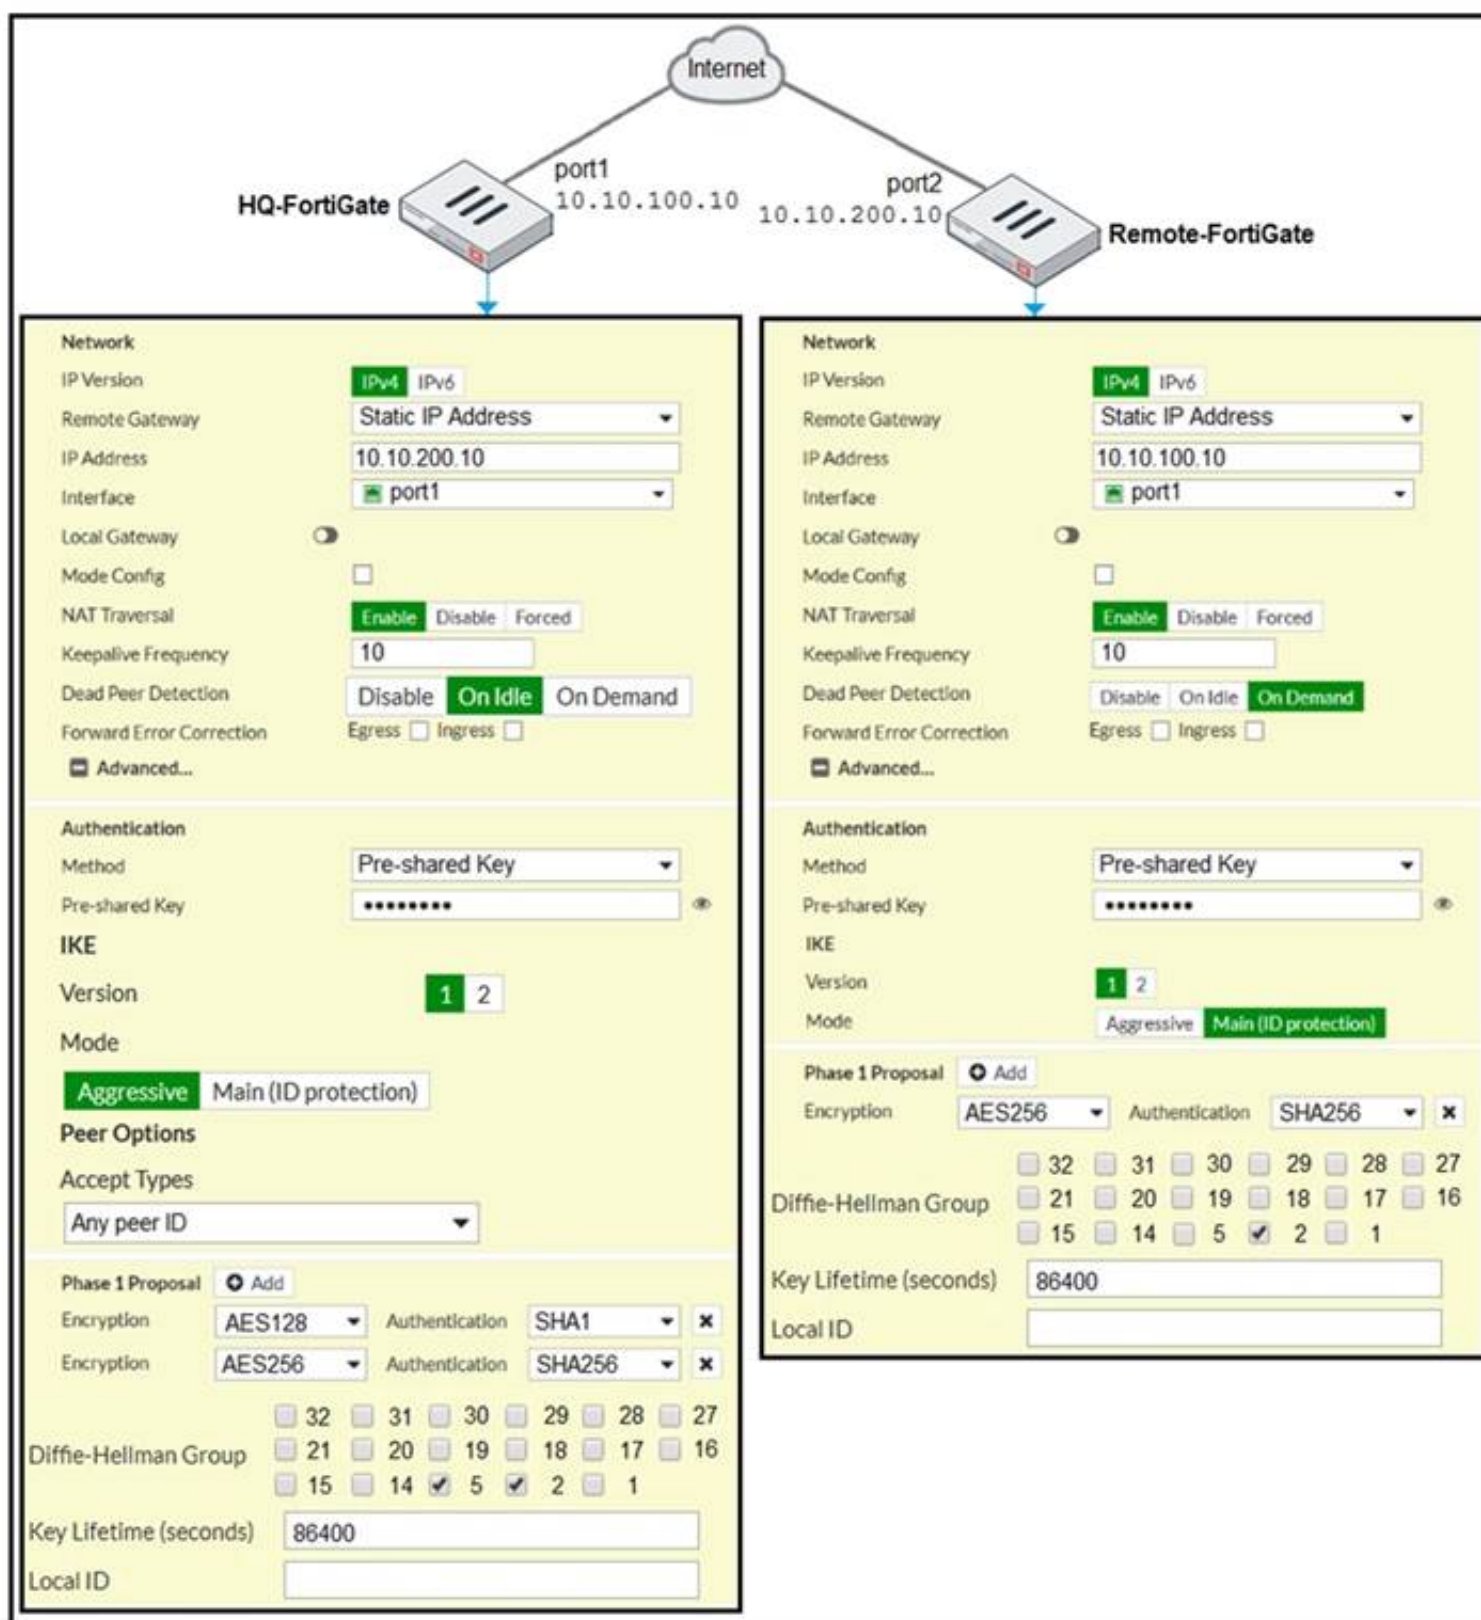

Based on the phase 1 configuration and the diagram shown in the exhibit, which two configuration changes will bring phase 1 up? (Choose two.)

- A. On HQ-FortiGate, set IKE mode to Main (ID protection).
- B. On both FortiGate devices, set Dead Peer Detection to On Demand.
- C. On HQ-FortiGate, disable Diffie-Helman group 2.
- D. On Remote-FortiGate, set port2 as Interface.

Answer: AD

NEW QUESTION 80

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

NSE4_FGT-7.2 Practice Exam Features:

- * NSE4_FGT-7.2 Questions and Answers Updated Frequently
- * NSE4_FGT-7.2 Practice Questions Verified by Expert Senior Certified Staff
- * NSE4_FGT-7.2 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * NSE4_FGT-7.2 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The NSE4_FGT-7.2 Practice Test Here](#)