

# Microsoft

## Exam Questions DP-700

Implementing Data Engineering Solutions Using Microsoft Fabric (beta)



**NEW QUESTION 1**

HOTSPOT - (Topic 1)

You need to create the product dimension.

How should you complete the Apache Spark SQL code? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```
SELECT ProductID, ProductNumber, ProductName, ModelName, SubCategoryName, CategoryName
FROM ContosoLake.Products p
    ContosoLake.ProductSubCategories s ON p.SubCategoryID = s.SubCategoryID
    ContosoLake.ProductCategories c ON c.CategoryID = s.CategoryID
WHERE
```

The image shows a SQL query editor with three dropdown menus for selecting join types and WHERE conditions. The first dropdown is for the join between Products and ProductSubCategories, the second for the join between ProductSubCategories and ProductCategories, and the third for the WHERE clause.

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Join between Products and ProductSubCategories: Use an INNER JOIN.

The goal is to include only products that are assigned to a subcategory. An INNER JOIN ensures that only matching records (i.e., products with a valid subcategory) are included.

Join between ProductSubCategories and ProductCategories: Use an INNER JOIN.

Similar to the above logic, we want to include only subcategories assigned to a valid product category. An INNER JOIN ensures this condition is met.

WHERE Clause Condition: IsActive = 1

Only active products (where IsActive equals 1) should be included in the gold layer. This filters out inactive products.

**NEW QUESTION 2**

- (Topic 1)

You need to populate the MAR1 data in the bronze layer.

Which two types of activities should you include in the pipeline? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. ForEach
- B. Copy data
- C. WebHook
- D. Stored procedure

**Answer:** AB

**Explanation:**

MAR1 has seven entities, each accessible via a different API endpoint. A ForEach activity is required to iterate over these endpoints to fetch data from each one. It enables dynamic execution of API calls for each entity.

The Copy data activity is the primary mechanism to extract data from REST APIs and load it into the bronze layer in Delta format. It supports native connectors for REST APIs and Delta, minimizing development effort.

You need to schedule the population of the medallion layers to meet the technical requirements.

What should you do?

- \* A. Schedule a data pipeline that calls other data pipelines.
- \* B. Schedule a notebook.
- \* C. Schedule an Apache Spark job.
- \* D. Schedule multiple data pipelines.

\* Answer: A

The technical requirements specify that:

Medallion layers must be fully populated sequentially (bronze silver gold). Each layer must be populated before the next.

If any step fails, the process must notify the data engineers. Data imports should run simultaneously when possible.

Why Use a Data Pipeline That Calls Other Data Pipelines?

A data pipeline provides a modular and reusable approach to orchestrating the sequential population of medallion layers.

By calling other pipelines, each pipeline can focus on populating a specific layer (bronze, silver, or gold), simplifying development and maintenance.

A parent pipeline can handle:

- Sequential execution of child pipelines.
- Error handling to send email notifications upon failures.
- Parallel execution of tasks where possible (e.g., simultaneous imports into the bronze layer).

### NEW QUESTION 3

- (Topic 1)

You need to ensure that the data analysts can access the gold layer lakehouse. What should you do?

- A. Add the DataAnalyst group to the Viewer role for WorkspaceA.
- B. Share the lakehouse with the DataAnalysts group and grant the Build reports on the default semantic model permission.
- C. Share the lakehouse with the DataAnalysts group and grant the Read all SQL Endpoint data permission.
- D. Share the lakehouse with the DataAnalysts group and grant the Read all Apache Spark permission.

**Answer: C**

#### Explanation:

Data Analysts' Access Requirements must only have read access to the Delta tables in the gold layer and not have access to the bronze and silver layers.

The gold layer data is typically queried via SQL Endpoints. Granting the Read all SQL Endpoint data permission allows data analysts to query the data using familiar SQL-based tools while restricting access to the underlying files.

### NEW QUESTION 4

- (Topic 2)

You need to resolve the sales data issue. The solution must minimize the amount of data transferred.

What should you do?

- A. Spilt the dataflow into two dataflows.
- B. Configure scheduled refresh for the dataflow.
- C. Configure incremental refresh for the dataflo
- D. Set Store rows from the past to 1 Month.
- E. Configure incremental refresh for the dataflo
- F. Set Refresh rows from the past to 1 Year.
- G. Configure incremental refresh for the dataflo
- H. Set Refresh rows from the past to 1 Month.

**Answer: E**

#### Explanation:

The sales data issue can be resolved by configuring incremental refresh for the dataflow. Incremental refresh allows for only the new or changed data to be processed, minimizing the amount of data transferred and improving performance.

The solution specifies that data older than one month never changes, so setting the refresh period to 1 Month is appropriate. This ensures that only the most recent month of data will be refreshed, reducing unnecessary data transfers.

### NEW QUESTION 5

- (Topic 2)

You need to implement the solution for the book reviews.

Which should you do?

- A. Create a Dataflow Gen2 dataflow.
- B. Create a shortcut.
- C. Enable external data sharing.
- D. Create a data pipeline.

**Answer: B**

#### Explanation:

The requirement specifies that Litware plans to make the book reviews available in the lakehouse without making a copy of the data. In this case, creating a shortcut in Fabric is the most appropriate solution. A shortcut is a reference to the external data, and it allows Litware to access the book reviews stored in Amazon S3 without duplicating the data into the lakehouse.

### NEW QUESTION 6

- (Topic 3)

You have an Azure event hub. Each event contains the following fields: BikepointID

Street Neighbourhood

Latitude Longitude No\_Bikes No\_Empty\_Docks

You need to ingest the events. The solution must only retain events that have a Neighbourhood value of Chelsea, and then store the retained events in a Fabric lakehouse.

What should you use?

- A. a KQL queryset
- B. an eventstream

- C. a streaming dataset
- D. Apache Spark Structured Streaming

**Answer:** B

**Explanation:**

An eventstream is the best solution for ingesting data from Azure Event Hub into Fabric, while applying filtering logic such as retaining only the events that have a Neighbourhood value of "Chelsea." Eventstreams in Microsoft Fabric are designed for handling real-time data streams and can apply transformation logic directly on incoming events. In this case, the eventstream can filter events based on the Neighbourhood field before storing the retained events in a Fabric lakehouse. Eventstreams are well-suited for stream processing, such as this case where you need to filter out only specific data (events with a Neighbourhood of "Chelsea") before storing it in the lakehouse.

**NEW QUESTION 7**

- (Topic 3)

You have a Fabric warehouse named DW1 that loads data by using a data pipeline named Pipeline1. Pipeline1 uses a Copy data activity with a dynamic SQL source. Pipeline1 is scheduled to run every 15 minutes.

You discover that Pipeline1 keeps failing.

You need to identify which SQL query was executed when the pipeline failed. What should you do?

- A. From Monitoring hub, select the latest failed run of Pipeline1, and then view the output JSON.
- B. From Monitoring hub, select the latest failed run of Pipeline1, and then view the input JSON.
- C. From Real-time hub, select Fabric events, and then review the details of Microsoft.Fabric.ItemReadFailed.
- D. From Real-time hub, select Fabric events, and then review the details of Microsoft.Fabric.ItemUpdateFailed.
- E. From Real-time hub, select Fabric events, and then review the details of Microsoft.Fabric.ItemReadFailed.

**Answer:** B

**Explanation:**

The input JSON contains the configuration details and parameters passed to the Copy data activity during execution, including the dynamically generated SQL query.

Viewing the input JSON for the failed pipeline run provides direct insight into what query was executed at the time of failure.

**NEW QUESTION 8**

- (Topic 3)

You have a Fabric workspace that contains a lakehouse named Lakehouse1. Data is ingested into Lakehouse1 as one flat table. The table contains the following columns.

Name	Description
TransactionID	Contains a unique ID for each transaction
Date	Contains the date of a transaction
ProductID	Contains a unique ID for each product
ProductColor	Contains a descriptive attribute that describes the color of each product
ProductName	Contains a unique name for each product
SalesAmount	Contains the sales amount of a transaction

You plan to load the data into a dimensional model and implement a star schema. From the original flat table, you create two tables named FactSales and DimProduct. You will track changes in DimProduct.

You need to prepare the data.

Which three columns should you include in the DimProduct table? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Date
- B. ProductName
- C. ProductColor
- D. TransactionID
- E. SalesAmount
- F. ProductID

**Answer:** BCF

**Explanation:**

In a star schema, the DimProduct table serves as a dimension table that contains descriptive attributes about products. It will provide context for the FactSales table, which contains transactional data. The following columns should be included in the DimProduct table:

? ProductName: The ProductName is an important descriptive attribute of the product, which is needed for analysis and reporting in a dimensional model.

? ProductColor: ProductColor is another descriptive attribute of the product. In a star schema, it makes sense to include attributes like color in the dimension table to help categorize products in the analysis.

? ProductID: ProductID is the primary key for the DimProduct table, which will be used to join the FactSales table to the product dimension. It's essential for uniquely identifying each product in the model.

**NEW QUESTION 9**

- (Topic 3)

You have a Fabric workspace that contains a warehouse named Warehouse1. Data is loaded daily into Warehouse1 by using data pipelines and stored procedures.

You discover that the daily data load takes longer than expected.

You need to monitor Warehouse1 to identify the names of users that are actively running queries.

Which view should you use?

- A. sys.dm\_exec\_connections
- B. sys.dm\_exec\_requests
- C. queryinsights.long\_running\_queries
- D. queryinsights.frequently\_run\_queries
- E. sys.dm\_exec\_sessions

**Answer: E**

**Explanation:**

sys.dm\_exec\_sessions provides real-time information about all active sessions, including the user, session ID, and status of the session. You can filter on session status to see users actively running queries.

**NEW QUESTION 10**

- (Topic 3)

You have a Fabric warehouse named DW1. DW1 contains a table that stores sales data and is used by multiple sales representatives.

You plan to implement row-level security (RLS).

You need to ensure that the sales representatives can see only their respective data. Which warehouse object do you require to implement RLS?

- A. ISTORED PROCEDURE
- B. CONSTRAINT
- C. SCHEMA
- D. FUNCTION

**Answer: D**

**Explanation:**

To implement Row-Level Security (RLS) in a Fabric warehouse, you need to use a function that defines the security logic for filtering the rows of data based on the user's identity or role. This function can be used in conjunction with a security policy to control access to specific rows in a table.

In the case of sales representatives, the function would define the filtering criteria (e.g., based on a column such as SalesRepID or SalesRepName), ensuring that each representative can only see their respective data.

**NEW QUESTION 10**

HOTSPOT - (Topic 3)

You have a Fabric workspace that contains a warehouse named Warehouse1. Warehouse1 contains a table named Customer. Customer contains the following data.

CustomerID	FirstName	LastName	Phone	CreditCard
1	John	Doe	555-123-4567	1234567812345670
2	Jane	Smith	555-987-6543	8765432187654320
3	Michael	Johnson	555-555-5555	1234987654321230
4	Emily	Davis	555-222-3333	4321123456789870
5	David	Brown	555-444-5555	5678123498761230

You have an internal Microsoft Entra user named User1 that has an email address of user1@contoso.com.

You need to provide User1 with access to the Customer table. The solution must prevent User1 from accessing the CreditCard column.

How should you complete the statement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

GRANT  ▾

- ALTER
- EXECUTE
- READ
- SELECT**
- VIEW

Customers(CustomerID, FirstName, LastName, Phone)

TO  ▾

- User1
- [User1]
- [user1@contoso.com]**

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

GRANT  ▾

- ALTER
- EXECUTE
- READ
- SELECT**
- VIEW

Customers(CustomerID, FirstName, LastName, Phone)

TO  ▾

- User1
- [User1]
- [user1@contoso.com]**

NEW QUESTION 11

HOTSPOT - (Topic 3)

You have a Fabric workspace named Workspace1 that contains a warehouse named Warehouse2. A team of data analysts has Viewer role access to Workspace1. You create a table by running the following statement.

```
CREATE TABLE [warehouse2].[dbo].[CreditCard]
(
    CreditCard varchar(20) NOT NULL
    ,CreditCardType varchar(10) NOT NULL)
GO
```

You need to ensure that the team can view only the first two characters and the last four characters of the Creditcard attribute. How should you complete the statement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Answer Area

**NEW QUESTION 16**

- (Topic 3)

You need to develop an orchestration solution in fabric that will load each item one after the other. The solution must be scheduled to run every 15 minutes. Which type of item should you use?

- A. warehouse
- B. data pipeline
- C. Dataflow Gen2 dataflow
- D. notebook

**Answer:** B

**NEW QUESTION 17**

DRAG DROP - (Topic 3)

You are building a data loading pattern by using a Fabric data pipeline. The source is an Azure SQL database that contains 25 tables. The destination is a lakehouse.

In a warehouse, you create a control table named Control.Object as shown in the exhibit. (Click the Exhibit tab.)

You need to build a data pipeline that will support the dynamic ingestion of the tables listed in the control table by using a single execution.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

- ☰ Add a Get metadata activity to query Control.Object and generate a list of schemas and tables to copy.
- ☰ Add an Until activity to iterate over the list of tables and copy the source data to the lakehouse Delta tables.
- ☰ Add a Lookup activity to query Control.Object and generate a list of the schemas and tables to copy.
- ☰ Add a ForEach activity to iterate over the list of tables and copy the source data to the lakehouse Delta tables.
- ☰ Add a Copy data activity as an inner activity to the iterator activity.

Answer Area

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Actions

- ☰ Add a Get metadata activity to query Control.Object and generate a list of schemas and tables to copy.
- ☰ Add an Until activity to iterate over the list of tables and copy the source data to the lakehouse Delta tables.
- ☰ Add a Lookup activity to query Control.Object and generate a list of the schemas and tables to copy.
- ☰ Add a ForEach activity to iterate over the list of tables and copy the source data to the lakehouse Delta tables.
- ☰ Add a Copy data activity as an inner activity to the iterator activity.

Answer Area

- ☰ Add a Lookup activity to query Control.Object and generate a list of the schemas and tables to copy.
- ☰ Add a ForEach activity to iterate over the list of tables and copy the source data to the lakehouse Delta tables.
- ☰ Add a Copy data activity as an inner activity to the iterator activity.

**NEW QUESTION 20**

- (Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Fabric eventstream that loads data into a table named Bike\_Location in a KQL database. The table contains the following columns:

BikepointID Street Neighbourhood No\_Bikes No\_Empty\_Docks Timestamp

You need to apply transformation and filter logic to prepare the data for consumption. The

solution must return data for a neighbourhood named Sands End when No\_Bikes is at least 15. The results must be ordered by No\_Bikes in ascending order.

Solution: You use the following code segment:

```
bike_location
| filter Neighbourhood == "Sands End" and No_Bikes >= 15
| sort by No_Bikes
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
```

Does this meet the goal?

- A. Yes
- B. no

**Answer:** B

**Explanation:**


This code does not meet the goal because it uses sort by without specifying the order, which defaults to ascending, but explicitly mentioning asc improves clarity. Correct code should look like:

```
bike_location
| filter Neighbourhood == "Sands End" and No_Bikes >= 15
| sort by No_Bikes asc
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
```

**NEW QUESTION 25**

- (Topic 3)

You have a Fabric workspace that contains a data pipeline named Pipeline1 as shown in the exhibit.

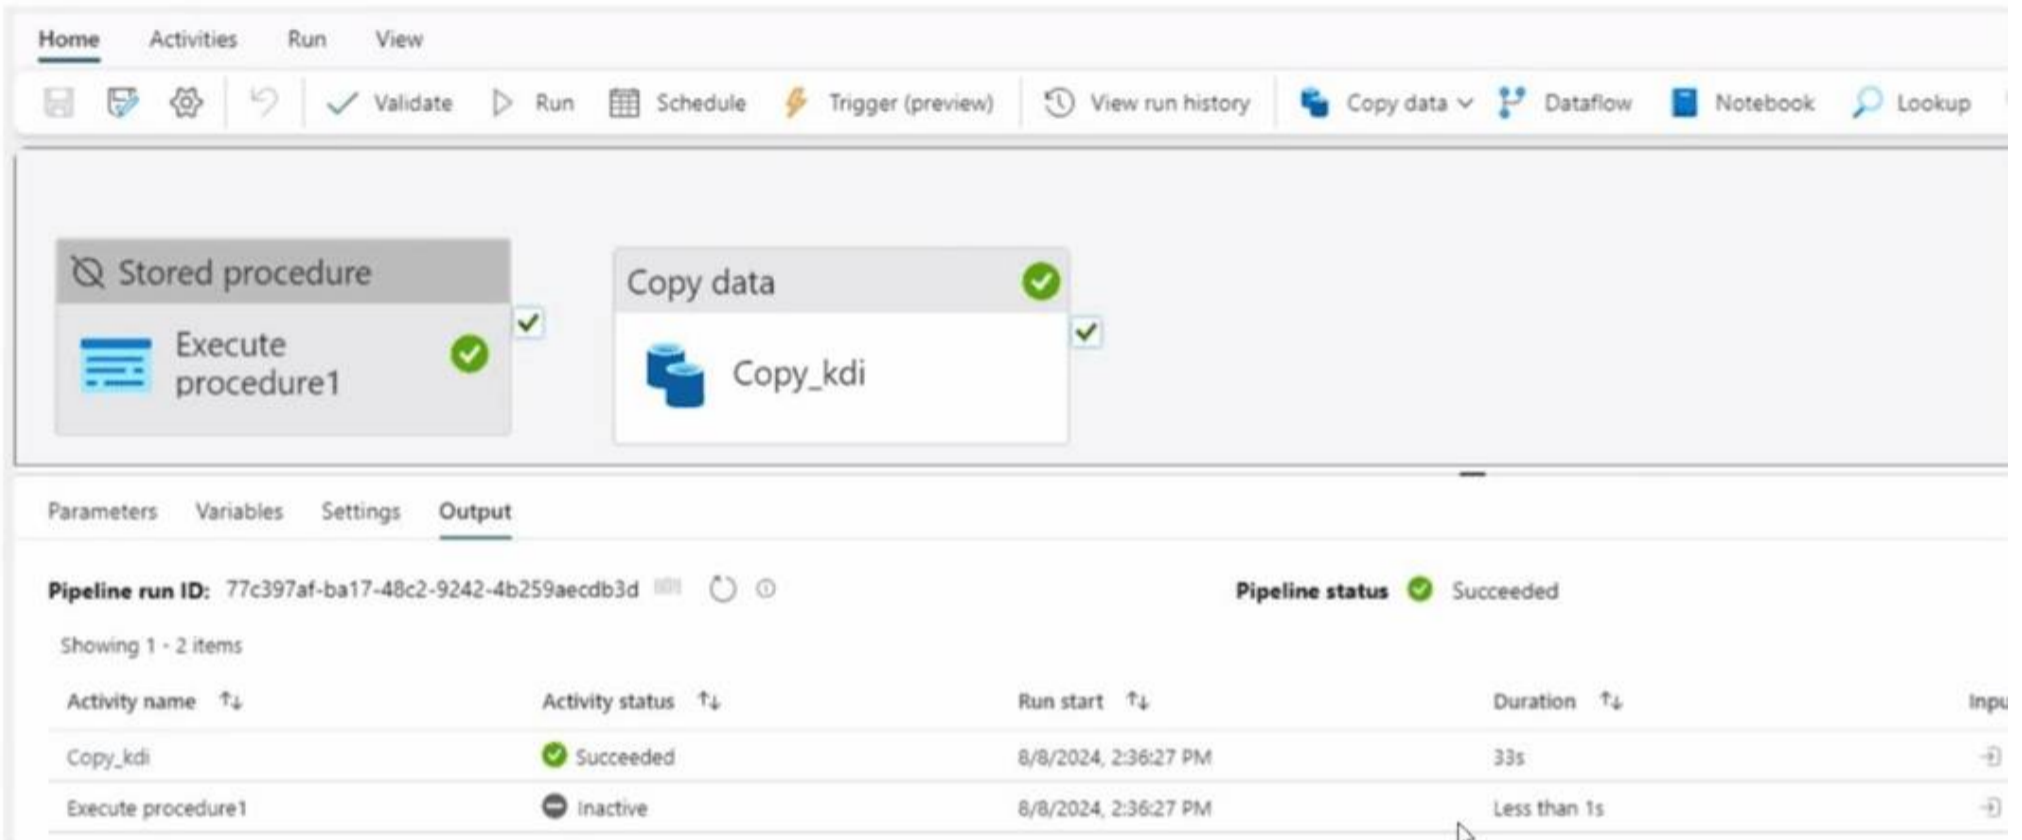

What will occur the next time Pipeline1 runs?

- A. Both activities will run simultaneously.
- B. Both activities will be skipped.
- C. Execute procedure1 will run and Copy\_kdi will be skipped.
- D. Copy\_kdi will run and Execute procedure1 will be skipped.
- E. Execute procedure1 will run first, and then Copy\_kdi will run.
- F. Copy\_kdi will run first, and then Execute procedure1 will run.

**Answer: A**

**NEW QUESTION 27**

- (Topic 3)

You have a Fabric workspace that contains an eventstream named EventStream1. EventStream1 outputs events to a table named Table1 in a lakehouse. The streaming data is sourced from motorway sensors and represents the speed of cars.

You need to add a transformation to EventStream1 to average the car speeds. The speeds must be grouped by non-overlapping and contiguous time intervals of one minute. Each event must belong to exactly one window.

Which windowing function should you use?

- A. sliding
- B. hopping
- C. tumbling
- D. session

**Answer: C**

**NEW QUESTION 29**

- (Topic 3)

You have a Fabric workspace that contains a warehouse named Warehouse1.

You have an on-premises Microsoft SQL Server database named Database1 that is accessed by using an on-premises data gateway.

You need to copy data from Database1 to Warehouse1. Which item should you use?

- A. a Dataflow Gen1 dataflow
- B. a data pipeline
- C. a KQL queryset
- D. a notebook

**Answer: B**

**Explanation:**

To copy data from an on-premises Microsoft SQL Server database (Database1) to a warehouse (Warehouse1) in Microsoft Fabric, the best option is to use a data pipeline. A data pipeline in Fabric allows for the orchestration of data movement, from source to destination, using connectors, transformations, and scheduled workflows. Since the data is being transferred from an on-premises database and requires the use of a data gateway, a data pipeline provides the appropriate framework to facilitate this data movement efficiently and reliably.

**NEW QUESTION 33**

HOTSPOT - (Topic 3)

You need to recommend a Fabric streaming solution that will use the sources shown in the following table.

Name	Message size	Description
Source1	10 MB	Contains semi-structured data that has a bigint column in the messages
Source2	25 MB	Contains structured data that has 19 columns
Source3	5 MB	Contains unstructured data that has images in the messages

The solution must minimize development effort.

What should you include in the recommendation for each source? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

**Answer Area**

Source1: 

- Apache Spark Structured Streaming
- An eventstream
- A data pipeline
- A streaming dataflow**
- An eventstream

Source2: 

- Apache Spark Structured Streaming
- An eventstream
- A data pipeline**
- A streaming dataflow

Source3: 

- Apache Spark Structured Streaming
- An eventstream**
- A data pipeline
- A streaming dataflow

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

Answer Area

Source1: 

- Apache Spark Structured Streaming
- An eventstream
- A data pipeline
- A streaming dataflow**
- An eventstream

Source2: 

- Apache Spark Structured Streaming
- An eventstream
- A data pipeline**
- A streaming dataflow

Source3: 

- Apache Spark Structured Streaming
- An eventstream**
- A data pipeline
- A streaming dataflow

**NEW QUESTION 37**

HOTSPOT - (Topic 3)

You have a Fabric workspace that contains a warehouse named Warehouse1. Warehouse1 contains the following tables and columns.

Table name	Column name	Data type
Employee	EmployeeID	Int
Employee	EmployeeName	Varchar(128)
Employee	EmployeePosition	Varchar(64)
Contract	EmployeeID	Int
Contract	ContractType	Varchar(64)
Contract	StartDate	Datetime2
Contract	EndDate	Datetime2

You need to denormalize the tables and include the ContractType and StartDate columns in the Employee table. The solution must meet the following requirements:

Ensure that the StartDate column is of the date data type.

Ensure that all the rows from the Employee table are preserved and include any matching rows from the Contract table.

Ensure that the result set displays the total number of employees per contract type for all the contract types that have more than two employees.

How should you complete the statement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

**Answer Area**

WITH result AS(


SELECT e.EmployeeID

, e.EmployeeName

, e.EmployeePosition

, c.ContractType

, (date, c.StartDate) as StartDate

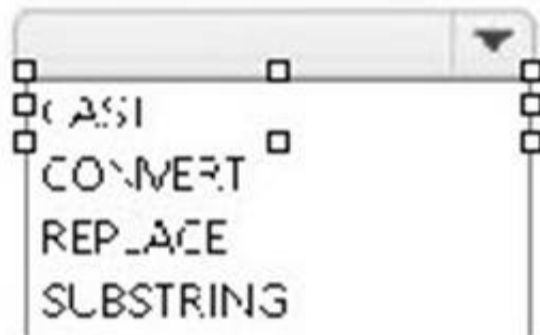

FROM Employee AS e

Contract AS c on c.EmployeeID = e.EmployeeID



)


SELECT COUNT(DISTINCT EmployeeID) AS TotalEmployees

, ContractType

FROM result

GROUP BY ContractType

COUNT(DISTINCT EmployeeID) > 2

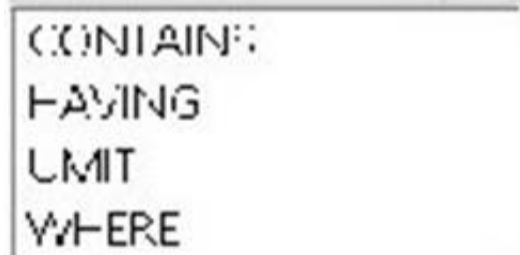

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

**Answer Area**

WITH result AS(

SELECT e.EmployeeID

, e.EmployeeName

, e.EmployeePosition

, c.ContractType

, (date, c.StartDate) as StartDate



FROM Employee AS e



Contract AS c on c.EmployeeID = e.EmployeeID

)  
 SELECT COUNT(DISTINCT EmployeeID) AS TotalEmployees

, ContractType

FROM result

GROUP BY ContractType



COUNT(DISTINCT EmployeeID) > 2

WHERE

**NEW QUESTION 42**

- (Topic 3)

You have five Fabric workspaces.

You are monitoring the execution of items by using Monitoring hub.

You need to identify in which workspace a specific item runs. Which column should you view in Monitoring hub?

- A. Start time
- B. Capacity
- C. Activity name
- D. Submitter
- E. Item type
- F. Job type
- G. Location

**Answer: G**

**Explanation:**

To identify in which workspace a specific item runs in Monitoring hub, you should view the Location column. This column indicates the workspace where the item is executed. Since you have multiple workspaces and need to track the execution of items across them, the Location column will show you the exact workspace associated with each item or job execution.

**NEW QUESTION 47**

- (Topic 3)

You have a Fabric workspace named Workspace1. You plan to integrate Workspace1 with Azure DevOps.

You will use a Fabric deployment pipeline named deployPipeline1 to deploy items from Workspace1 to higher environment workspaces as part of a medallion architecture. You will run deployPipeline1 by using an API call from an Azure DevOps pipeline.

You need to configure API authentication between Azure DevOps and Fabric. Which type of authentication should you use?

- A. service principal
- B. Microsoft Entra username and password
- C. managed private endpoint
- D. workspace identity

**Answer:** A

**Explanation:**

When integrating Azure DevOps with Fabric (Workspace1), using a service principal is the recommended authentication method. A service principal provides a way for applications (such as an Azure DevOps pipeline) to authenticate and interact with resources securely. It allows Azure DevOps to authenticate API calls to Fabric without requiring direct user credentials. This method is ideal for automating tasks such as deploying items through a Fabric deployment pipeline.

**NEW QUESTION 51**

DRAG DROP - (Topic 3)

You have two Fabric notebooks named Load\_Salesperson and Load\_Orders that read data from Parquet files in a lakehouse. Load\_Salesperson writes to a Delta table named dim\_salesperson. Load.Orders writes to a Delta table named fact\_orders and is dependent on the successful execution of Load\_Salesperson.

You need to implement a pattern to dynamically execute Load\_Salesperson and Load\_Orders in the appropriate order by using a notebook.

How should you complete the code? To answer, drag the appropriate values the correct targets. Each value may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Values	Answer Area
<div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">activities</div> <div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">broadcast</div> <div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">dependencies</div> <div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">execute</div> <div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">notebooks</div> <div style="border: 1px solid #ccc; padding: 5px; margin-bottom: 5px;">runMultiple</div>	<pre> name : Load_Salesperson , "path": "Load_Salesperson", "timeoutPerCellInSeconds": 300, }, { "name": "Load_Orders", "path": "Load_Orders", "timeoutPerCellInSeconds": 600, " [ ] ": ["Load_Salesperson"] } }, "timeoutInSeconds": 43200 } mssparkutils.notebook. [ ] (DAG)                     </pre>

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

**Values**

- activities
- broadcast
- dependencies
- execute
- notebooks
- runMultiple

**Answer Area**

```

name : Load_Salesperson ,
"path": "Load_Salesperson",
"timeoutPerCellInSeconds": 300,
},
{
"name": "Load_Orders",
"path": "Load_Orders",
"timeoutPerCellInSeconds": 600,
"dependencies": ["Load_Salesperson"]
}
],
"timeoutInSeconds": 43200
}
mssparkutils.notebook.runMultiple (DAG)
                    
```

**NEW QUESTION 56**

- (Topic 3)

You have a Fabric F32 capacity that contains a workspace. The workspace contains a warehouse named DW1 that is modelled by using MD5 hash surrogate keys.

DW1 contains a single fact table that has grown from 200 million rows to 500 million rows during the past year.

You have Microsoft Power BI reports that are based on Direct Lake. The reports show year-over-year values.

Users report that the performance of some of the reports has degraded over time and some visuals show errors.

You need to resolve the performance issues. The solution must meet the following requirements:

Provide the best query performance. Minimize operational costs.

Which should you do?

- A. Change the MD5 hash to SHA256.
- B. Increase the capacity.
- C. Enable V-Order
- C. Modify the surrogate keys to use a different data type.
- D. Create views.

**Answer:** D

**Explanation:**

In this case, the key issue causing performance degradation likely stems from the use of MD5 hash surrogate keys. MD5 hashes are 128-bit values, which can be inefficient for large datasets like the 500 million rows in your fact table. Using a more efficient data type for surrogate keys (such as integer or bigint) would reduce the storage and processing overhead, leading to better query performance. This approach will improve performance while minimizing operational costs because it reduces the complexity of querying and indexing, as smaller data types are generally faster and more efficient to process.

**NEW QUESTION 61**

- (Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a KQL database that contains two tables named Stream and Reference. Stream contains streaming data in the following format.

Column name	Data type
Timestamp	Datetime
GeoLocation	Dynamic
Temperature	Decimal
DeviceId	Int

Reference contains reference data in the following format.

Column name	Data type
DeviceId	Int
DeviceName	String

Both tables contain millions of rows. You have the following KQL queryset.

01 Stream

02 | extend lat = todecimal(GeoLocation.Latitude), long = todecimal(GeoLocation.Longitude)

03 | join kind=inner Reference on DeviceId

04 | project Timestamp, lat, long, Temperature, DeviceName

05 | filter Temperature >= 10

06 | render scatterchart with (kind = map)

You need to reduce how long it takes to run the KQL queryset. Solution: You change project to extend. Does this meet the goal?

- A. Yes
- B. No

**Answer: B**

**Explanation:**

Using extend retains all columns in the table, potentially increasing the size of the output unnecessarily. project is more efficient because it selects only the required columns.

**NEW QUESTION 63**

- (Topic 3)

You have a Fabric workspace that contains a warehouse named DW1. DW1 is loaded by using a notebook named Notebook1. You need to identify which version of Delta was used when Notebook1 was executed. What should you use?

- A. Real-Time hub
- B. OneLake data hub
- C. the Admin monitoring workspace
- D. Fabric Monitor
- E. the Microsoft Fabric Capacity Metrics app

**Answer: C**

**Explanation:**

To identify the version of Delta used when Notebook1 was executed, you should use the Admin monitoring workspace. The Admin monitoring workspace allows you to track and monitor detailed information about the execution of notebooks and jobs, including the underlying versions of Delta or other technologies used. It provides insights into execution details, including versions and configurations used during job runs, making it the most appropriate choice for identifying the Delta version used during the execution of Notebook1.

**NEW QUESTION 67**

- (Topic 3)

You have a Fabric warehouse named DW1 that contains a Type 2 slowly changing dimension (SCD) dimension table named DimCustomer. DimCustomer contains 100 columns and 20 million rows. The columns are of various data types, including int, varchar, date, and varbinary.

You need to identify incoming changes to the table and update the records when there is a change. The solution must minimize resource consumption. What should you use to identify changes to attributes?

- A. a direct attributes comparison for the attributes in the source table.
- B. a hash function to compare the attributes in the DimCustomer table.
- C. a direct attributes comparison across the attributes in the DimCustomer table.
- D. a hash function to compare the attributes in the source table.

**Answer: D**

**NEW QUESTION 70**

- (Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some

question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Fabric eventstream that loads data into a table named Bike\_Location in a KQL database. The table contains the following columns:

BikepointID Street Neighbourhood No\_Bikes No\_Empty\_Docks Timestamp

You need to apply transformation and filter logic to prepare the data for consumption. The solution must return data for a neighbourhood named Sands End when

No\_Bikes is at least 15. The results must be ordered by No\_Bikes in ascending order.

Solution: You use the following code segment:

```
bike_location
| filter Neighbourhood == "Sands End" and No_Bikes >= 15
| order by No_Bikes
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
```

Does this meet the goal?

- A. Yes
- B. no

**Answer:** B

**Explanation:**

This code does not meet the goal because it uses order by, which is not valid in KQL. The correct term in KQL is sort by. Correct code should look like:

```
bike_location
| filter Neighbourhood == "Sands End" and No_Bikes >= 15
| sort by No_Bikes asc
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
```

**NEW QUESTION 71**

- (Topic 3)

You have a Fabric workspace named Workspace1 that contains a lakehouse named Lakehouse1. Lakehouse1 contains the following tables:

- Orders
- Customer Employee

The Employee table contains Personally Identifiable Information (PII).

A data engineer is building a workflow that requires writing data to the Customer table, however, the user does NOT have the elevated permissions required to view the contents of the Employee table.

You need to ensure that the data engineer can write data to the Customer table without reading data from the Employee table.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Share Lakehouse1 with the data engineer.
- B. Assign the data engineer the Contributor role for Workspace2.
- C. Assign the data engineer the Viewer role for Workspace2.
- D. Assign the data engineer the Contributor role for Workspace1.
- E. Migrate the Employee table from Lakehouse1 to Lakehouse2.
- F. Create a new workspace named Workspace2 that contains a new lakehouse named Lakehouse2.
- G. Assign the data engineer the Viewer role for Workspace1.

**Answer:** ADE

**Explanation:**

To meet the requirements of ensuring that the data engineer can write data to the Customer table without reading data from the Employee table (which contains Personally Identifiable Information, or PII), you can implement the following steps:

? Share Lakehouse1 with the data engineer.

By sharing Lakehouse1 with the data engineer, you provide the necessary access to the data within the lakehouse. However, this access should be controlled through roles and permissions, which will allow writing to the Customer table but prevent reading from the Employee table.

? Assign the data engineer the Contributor role for Workspace1.

Assigning the Contributor role for Workspace1 grants the data engineer the ability to perform actions such as writing to tables (e.g., the Customer table) within the workspace. This role typically allows users to modify and manage data without necessarily granting them access to view all data (e.g., PII data in the Employee table).

? Migrate the Employee table from Lakehouse1 to Lakehouse2.

To prevent the data engineer from accessing the Employee table (which contains PII), you can migrate the Employee table to a separate lakehouse (Lakehouse2) or workspace

(Workspace2). This separation of sensitive data ensures that the data engineer's access is restricted to the Customer table in Lakehouse1, while the Employee table can be managed separately and protected under different access controls.

**NEW QUESTION 75**

- (Topic 3)

You have a Fabric workspace named Workspace1. Your company acquires GitHub licenses.

You need to configure source control for Workspace1 to use GitHub. The solution must follow the principle of least privilege. Which permissions do you require to ensure that you can commit code to GitHub?

- A. Actions (Read and write) and Contents (Read and write)
- B. Actions (Read and write) only
- C. Contents (Read and write) only
- D. Contents (Read) and Commit statuses (Read and write)

Answer: C

**NEW QUESTION 80**

- (Topic 3)

You have a Google Cloud Storage (GCS) container named storage1 that contains the files shown in the following table.

Name	Size
ProductFile.parquet	8 MB
StoreFile.json	500 MB
TripsFile.csv	99 MB

You have a Fabric workspace named Workspace1 that has the cache for shortcuts enabled. Workspace1 contains a lakehouse named Lakehouse1. Lakehouse1 has the shortcuts shown in the following table.

Name	Source	Last accessed
Products	ProductFile	12 hours ago
Stores	StoreFile	4 hours ago
Trips	TripsFile	48 hours ago

You need to read data from all the shortcuts. Which shortcuts will retrieve data from the cache?

- A. Stores only
- B. Products only
- C. Stores and Products only
- D. Products, Stores, and Trips
- E. Trips only
- F. Products and Trips only

Answer: C

**Explanation:**

When reading data from shortcuts in Fabric (in this case, from a lakehouse like Lakehouse1), the cache for shortcuts helps by storing the data locally for quick access. The last accessed timestamp and the cache expiration rules determine whether data is fetched from the cache or from the source (Google Cloud Storage, in this case).

Products: The ProductFile.parquet was last accessed 12 hours ago. Since the cache has data available for up to 12 hours, it is likely that this data will be retrieved from the cache, as it hasn't been too long since it was last accessed.

Stores: The StoreFile.json was last accessed 4 hours ago, which is within the cache retention period. Therefore, this data will also be retrieved from the cache.

Trips: The TripsFile.csv was last accessed 48 hours ago. Given that it's outside the typical caching window (assuming the cache has a maximum retention period of around 24 hours), it would not be retrieved from the cache. Instead, it will likely require a fresh read from the source.

**NEW QUESTION 85**

- (Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a KQL database that contains two tables named Stream and Reference. Stream contains streaming data in the following format.

Column name	Data type
Timestamp	Datetime
GeoLocation	Dynamic
Temperature	Decimal
DeviceId	Int

Reference contains reference data in the following format.

Column name	Data type
DeviceId	Int
DeviceName	String

Both tables contain millions of rows. You have the following KQL queryset.

You need to reduce how long it takes to run the KQL queryset. Solution: You add the make\_list() function to the output columns. Does this meet the goal?

01 Stream

02 | extend lat = todecimal(GeoLocation.Latitude), long = todecimal(GeoLocation.Longitude)

03 | join kind=inner Reference on DeviceId

04 | project Timestamp, lat, long, Temperature, DeviceName

05 | filter Temperature >= 10

06 | render scatterchart with (kind = map)

- A. Yes
- B. No

**Answer:** B

**Explanation:**

Adding an aggregation like make\_list() would require additional processing and memory, which could make the query slower.

**NEW QUESTION 90**

HOTSPOT - (Topic 3)

You have an Azure Event Hubs data source that contains weather data.

You ingest the data from the data source by using an eventstream named Eventstream1. Eventstream1 uses a lakehouse as the destination.

You need to batch ingest only rows from the data source where the City attribute has a value of Kansas. The filter must be added before the destination. The solution must minimize development effort.

What should you use for the data processor and filtering? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

## Answer Area

Data processor:

- A data pipeline
- A Dataflow Gen2 dataflow
- An eventstream with a custom endpoint
- An eventstream with an external data source

Filtering:

- A Filter activity in a data pipeline
- A filter in a Dataflow Gen2 dataflow
- A KQL statement
- An eventstream processor

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

## Answer Area

Data processor:

- A data pipeline
- A Dataflow Gen2 dataflow
- An eventstream with a custom endpoint
- An eventstream with an external data source

Filtering:

- A Filter activity in a data pipeline
- A filter in a Dataflow Gen2 dataflow
- A KQL statement
- An eventstream processor

### NEW QUESTION 91

- (Topic 3)

You are building a Fabric notebook named MasterNotebook1 in a workspace. MasterNotebook1 contains the following code.

```
DAG = {
  "activities": [
    {
      "name": "execute_notebook_1",
      "path": "notebook_01",
      "timeoutPerCellInSeconds": 600,
      "args": {
        "input_value": "999"
      },
      "retry": 1,
      "retryIntervalInSeconds": 30
    },
    {
      "name": "execute_notebook_2",
      "path": "notebook_02",
      "timeoutPerCellInSeconds": 400,
      "args": {
        "input_value": "888"
      },
      "retry": 1,
      "retryIntervalInSeconds": 30
    },
    {
      "name": "execute_notebook_3",
      "path": "notebook_03",
      "timeoutPerCellInSeconds": 600,
      "args": {
        "input_value": "777"
      },
      "retry": 1,
      "retryIntervalInSeconds": 30
    }
  ],
  "timeoutInSeconds": 43200,
  "concurrency": 0
}
```

You need to ensure that the notebooks are executed in the following sequence:

- \* 1. Notebook\_03
- \* 2. Notebook\_01
- \* 3. Notebook\_02

Which two actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. Split the Directed Acyclic Graph (DAG) definition into three separate definitions.
- B. Change the concurrency to 3.
- C. Move the declaration of Notebook\_03 to the top of the Directed Acyclic Graph (DAG) definition.
- D. Move the declaration of Notebook\_02 to the bottom of the Directed Acyclic Graph (DAG) definition.
- E. Add dependencies to the execution of Notebook\_02.
- F. Add dependencies to the execution of Notebook\_03.

**Answer:** CE

**NEW QUESTION 92**

DRAG DROP - (Topic 3)

Your company has a team of developers. The team creates Python libraries of reusable code that is used to transform data.

You create a Fabric workspace name Workspace1 that will be used to develop extract, transform, and load (ETL) solutions by using notebooks.

You need to ensure that the libraries are available by default to new notebooks in Workspace1.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

**Actions**

- Change the runtime version.
- Install the libraries.
- Create a pool.
- Create an environment.
- Set the default environment.

**Answer Area**

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

**Actions**

- Change the runtime version.
- Install the libraries.
- Create a pool.
- Create an environment.
- Set the default environment.

**Answer Area**

Create an environment.

Install the libraries.

Set the default environment.

**NEW QUESTION 97**

HOTSPOT - (Topic 3)

You have a Fabric warehouse named DW1 that contains four staging tables named ProductCategory, ProductSubcategory, Product, and SalesOrder.

ProductCategory, ProductSubcategory, and Product are used often in analytical queries.

You need to implement a star schema for DW1. The solution must minimize development effort.

Which design approach should you use? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

ProductCategory, ProductSubcategory and Product must be:

- Denormalized into a single product dimension table
- Added to the model as individual tables
- Denormalized by being added to the SalesOrder table
- Denormalized into a single product dimension table

The joining key must be:

- the unique system generated identifier
- The product name and the date
- the unique system generated identifier
- The product category name

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

ProductCategory, ProductSubcategory and Product must be:

- Denormalized into a single product dimension table
- Added to the model as individual tables
- Denormalized by being added to the SalesOrder table
- Denormalized into a single product dimension table

The joining key must be:

- the unique system generated identifier
- The product name and the date
- the unique system generated identifier
- The product category name

**NEW QUESTION 99**

- (Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Fabric eventstream that loads data into a table named Bike\_Location in a KQL database. The table contains the following columns:

BikepointID Street Neighbourhood No\_Bikes No\_Empty\_Docks

Timestamp

You need to apply transformation and filter logic to prepare the data for consumption. The solution must return data for a neighbourhood named Sands End when No\_Bikes is at least 15. The results must be ordered by No\_Bikes in ascending order.

Solution: You use the following code segment:

```
SELECT BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
FROM bike_location
WHERE neighbourhood = 'Sands End'
AND no_bikes >= 15
ORDER BY no_bikes
```

Does this meet the goal?

- A. Yes
- B. no

Answer: B

Explanation:

This code does not meet the goal because this is an SQL-like query and cannot be executed in KQL, which is required for the database.

Correct code should look like:

```
bike_location
| filter Neighbourhood == "Sands End" and No_Bikes >= 15
| sort by No_Bikes asc
| project BikepointID, Street, Neighbourhood, No_Bikes, No_Empty_Docks, Timestamp
```

**NEW QUESTION 103**

HOTSPOT - (Topic 3)

Your company has three newly created data engineering teams named Team1, Team2, and Team3 that plan to use Fabric. The teams have the following personas:

- Team1 consists of members who currently use Microsoft Power BI. The team wants to transform data by using by a low-code approach.
- Team2 consists of members that have a background in Python programming. The team wants to use PySpark code to transform data.
- Team3 consists of members who currently use Azure Data Factory. The team wants to move data between source and sink environments by using the least amount of effort.

You need to recommend tools for the teams based on their current personas.

What should you recommend for each team? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

**Answer Area**

Team1:

Team2:


Team3:

- A. Mastered
- B. Not Mastered

**Answer:** A

**Explanation:**

**Answer Area**

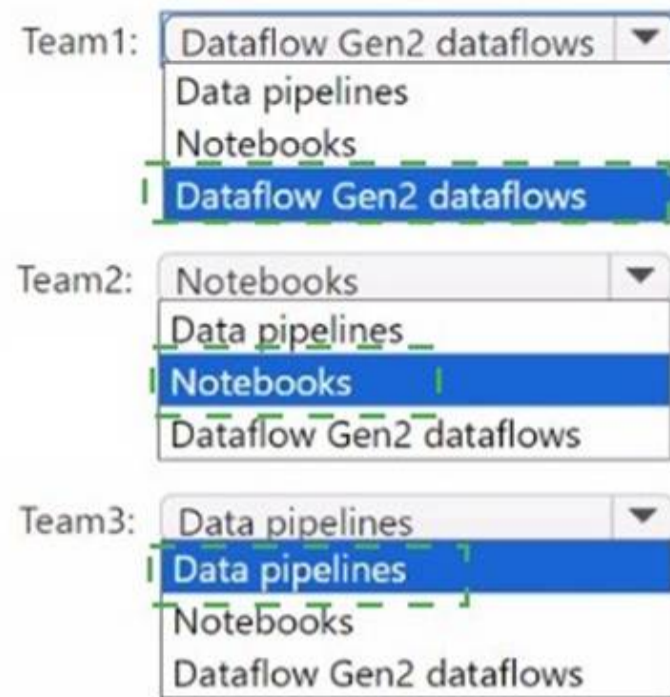

**NEW QUESTION 106**

- (Topic 3)

You have a Fabric workspace that contains a lakehouse and a notebook named Notebook1. Notebook1 reads data into a DataFrame from a table named Table1 and applies transformation logic. The data from the DataFrame is then written to a new Delta table named Table2 by using a merge operation. You need to consolidate the underlying Parquet files in Table1. Which command should you run?

- A. VACUUM
- B. BROADCAST
- C. OPTIMIZE
- D. CACHE

**Answer: C**


**Explanation:**

To consolidate the underlying Parquet files in Table1 and improve query performance by optimizing the data layout, you should use the OPTIMIZE command in Delta Lake. The OPTIMIZE command coalesces smaller files into larger ones and reorganizes the data for more efficient reads. This is particularly useful when working with large datasets in Delta tables, as it helps reduce the number of files and improves performance for subsequent queries or operations like MERGE.

**NEW QUESTION 111**

- (Topic 3)

Exhibit.

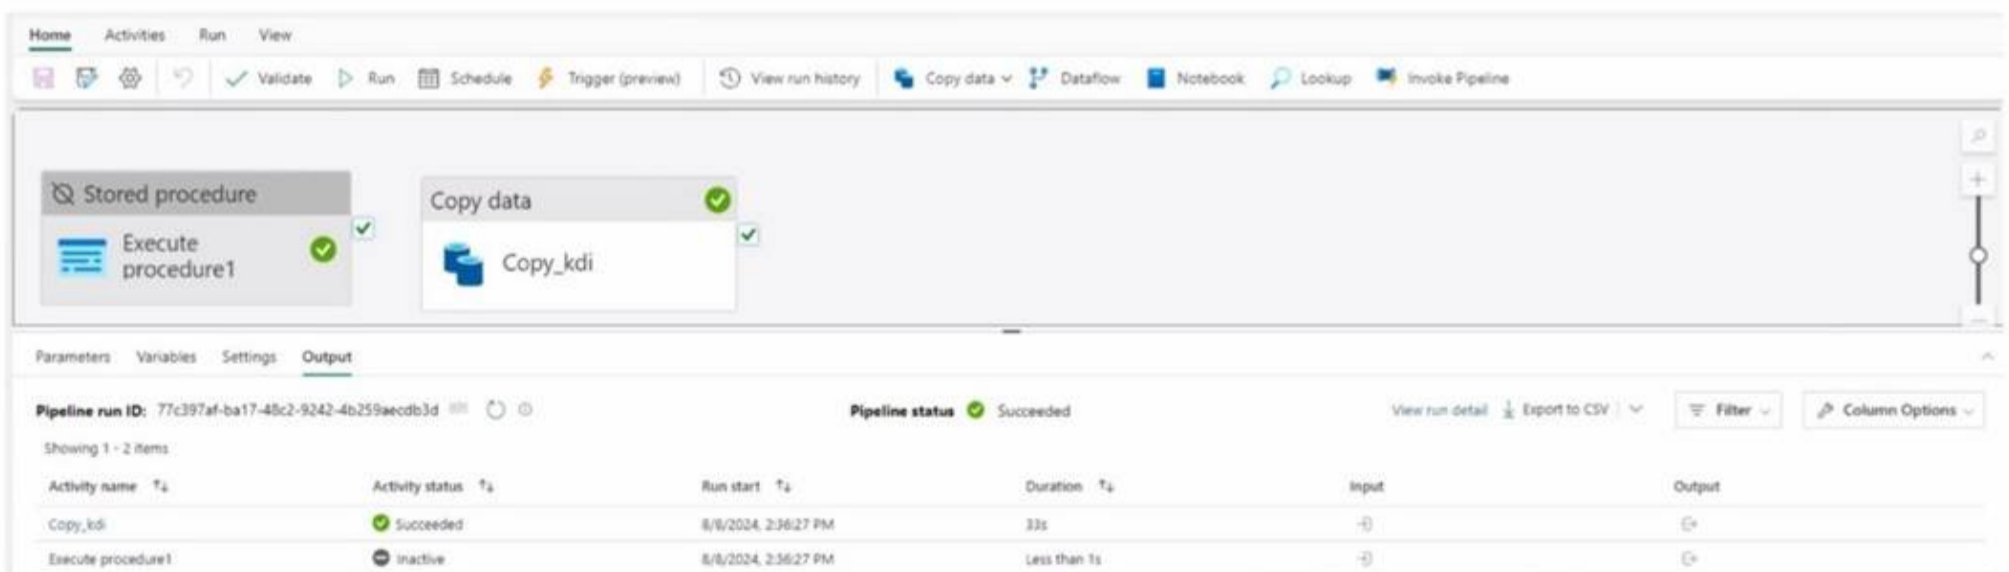

You have a Fabric workspace that contains a write-intensive warehouse named DW1. DW1 stores staging tables that are used to load a dimensional model. The tables are often read once, dropped, and then recreated to process new data. You need to minimize the load time of DW1. What should you do?

- A. Disable V-Order.
- B. Drop statistics.
- C. Enable V-O-der.
- D. Create statistics.

**Answer: C**

**NEW QUESTION 112**

- (Topic 3)

You have a Fabric workspace that contains an eventstream named Eventstream1. Eventstream1 processes data from a thermal sensor by using event stream processing, and then stores the data in a lakehouse.

You need to modify Eventstream1 to include the standard deviation of the temperature. Which transform operator should you include in the Eventstream1 logic?

- A. Expand
- B. Group by
- C. Union
- D. Aggregate

**Answer:** D

**Explanation:**

To compute the standard deviation of the temperature from the thermal sensor data, you would use the Aggregate transform operator in Eventstream1. The Aggregate operator allows you to apply functions like sum, average, count, and statistical functions like standard deviation across a group of rows or events. This operator is ideal for operations that require summarizing or computing statistics over a dataset, such as calculating the standard deviation.

**NEW QUESTION 116**

.....

## **Thank You for Trying Our Product**

### **We offer two products:**

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

### **DP-700 Practice Exam Features:**

- \* DP-700 Questions and Answers Updated Frequently
- \* DP-700 Practice Questions Verified by Expert Senior Certified Staff
- \* DP-700 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- \* DP-700 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

**100% Actual & Verified — Instant Download, Please Click**  
**[Order The DP-700 Practice Test Here](#)**