

70-779 Dumps

Analyzing and Visualizing Data with Microsoft Excel (beta)

<https://www.certleader.com/70-779-dumps.html>



NEW QUESTION 1

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a query named Query1 that retrieves the user information from two Excel files. One of the Excel files does not contain location information. A sample of the data retrieved by the query is shown in the following table.

UserName	UserId	Location
User1	1001	<i>null</i>
User1	1001	Seattle
User2	1002	<i>null</i>
User2	1002	Seattle
User3	1003	Montreal
User4	1004	<i>null</i>

You need to ensure that values in UserName are unique. The solution must ensure that the locations are retained. A sample of desired output is shown in the following table.

UserName	UserId	Location
User1	1001	Seattle
User2	1002	Seattle
User3	1003	Montreal
User4	1004	<i>null</i>
User5	1005	<i>null</i>


Solution: You select the UserName and Location columns, and then you click Keep Duplicates. Does this meet the goal?

- A. Yes
- B. No


Answer: B

NEW QUESTION 2

You have the data model shown in the Data Model exhibit. (Click the Exhibit button.)

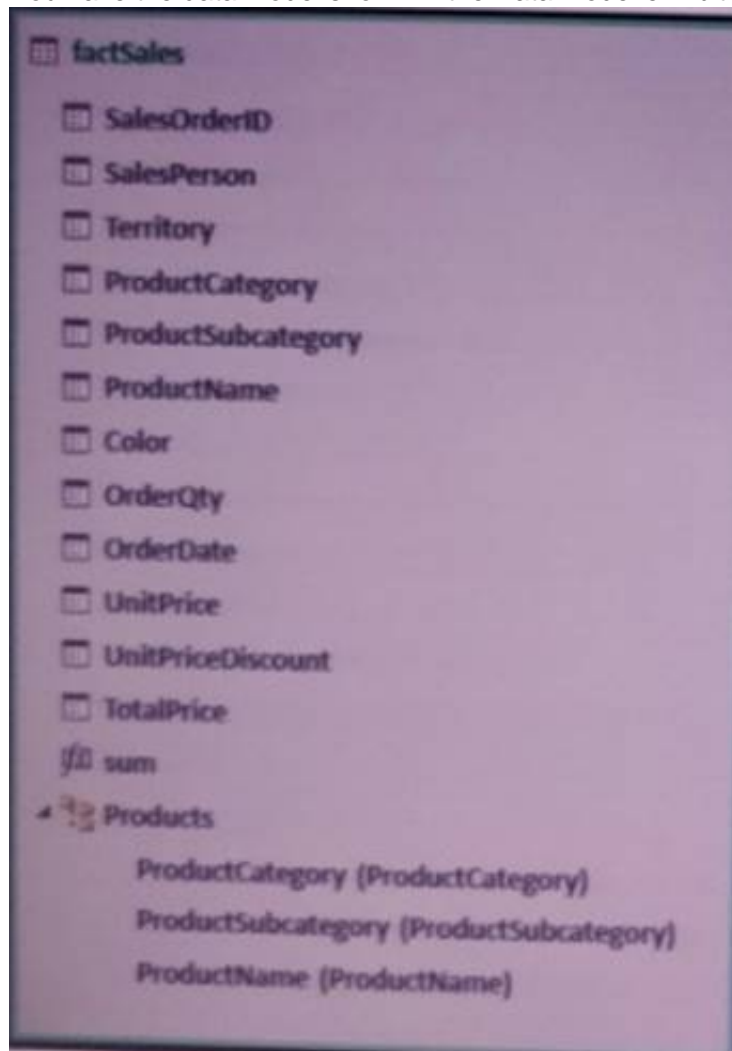

You have the PivotChart shown in the Pivot Chart exhibit. (Click the Exhibit button.)

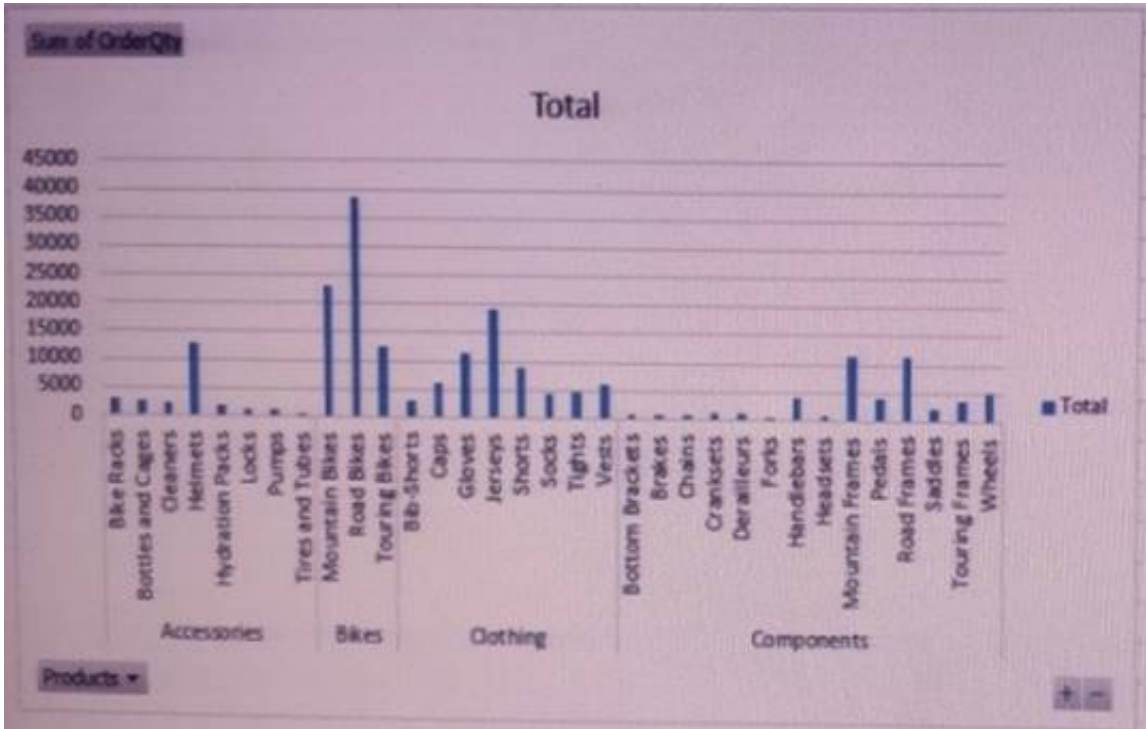

You need to change the current view of the PivotChart to display ProductCategory only. What should you do?

- A. Double-click a bar in the PivotChart.
- B. Click the - button.
- C. Right-click the PivotChart and click Reset to Match Style
- D. Right-click a bar in the PivotChart and click Expand Entire Field.

Answer: D

NEW QUESTION 3

You have multiple workbook queries that load data from tables in Microsoft Azure SQL Database to a Power Pivot data model. You discover that new rows were added to the tables in Azure SQL Database. You need to ensure that the workbook has the new data. Why should you do?


- A. Select a cell in the worksheet and pressF5.
- B. From the data tab, click Refresh All.
- C. Close and open the workbook.
- D. From the Power Pivot tab, click Update All.

Answer: B

Explanation:

Refresh data from a Microsoft Query, the Data Connection Wizard, or web query

- ▶ Click any cell in the range or table that contains the link to the external data.
- ▶ On the Data tab, in the Connections group, click Refresh All.

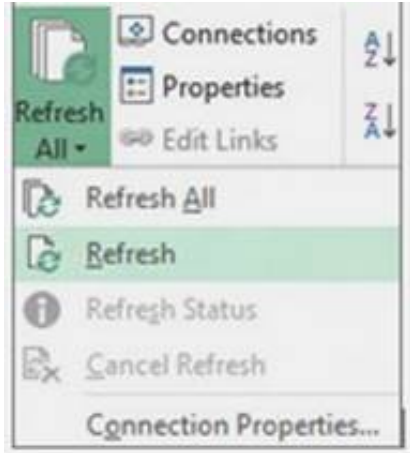


- ▶ To update only the selected data, click Refresh.
- You can also right-click a cell in the range or table, and then click Refresh.
- ▶ To update all the data connections in the workbook, click Refresh All.

Note: If you have more than one workbook open, you'll need to repeat the operation in each workbook. <https://support.office.com/en-us/article/refresh-an-external-data-connection-in-excel-2016-for-windows-152417>

NEW QUESTION 4

You need to create a PivotChart that has a filter as shown in the following exhibit.

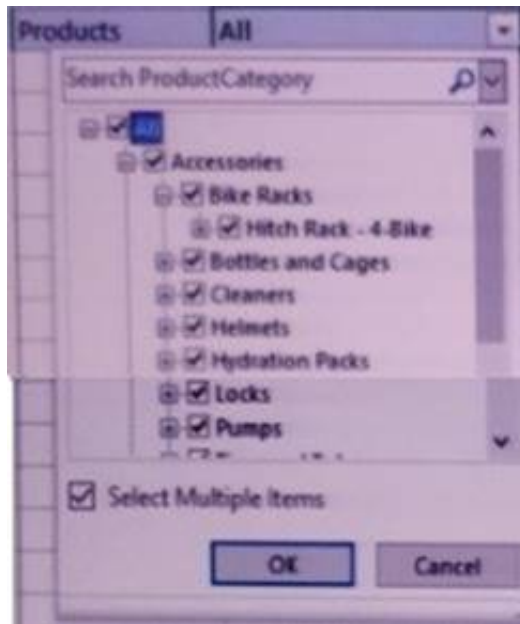

What should you do first?

- A. From the model, create a measure.
- B. From Query Editor, create a function.
- C. From Query Editor, create a parameter.
- D. From the model, create a hierarchy.

Answer: A

Explanation:

References:

<https://support.office.com/en-us/article/measures-in-power-pivot-86484821-a324-4da3-803b-82fd2e5033f4>

NEW QUESTION 5

You import the data from two next files into a PowerPivot model to create two tables named Customers and Invoices. Each table contains a column named CustomerID.

When you attempt to create a relationship between the Customers table and the Invoices table by using the CustomerID column from each table, the relationship cannot be created due to duplicate CustomerID values.

You need to ensure that you can create the relationship. What should you do?

- A. Add an index column to the Customers query
- B. Add an index column to the Invoices query
- C. Group the Customers query by CustomerID
- D. Sort the Invoices query by CustomerID, and then add a Fill Down step

Answer: C

NEW QUESTION 6

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result these questions will not appear in the review screen.

Your company has sales offices in several cities.

You create a table that represents the amount of sales in each city by month as shown in the exhibit.

	A	B	C	D	E	F	G	H
1	City	January	February	March	April	May	June	July
2	Montreal	20.00	90.00	170.00	200.00	200.00	400.00	420.00
3	Toronto	0.00	30.00	75.00	60.00	85.00	190.00	203.00
4	Miami	0.00	25.00	105.00	75.00	70.00	155.00	140.00
5	Madrid	220.00	440.00	650.00	610.00	424.00	500.00	542.00
6	Los Angeles	0.00	10.00	25.00	55.00	40.00	45.00	75.00
7	Brussels	3,400.00	3,000.00	3,300.00	3,700.00	2,300.00	2,700.00	2,340.00
8	Antwerp	2,500.00	2,350.00	2,300.00	2,400.00	1,800.00	1,970.00	1,690.00
9	Tel Aviv	100.00	150.00	190.00	230.00	260.00	230.00	115.00
10	Melbourne	90.00	75.00	140.00	120.00	110.00	175.00	65.00

You need to ensure that all values lower than 250 display a red icon. The solution must ensure that all values greater than 500 display a green icon.

Solution: You modify the conditional formatting rule, and then set a new value for the yellow icon. Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 7

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have the following data.

OrderDate	OrderNumber	ProductName	OrderQuantity
1/28/2018	998989	Product1	10
1/28/2018	998990	Product1	22
1/28/2018	998991	Product2	21
1/29/2018	998992	Product3	43
1/29/2018	998993	Product2	56
1/29/2018	998994	Product3	12

You need to retrieve a list of the unique ProductName entries.

Solution: Open the Advanced Filter dialog box, select Filter the list, in-place, and then select Unique records only.

Does this meet the goal?

- A. Yes
- B. No

Answer: A

NEW QUESTION 8

You are building a KPI.

You need to configure the KPI to display a red icon when the sales from a month is less than nine percent of the sales from the last 12 months.

What should you use to define the target value?

- A. an absolute value
- B. a calculated column
- C. a calculated field
- D. a measure

Answer: A

Explanation:

[https://msdn.microsoft.com/en-us/library/hh272049\(v=sql.110\).aspx](https://msdn.microsoft.com/en-us/library/hh272049(v=sql.110).aspx)

NEW QUESTION 9

Note: This question is part of a series of questions that use the same scenario, For your convenience is repeated in each question. Each question presents a different goal and answer choices, but the text of the scenario is the same in each question in this series.

Start of repeated scenario

You have six workbook queries that each extracts a table from a Microsoft Azure SQL database. The tables are loaded to the data model, but the data is not loaded to any worksheets. The data model is shown in the Data Model exhibit.

Your company has 100 product subcategories and more than 10,000 products. End of repeated scenario.

You need to create a measure named [Sales Monthly RT] that calculates a running total of [Sales] for each date within a month as shown in the following exhibit.

Row Labels	Sales	Sales Monthly RT
Apr '07		
01/04/2007	£8,773,593.09	£8,773,593.09
02/04/2007	£9,030,228.76	£17,803,821.85
03/04/2007	£9,135,385.65	£26,939,207.50
04/04/2007	£9,177,288.60	£36,116,496.10
05/04/2007	£8,514,020.44	£44,630,516.55
06/04/2007	£9,034,284.95	£53,664,801.50
07/04/2007	£9,342,592.99	£63,007,394.49
08/04/2007	£9,235,335.83	£72,242,730.32
09/04/2007	£8,959,572.36	£81,202,302.68
10/04/2007	£9,165,525.72	£90,367,828.40

How should you complete the DAX formula? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

CALCULATE
SUM
SUMMARIZE
SUMX

DATEADD
DATESBETWEEN
DATESMTD
PARALLELPERIOD

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

SUM [Sales], DATESMTD

The following sample formula creates a measure that calculates the 'Month To Date Total' for the Internet sales.

To see how this works, create a PivotTable and add the fields, CalendarYear, MonthNumberOfYear and

DayNumberOfMonth, to the Row Labels

area of the PivotTable. Then add a measure, namedMonth To Date

Total, using the formula defined in the code section, to the Values

area of the PivotTable.

=CALCULATE(SUM(InternetSales_USD[SalesAmount_USD]), DATESMTD(DateTime[DateKey])) <https://msdn.microsoft.com/en-us/query-bi/dax/datesmtd-function-dax>

NEW QUESTION 10

You have the following table.

Month Number	Month Name
1	January
2	February
3	March
4	April
5	May
6	June
7	July
8	August
9	September
10	October
11	November
12	December

You plan to use [Month Name] as the axis in a PivotChart.

You need to ensure that whenever [Month Name] is used in a chart, the months are displayed chronologically by default.

What should you do?

- A. Sort the [Month Name] column by [Month Name].
- B. Change the Data Type of [Month Name] to Date.
- C. Sort the [Month Name] column by [Month Name].
- D. Add a calculated column named [ID] that use the [Month Name] & [Month Number] DAX formula

Answer: D

Explanation:

References:


<https://gasperkamensek.wordpress.com/2013/04/16/sorting-months-chronologically-and-not-alphabetically-in-a->

NEW QUESTION 10

Note: This question is part of a series of questions that use the same scenario. For your convenience, the scenario is repeated in each question. Each question presents a different goal and answer choices, but the text of the scenario is the same in each question in this series.

Start of repeated scenario

You have six workbook queries that each extracts a table from a Microsoft Azure SQL database. The tables are loaded to the data model, but the data is not loaded to any worksheets. The data model is shown in the Data Model exhibit.

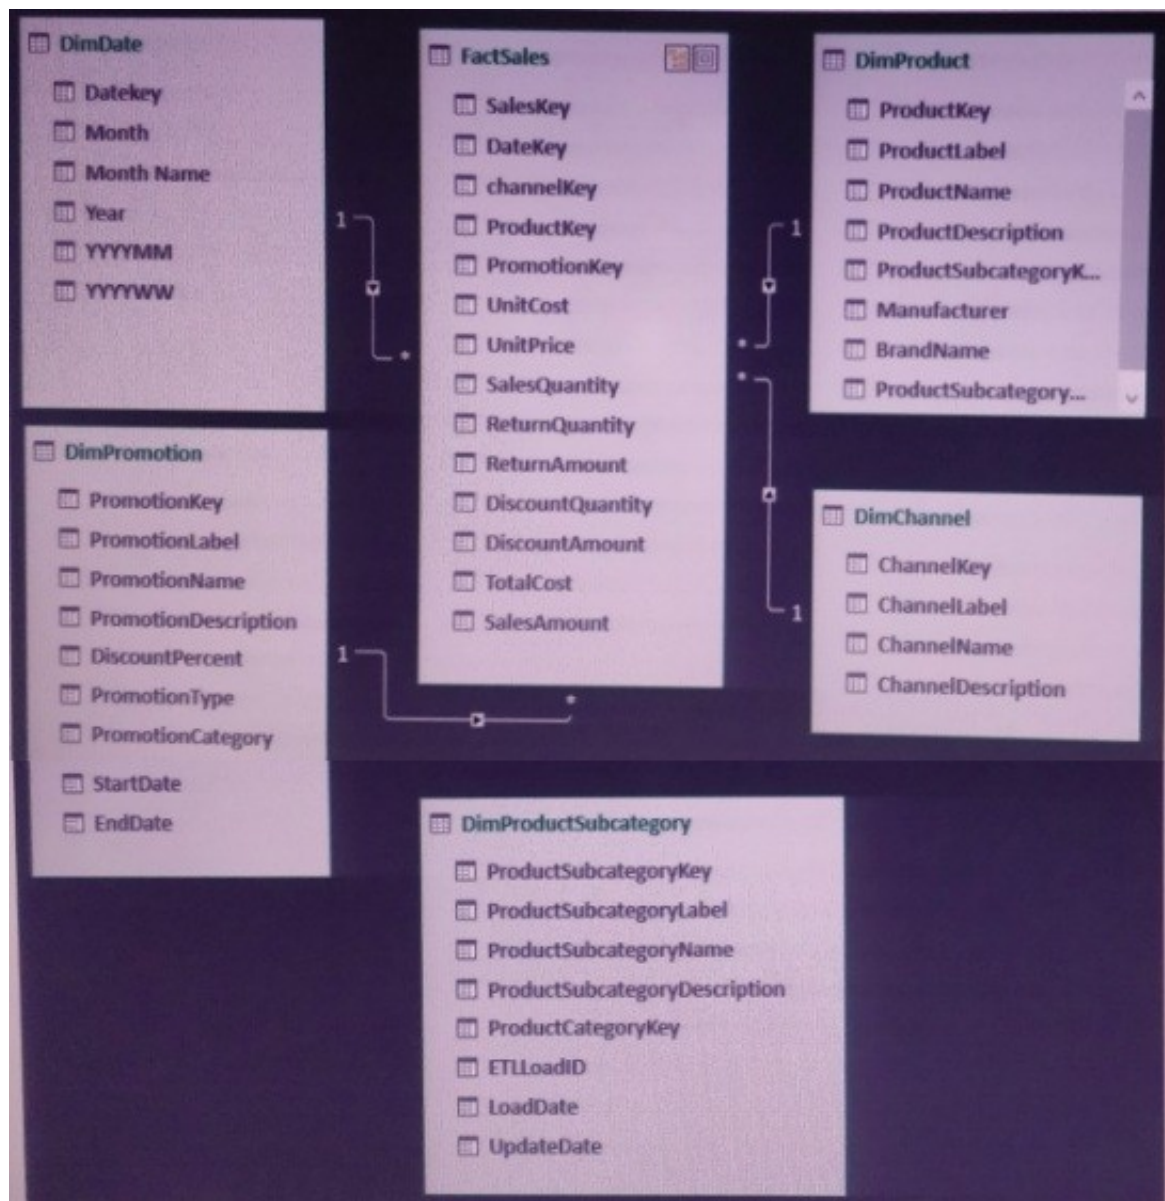

Your company has 100 product subcategories and more than 10,000 products. End of repeated scenario.
You need to create a simplified view of the workbook for some users. The simplified view must only display data from FactSales, DimProduct, and DimDate.
What should you do in the data model?

- A. Click Hide from Client Tolls for all the tables except FactSales, DimProduct, and DimDate.
- B. Create a new perspective.
- C. Modify the Table Behavior settings for FactSales, DimProduct, and DimDate.
- D. Add the columns from FactSales, DimProduct, and DimDate to the Default Field Set.

Answer: A


NEW QUESTION 11

Note: This question is part of a series of questions that use the same scenario. For your convenience, the scenario is repeated in each question. Each question presents a different goal and answer choices, but the text of the scenario is the same in each question in this series.

Start of repeated scenario

You have six workbook queries that each extracts a table from a Microsoft Azure SQL database. The tables are loaded to the data model, but the data is not loaded to any worksheet. The data model is shown in the Data Model exhibit. (Click the Exhibit button.)


Your company has 100 product subcategories and more than 10,000 products.

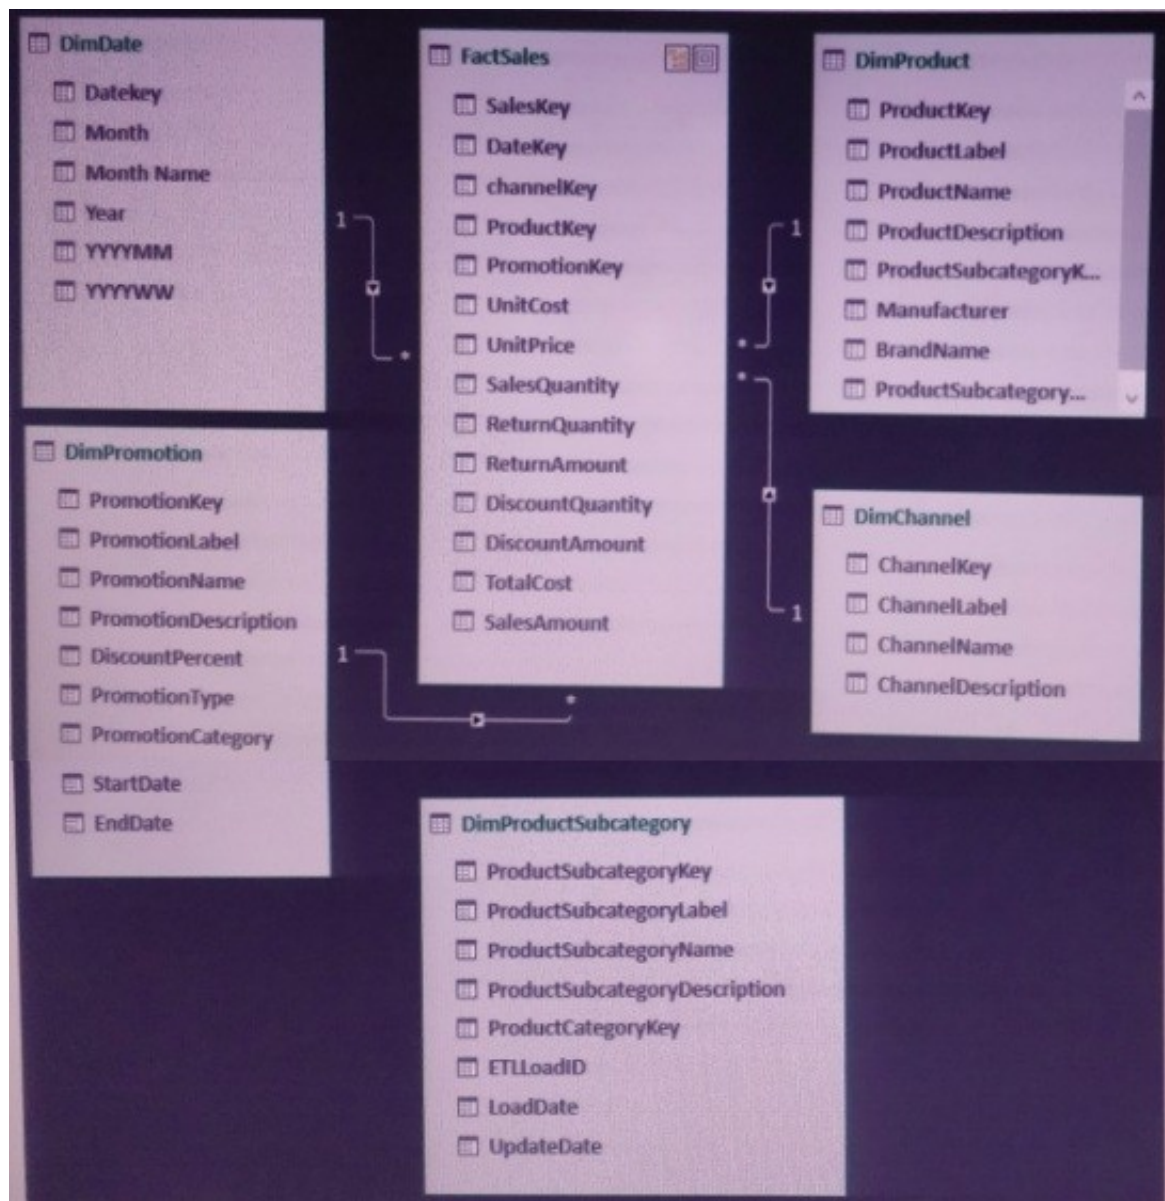

End of repeated scenario.

You need to create a measure named [Sales Monthly RT] that calculates a running total of [Sales] for each date within a month as shown in the following exhibit.

Row Labels	Sales	Sales Monthly RT
Apr '07		
01/04/2007	£8,773,593.09	£8,773,593.09
02/04/2007	£9,030,228.76	£17,803,821.85
03/04/2007	£9,135,385.65	£26,939,207.50
04/04/2007	£9,177,288.60	£36,116,496.10
05/04/2007	£8,514,020.44	£44,630,516.55
06/04/2007	£9,034,284.95	£53,664,801.50
07/04/2007	£9,342,592.99	£63,007,394.49
08/04/2007	£9,235,335.83	£72,242,730.32
09/04/2007	£8,959,572.36	£81,202,302.61
10/04/2007	£9,165,525.72	£90,367,828.41

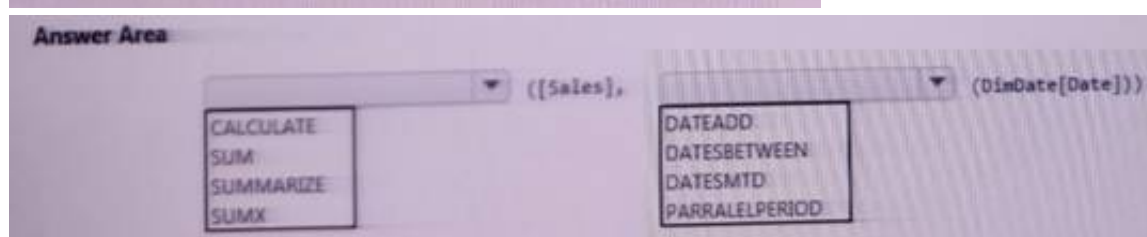

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

SUM([Sales],DATESMTD(DimDate[Date])) CALCULATE(SUM([Sales],DATESMTD(DimDate[Date])))

NEW QUESTION 16

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Power Pivot model that contains the following tables.?

Table name	Column name
Products	ProductID
	ProductName
	Price
	ProductCategoryID
ProductCategory	ProductCategoryID
	ProductCategoryName

There is a relationship between Products and ProductCategory.

You need to create a hierarchy in Products that contains ProductCategoryName and ProductName. Solution: You create a measure that uses the USERELATIONSHIP DAX function.

Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 17

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result these questions will not appear in the review screen.

You have two Microsoft SQL Server database servers named Production1 and Test1. Production1 contains the same tables as Test1, but only a subset of the data.

You add Test1 as a data source, and you select 10 tables. You configure several transformations. You need to connect the model to the tables in Production1. The solution must maintain the existing transformations.

Solution: From Query Editor, you edit the source of each table query. Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 21

You have the PivotTable shown in the following exhibit.

LineTotal	All
Row Labels	Sum of LineTotal
AWC Logo Cap	61.63623912
Bike Wash - Dissolver	71.96453572
Chain	48.576
Classic Vest, M	431.8
Classic Vest, S	602.90075
Front Brakes	219.0857142
Front Derailleur	237.874
Half-Finger Gloves, L	186.124
Half-Finger Gloves, M	127.348
Half-Finger Gloves, S	117.552
Hitch Rack - 4-Bike	576
HL Bottom Bracket	546.705
HL Crankset	1457.964
Grand Total	4685.530239

You need to display only rows in the PivotTable in which the sum of LineTotal is greater than 100. What should you do?

- A. From Row Label, configure a Label filter.
- B. Add a slicer for LineTotal and select the values from the slicer.
- C. From Row Label, configure a Value Filter.
- D. Add LineTotal to the Filters area of PivotTable Field
- E. Configure the Filters value.

Answer: B

NEW QUESTION 23

Note: This question is part of a series of questions that use the same scenario. For your convenience, the scenario is repeated in each question. Each question presents a different goal and answer choices, but the text of the scenario is the same in each question in this series.

Start of repeated scenario.

You are creating reports for a car repair company. You have four datasets in Excel spreadsheets. Four workbook queries load the datasets to a data model. A sample of the data is shown in the Data Sample exhibit. (Click the Exhibit button.)

Data Sample exhibit:


Date	WorkshopID	RepairTypeID	Hours	Revenue
2016-10-01	1	4	2	£ 432
2016-10-01	6	8	16	£ 4,144
2016-10-01	3	6	12	£ 564
2016-10-01	6	5	4	£ 1,680
2016-10-01	5	4	12	£ 1,968
2016-10-01	3	4	14	£ 854
2016-10-01	2	4	15	£ 3,010
2016-10-01	1	1	0	£ -

ID	Workshop Name	Workshop Manager	Manager Since	IsLatest
1	Cambridge	Alex Hankin	2015-01-01	1
2	Bedford	Ben Miller	2015-01-01	1
3	Camden	Karl Furze	2015-01-01	1
4	Belsize	Ron Gabel	2015-01-01	1
5	Reading	Josh Edwards	2015-01-01	1
6	Kilburn	Karen Toh	2015-01-01	1
6	Kilburn	Eva Corets	2015-01-01	0

ID	Date	Month	Year	MonthID
20160101	2016-01-01	Jan '16	2016	201601
20160102	2016-01-02	Jan '16	2016	201601
20160103	2016-01-03	Jan '16	2016	201601
20160104	2016-01-04	Jan '16	2016	201601
20160105	2016-01-05	Jan '16	2016	201601
20160106	2016-01-06	Jan '16	2016	201601
20160107	2016-01-07	Jan '16	2016	201601
20160108	2016-01-08	Jan '16	2016	201601
20160109	2016-01-09	Jan '16	2016	201601

ID	Repair Type
1	Engine
2	Radiator
3	Gearbox
4	Clutch
5	Brakes
6	Tires
7	Bodywork
8	Windscreen
9	Other

The data model is shown in the Data Model exhibit. (Click the Exhibit button.)

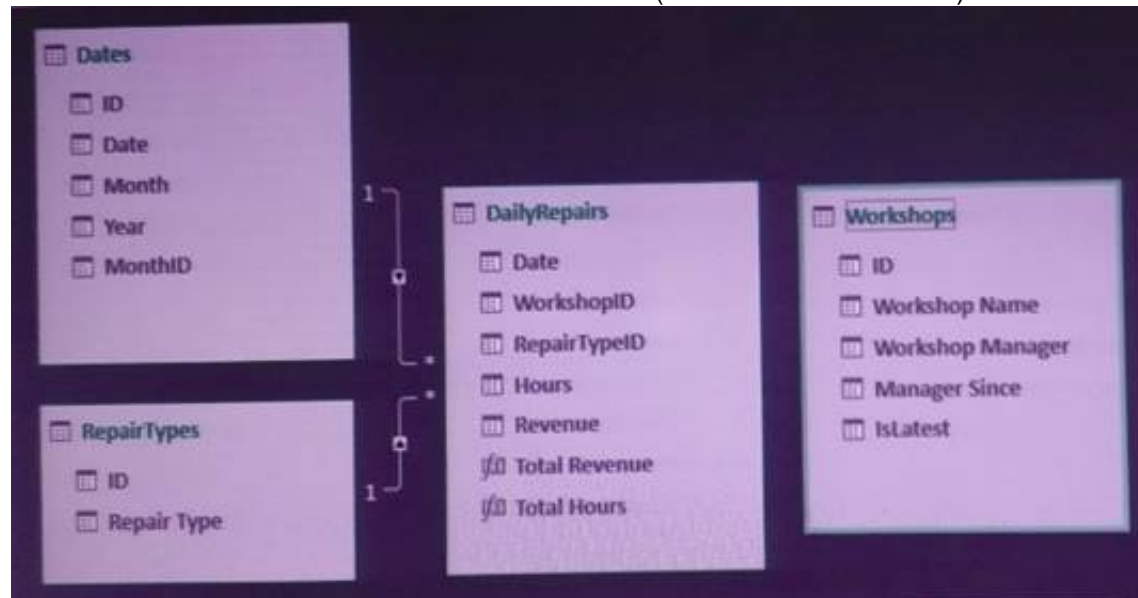

The tables in the model contain the following data:

- DailyRepairs has a log of hours and revenue for each day, workshop, and repair type. Every day, a log entry is created for each workshop, even if no hours or revenue are recorded for that day. Total Hours and Total Revenue column.
- Workshops have a list of all the workshops and the current and previous workshop managers. The format of the Workshop Manager column is always Firstname Lastname. A value of 1 in the IsLatest column indicates that the workshop manager listed in the record is the current workshop manager.
- RepairTypes has a list of all the repair types
- Dates has a list of dates from 2015 to 2018

End of repeated scenario.

You need to create a PivotChart that displays the month, the hours of the month, and the hours of the previous month, as shown in the following exhibit.

Row Labels	Total Hours	Total Hours Last Month
Oct '16	9,265	
Nov '16	9,152	9,265
Dec '16	9,196	9,152
Jan '17	9,392	9,196
Feb '17	8,809	9,392
Mar '17	7,585	8,809
Grand Total	53,399	53,399

Which DAX formula should you use for the Total Hours Last Month measure? To answer, drag the appropriate fields to the correct targets. Each value may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

VALUES

BLANK

CALCULATE

DATEADD

DATESBETWEEN

IF

NULL

-1

1

ANSWER AREA

Value

(ISBLANK([Total Hours]),

Value

([Total Hours],

Value

(tblDates[Date],

Value

(-1,MONTH)))

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

IF (ISBLANK([Total Hours]),BLANK(), CALCULATE([total Hours], DATEADD(tblDates(Date), -1,MONTH)))

NEW QUESTION 27

You have a workbook query that loads data from a table named Products. Products contains a column named InternalPrice that has a Data Type of Decimal. From Query Editor you create a custom column named ResellerPrice that uses a formula to multiply InternalPrice by 1.2, and then you remove the InternalPrice column. What will occur when you load the data to a worksheet?

- A. All the columns except InternalPrice will load to the worksheet The values in ResellerPrice will be correct.
- B. An error message will appear and all the data will fail to load.
- C. An error message will appear and all the columns except InternalPnce and ResellerPrice will load to the worksheet.
- D. All the columns except InternalPrice will load to the workshee
- E. The values in ResellerPrice will be null.

Answer: D

NEW QUESTION 32

You have a table named Date that contains the following data.

DateKey (Whole Number)	FullAlternateDateKey (Date)	MonthName (Text)
20050101	1/1/05	January
20050102	1/2/05	January
20050103	1/3/05	January
20050104	1/4/05	January

You have a table named Sales that contains the following data.

SalesOrderID (Whole Number)	OrderDate (Date)	PurchaseOrderNumber (Text)	AccountNumber (Text)
43659	5/31/11 12:00 AM	PO522145787	10-4020-000676
43660	5/31/11 12:00 AM	PO18850127500	10-4020-000117
43661	5/31/11 12:00 AM	PO18473189620	10-4020-000442
43662	5/31/11 12:00 AM	PO18444174044	10-4020-000227

You plan to create a PivotCharts that will be sliced by MonthName. You need to create a relationship between Sales and Date. Which columns should you use to create the relationship? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

DATE: DateKey SALES: OrderDate Refer below

<https://www.archerpoint.com/blog/Posts/creating-date-table-power-bi>


NEW QUESTION 35

Note: This question is part of a series of questions that use the same scenario, For your convenience is repeated in each question. Each question presents a

different goal and answer choices, but the text of the scenario is the same in each question in this series.


Start of repeated scenario

You have six workbook queries that each extracts a table from a Microsoft Azure SQL database. The tables are loaded to the data model, but the data is not loaded to any worksheets. The data model is shown in the Data Model exhibit.

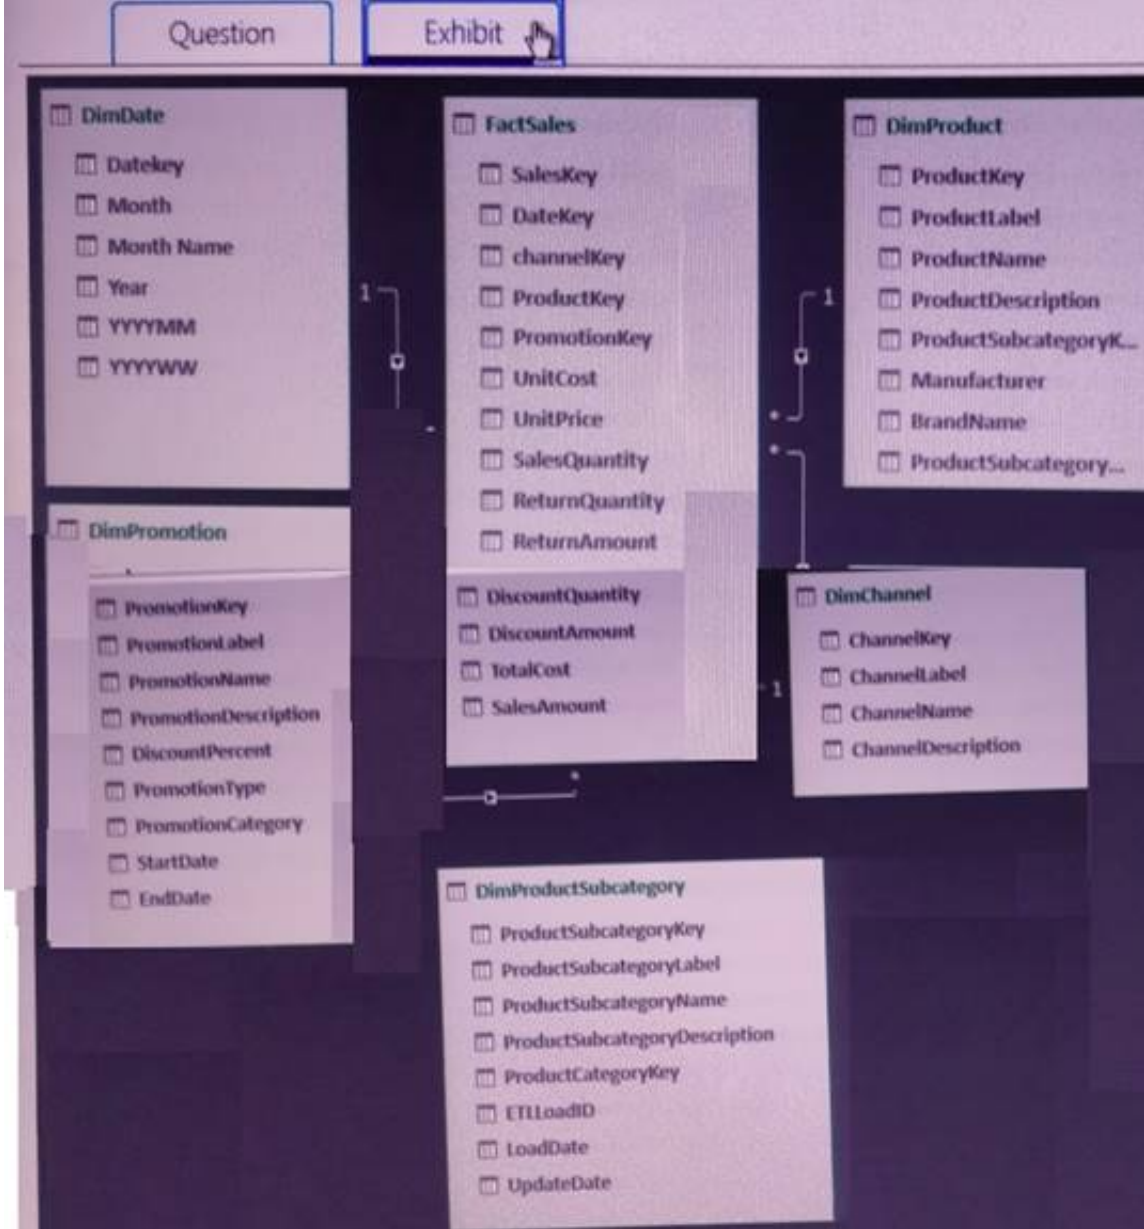

Your company has 100 product subcategories and more than 10,000 products. End of repeated scenario.

You need to create a chart as shown in the following exhibit.

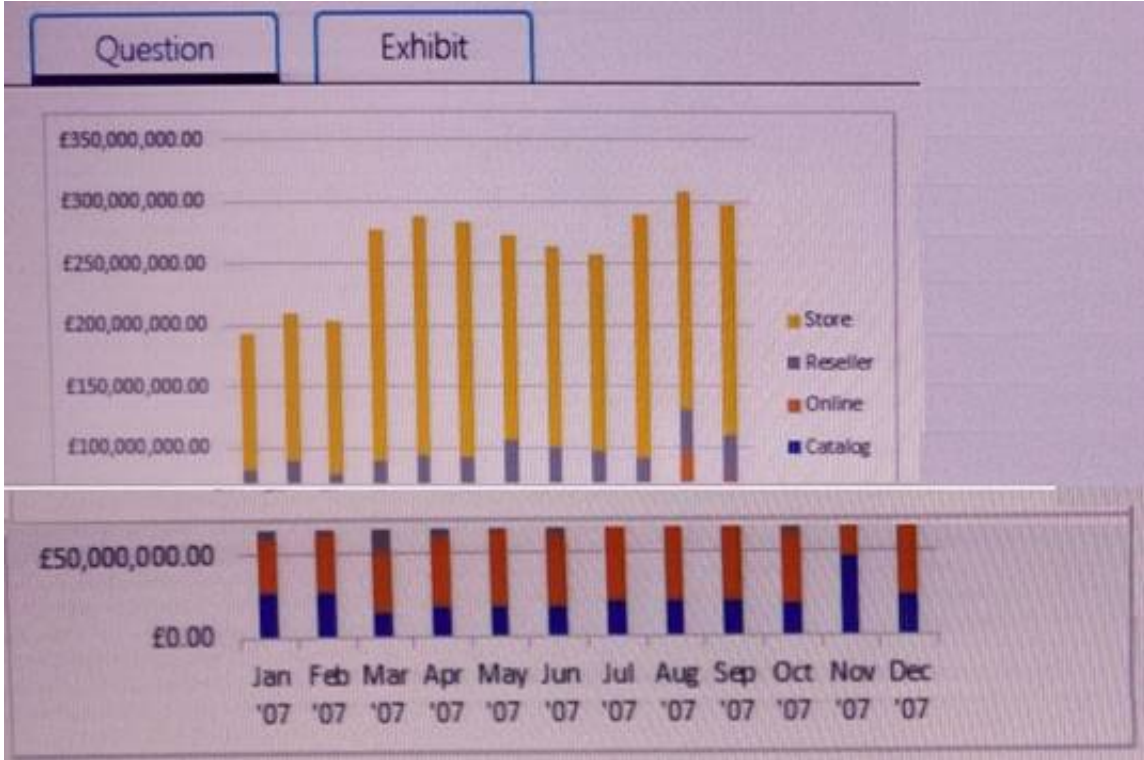

Which field should you use for each area? To answer, drag the appropriate fields to the correct areas. Each field may be used once, more than once, or not at all.

You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

The screenshot shows the Microsoft Excel Data Model interface. On the left is the Fields pane, which contains a list of fields: ChannelName, Month Year, SalesAmount, and Year. On the right is the Answer Area, which has three sections: Axis, Legend, and Values. Each section has a text box labeled "Field" for selecting a field from the Fields pane.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Axis: Month Year Legend: ChanelName Values: SalesAmount

NEW QUESTION 38

You have the following table.

Product	LineTotal
AWC Logo Cap	31.5
AWC Logo Cap	31.8
AWC Logo Cap	40.1
Bike Wash - Dissolver	35.98
Bike Wash - Dissolver	35.96
Bike Wash - Dissolver	35.77
Chain	24.28
Chain	24.28
Chain	24.28
Classic Vest, M	215.95
Classic Vest, M	220.99
Classic Vest, M	225.05

You need to create a PivotTable as shown in the following exhibit.

Row Labels	Total Sales	Biggest Sale
AWC Logo Cap	103.4	40.1
Bike Wash - Dissolver	107.71	35.98
Chain	72.84	24.28
Classic Vest, M	661.99	225.05
Grand Total	945.94	225.05

What should you do?

- A. Add Product to the Rows are
- B. Add LineTotal to the Values area twice.
- C. Add LineTotal to the Rows are
- D. Add Product to the Values area twice.
- E. Add Product to the Rows are
- F. Add LineTotal to the Columns area twice.
- G. Add LineTotal to the Rows are
- H. Add Product to the Values area twice.

Answer: B

NEW QUESTION 43

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have two Microsoft SQL Server database servers named Production1 and Test1. Production1 contains the same tables as Test1. but only a subset of the data.

You add Test1 as a data source, and you select 10 tables. You configure several transformations. You need to connect the model to the tables in Production1. The solution must maintain the existing transformations.

Solution You create a new connection to Production1, and then you import the tables. Does this meet the goal?

- A. yes
- B. No

Answer: B

NEW QUESTION 48


You create a new workbook and add a table to a data model. The data is shown in the following table.

Order Date	ProductID	UnitPrice
1/12/02 12:00 AM	500	\$809.76
2/20/02 12:00 AM	500	\$1,376.99
7/6/02 12:00 AM	501	\$158.43
2/18/02 12:00 AM	502	\$1,391.99
7/25/02 12:00 AM	503	\$48.59
5/16/02 12:00 AM	503	\$41.99
9/15/02 12:00 AM	504	\$323.99
9/17/02 12:00 AM	504	\$323.99

You need to create a visualization as shown in the following exhibit.

Row Labels	Average of Unit Price	Average of Unit Price Status
500	1093.375	
501	158.43	
502	1391.99	
503	45.29	
504	323.99	
Grand Total	559.46625	

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

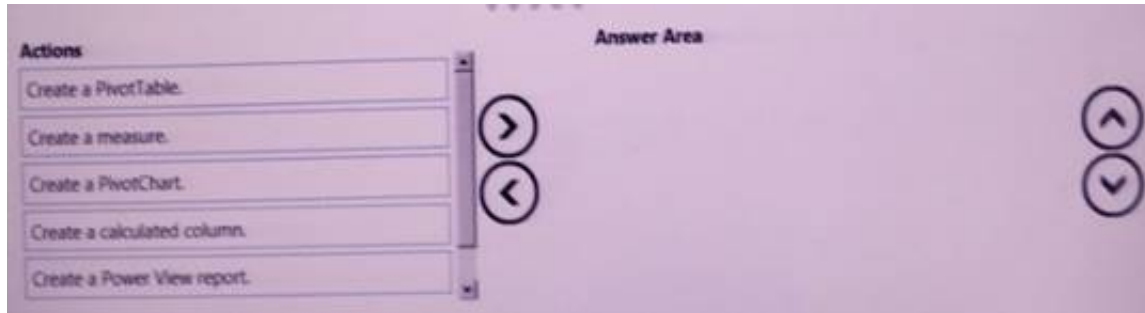

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Create a Pivot Table. Create a measure.
Create a Power View Report

NEW QUESTION 49

You have a workbook query that loads data from a table in a Microsoft Azure SQL database. The table has a column named LineTotal. The following is a sample of the data in LineTotal:

- 40
- 1
- 999
- 7658
- 883432

You need to ensure that when you load the data to the model, LineTotal is set as currency. What should you do from Query Editor?

- A. Configure the Data Type
- B. Round the column.
- C. Split the column by characters.
- D. Split the column by delimiter.

Answer: A

NEW QUESTION 50

You have a query that retrieves customers and their locations. You have sample of the data as shown in the following table.

Customer	Locations
Customer A	FL, TX
Customer B	CA, TX
Customer C	FL, TX, GA

Additional customers and locations are added frequently.

You need to transform the data as shown in the following table.

Customer	Locations
Customer A	FL
Customer A	TX
Customer B	CA
Customer B	TX
Customer C	FL
Customer C	TX
Customer C	GA

What should you do?

- A. Select the Locations columns and the select split column by delimit
- B. Use a comma as the delimiter and split into rows.
- C. Select the Customer columns, and then click Unpivot Columns.
- D. Select the Customer columns, and then click Unpivot other Columns.
- E. Select the Location columns and then select split column by delimit

F. Use a comma as the delimiter and split into columns.

Answer: A

NEW QUESTION 52

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Power Pivot model that contains the following tables.

Table name	Column name
Products	ProductID
	ProductName
	Price
	ProductCategoryID
ProductCategory	ProductCategoryID
	ProductCategoryName

There is a relationship between Products and ProductCategory.

You need to create a hierarchy in Products that contains ProductCategoryName and ProductName. Solution: You create a calculated column that uses the RELATED DAX function

Does this meet the goal?

A. Yes

B. No

Answer: A

Explanation:

References:

<https://www.mssqltips.com/sqlservertip/2900/creating-hierarchies-in-powerpivot-for-excel/> <https://msdn.microsoft.com/en-us/library/ee634202.aspx>

NEW QUESTION 56

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a query named Query1 that retrieves the user information from two Excel files. One of the Excel files does not contain location information. A sample of the data retrieved by the query is shown in the following table.

UserName	UserId	Location
User1	1001	<i>null</i>
User1	1001	Seattle
User2	1002	<i>null</i>
User2	1002	Seattle
User3	1003	Montreal
User4	1004	<i>null</i>

You need to ensure that values in UserName are unique. The solution must ensure that the locations are retained. A sample of desired output is shown in the following table.

UserName	UserId	Location
User1	1001	Seattle
User2	1002	Seattle
User3	1003	Montreal
User4	1004	<i>null</i>
User5	1005	<i>null</i>

Solution: You use the Group By function to group the rows by UserName and you specify output columns for UserID and Location by using the Max operation. Does this meet the goal?

A. Yes

B. No

Answer: B

NEW QUESTION 60

You have 20 workbook queries that load 20 CSV files to a local computer.

You plan to send the workbook and the 20 CSV files to several users. The users will store the files in various location.

You need to ensure that the users can change the path to the CSV files in the queries as quickly as possible. What should you do from Query Editor?

A. Merge all the querie

B. Edit the source of the first query.

C. Create a paramete

D. Modify the source of each query to use the parameter.

E. For each query, create a new query that uses a referenc

F. Modify the source of each new query.

- G. Append all the queries.
H. Edit the source of the first query.

Answer: B

Explanation:

<https://www.howtoexcel.org/power-query/how-to-parameterize-your-power-query/>

NEW QUESTION 65

You have a query that retrieves customers and their locations. You have a sample of the data as shown in the following table.

Customer	Locations
Customer A	FL, TX
Customer B	CA, TX
Customer C	FL, TX, GA

Additional customers and locations are added frequently.

You need to transform the data as shown in the following table.

Customer	Locations
Customer A	FL
Customer A	TX
Customer B	CA
Customer B	TX
Customer C	FL
Customer C	TX
Customer C	GA

What should you do?

- A. Select the Locations columns and then select Split Column by Delimited.
B. Use a comma as the delimiter and split into rows.
C. Select the Locations columns and then select Split Column by Delimited.
D. Use a comma as the delimiter and split into columns.
E. Select the Customer columns, and then click Unpivot Columns.
F. Select the Customer columns, and then click Unpivot Other Columns.

Answer: A

NEW QUESTION 69

You have a date column named [Date] in the format of mm-dd-yyyy.

You need to create a column named Quarter that displays the yearly quarter. A sample of the desired data is shown in the following table.

Date	Quarter
01-01-2017	Qtr 1
03-30-2017	Qtr 1
04-01-2017	Qtr 2
06-30-2017	Qtr 2
07-01-2017	Qtr 3
09-30-2017	Qtr 3
10-01-2017	Qtr 4
12-31-2017	Qtr 4

How should you complete the DAX formula? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

"Qtr " & ROUNDUP([Date] / ,0)

DATE
DATESMTD
MONTH
YEAR

3
4
12
52

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

MONTH3

="Qtr " & ROUNDUP(MONTH([Date])/3,0)

="Qtr " & ROUNDUP(MONTH([Date])/3,0)

<http://www.decisivedata.net/blog/quickly-create-week-month-quarter-and-year-fields-from-a-date-using-dax>

NEW QUESTION 74

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a Power Pivot model that contains the following tables.

Table name	Column name
Products	ProductID
	ProductName
	Price
	ProductCategoryID
ProductCategory	ProductCategoryID
	ProductCategoryName

There is a relationship between Products and ProductCategory.

You need to create a hierarchy in Products that contains ProductCategoryName and ProductName.

Solution: You create a measure that uses the ISCROSSFILTERED DAX function Does this meet the goal?

- A. Yes
- B. No

Answer: B


NEW QUESTION 78

Note: This question is part of a series of questions that use the same scenario. For your convenience, the scenario is repeated in each question. Each question presents a different goal and answer choices, but the text of the scenario is the same in each question in this series.

Start of repeated scenario.

You have six workbook queries that each extracts a table from a Microsoft Azure SQL database. The tables are loaded to the data model, but the data is not loaded to any worksheets. The data model is shown in the exhibit. (Click the Exhibit button.)

Exhibit:

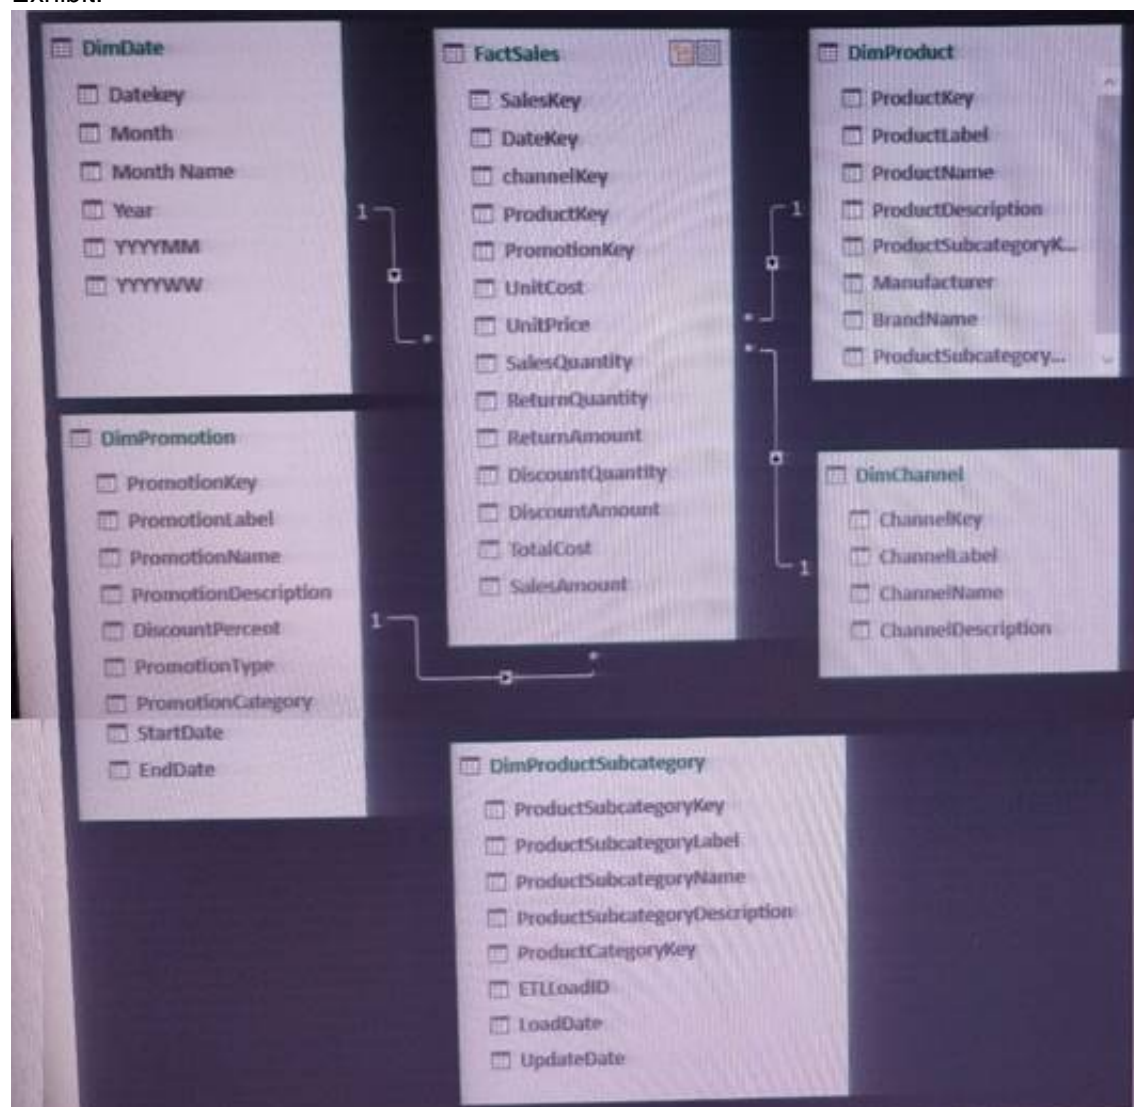

Your company has 100 product subcategories and more than 10,000 products. End of repeated scenario.

You need to create a chart as shown in the following exhibit.



Which type of chart should you use?

- A. Line with markers
- B. clustered column
- C. stacked column
- D. combo

Answer: D

Explanation:

<https://support.office.com/en-us/article/available-chart-types-in-office-a6187218-807e-4103-9e0a-27cdb19afb90>

NEW QUESTION 83

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 70-779 Exam with Our Prep Materials Via below:

<https://www.certleader.com/70-779-dumps.html>