

AZ-103 Dumps

Microsoft Azure Administrator

<https://www.certleader.com/AZ-103-dumps.html>



NEW QUESTION 1

You have an Azure subscription that contains 10 virtual machines.

You need to ensure that you receive an email message when any virtual machines are powered off, restarted, or deallocated.

What is the minimum number of rules and action groups that you require?

- A. three rules and three action groups
- B. one rule and one action group
- C. three rules and one action group
- D. one rule and three action groups

Answer: C

Explanation:

An action group is a collection of notification preferences defined by the user. Azure Monitor and Service

Health alerts are configured to use a specific action group when the alert is triggered. Various alerts may use the same action group or different action groups depending on the user's requirements. References: <https://docs.microsoft.com/en-us/azure/monitoring-and-diagnostics/monitoring-action-groups>

NEW QUESTION 2

You have an Azure subscription that contains two resource groups named RG1 and RG2. RG2 does not contain any resources. RG1 contains the resources in the following table.

Name	Type	Description	Lock
VNet1	Virtual network	A virtual network	ReadOnly
VNet3	Virtual network	A classic virtual network	None
W10	Virtual machine	A virtual machine that runs Windows 10 and is stopped and attached only to VNet1	Delete
W10_OsDisk	Disk	A managed SSD disk that is attached to W10	None

Which resource can you move to RG2?

- A. W10_OsDisk
- B. VNet1
- C. VNet3
- D. W10

Answer: B

Explanation:

When moving a virtual network, you must also move its dependent resources. For example, you must move gateways with the virtual network. VM W10, which is in Vnet1, is not a dependent resource. Incorrect Answers:

A: Managed disks don't support move.

C: Virtual networks (classic) can't be moved.

D: Virtual machines with the managed disks cannot be moved.

References: <https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-move-resources#virtual-machines-limitations>

NEW QUESTION 3

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the Subscriptions blade, you select the subscription, and then click Programmatic deployment.

Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 4

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1. Solution: From the RG1 blade, you click Deployments.

Does this meet the goal?

- A. Yes
- B. No

Answer: A

NEW QUESTION 5

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1.

Solution: From the Subscriptions blade, you select the subscription, and then click Resource providers.

Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 6

HOTSPOT

You have an Azure subscription named Subscription1.

In Subscription1, you create an Azure file share named share1.

You create a shared access signature (SAS) named SAS1 as shown in the following exhibit.

Allowed services ⓘ

☐ Blob ☒ File ☐ Queue ☐ Table

Allowed resource types ⓘ


☒ Service ☒ Container ☒ Object

Allowed permissions ⓘ


☒ Read ☒ Write ☐ Delete ☒ List ☐ Add ☐ Create ☐ Update ☐ Process

Start and expiry date/time ⓘ

Start

2018-09-01  2:00:00 PM

End

2018-09-14  2:00:00 PM

(UTC + 02:00) — Current Timezone —

Allowed IP addresses ⓘ

193.77.134.10-193.77.134.50

Allowed protocols ⓘ

☒ HTTPS only ☐ HTTPS and HTTP

Signing key ⓘ

key1 ▼

Generate SAS and connection string

To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

If on September 2, 2018, you run Microsoft Azure Storage Explorer on a computer that has an IP address of 193.77.134.1, and you use SAS1 to connect to the storage account, you **[answer choice]**.

▼

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

If on September 10, 2018, you run the `net use` command on a computer that has an IP address of 193.77.134.50, and you use SAS1 as the password to connect to share1, you **[answer choice]**.

▼

- will be prompted for credentials
- will have no access
- will have read, write, and list access
- will have read-only access

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Will be prompted for credentials

Azure Storage Explorer is a standalone app that enables you to easily work with Azure Storage data on Windows, macOS, and Linux. It is used for connecting to and managing your Azure storage accounts.

Box 2: Will have read, write, and list access

The net use command is used to connect to file shares. References:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-dotnet-shared-access-signature-part-1>

<https://docs.microsoft.com/en-us/azure/vs-azure-tools-storage-manage-with-storage-explorer?tabs=windows>

NEW QUESTION 7

You have the Azure virtual machines shown in the following table.

Name	Azure region
VM1	West Europe
VM2	West Europe
VM3	North Europe
VM4	North Europe

You have a Recovery Services vault that protects VM1 and VM2. You need to protect VM3 and VM4 by using Recovery Services. What should you do first?

- A. Configure the extensions for VM3 and VM4.
- B. Create a new Recovery Services vault.
- C. Create a storage account.
- D. Create a new backup policy.

Answer: B

Explanation:

A Recovery Services vault is a storage entity in Azure that houses data. The data is typically copies of data, or configuration information for virtual machines (VMs), workloads, servers, or workstations. You can use Recovery Services vaults to hold backup data for various Azure services

References: <https://docs.microsoft.com/en-us/azure/site-recovery/azure-to-azure-tutorial-enable-replication>

NEW QUESTION 8

DRAG DROP

You have an on-premises file server named Server1 that runs Windows Server 2016. You have an Azure subscription that contains an Azure file share.

You deploy an Azure File Sync Storage Sync Service, and you create a sync group. You need to synchronize files from Server1 to Azure.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Answer Area

Create an Azure on-premises data gateway.

Install the Azure File Sync agent on Server1.

Create a Recovery Services vault.

Register Server1.

Install the DFS Replication server role on Server1.

Add a server endpoint.



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Install the Azure File Sync agent on Server1

The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share

Step 2: Register Server1.

Register Windows Server with Storage Sync Service

Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service.

Step 3: Add a server endpoint

Create a sync group and a cloud endpoint.

A sync group defines the sync topology for a set of files. Endpoints within a sync group are kept in sync with each other. A sync group must contain one cloud endpoint, which represents an Azure file share and one or more server endpoints. A server endpoint represents a path on registered server. References:

<https://docs.microsoft.com/en-us/azure/storage/files/storage-sync-files-deployment-guide>

NEW QUESTION 9

You plan to use the Azure Import/Export service to copy files to a storage account.

Which two files should you create before you prepare the drives for the import job? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. an XML manifest file

- B. a driveset CSV file
- C. a dataset CSV file
- D. a PowerShell PS1 file
- E. a JSON configuration file

Answer: BC

Explanation:

B: Modify the driveset.csv file in the root folder where the tool resides.

C: Modify the dataset.csv file in the root folder where the tool resides. Depending on whether you want to import a file or folder or both, add entries in the dataset.csv file

References: <https://docs.microsoft.com/en-us/azure/storage/common/storage-import-export-data-to-files>

NEW QUESTION 10

You have a Recovery Service vault that you use to test backups. The test backups contain two protected virtual machines. You need to delete the Recovery Services vault. What should you do first?

- A. From the Recovery Service vault, stop the backup of each backup item.
- B. From the Recovery Service vault, delete the backup data.
- C. Modify the disaster recovery properties of each virtual machine.
- D. Modify the locks of each virtual machine.


Answer: A

Explanation:

You can't delete a Recovery Services vault if it is registered to a server and holds backup data. If you try to delete a vault, but can't, the vault is still configured to receive backup data.

Remove vault dependencies and delete vault

In the vault dashboard menu, scroll down to the Protected Items section, and click Backup Items. In this menu, you can stop and delete Azure File Servers, SQL Servers in Azure VM, and Azure virtual machines.

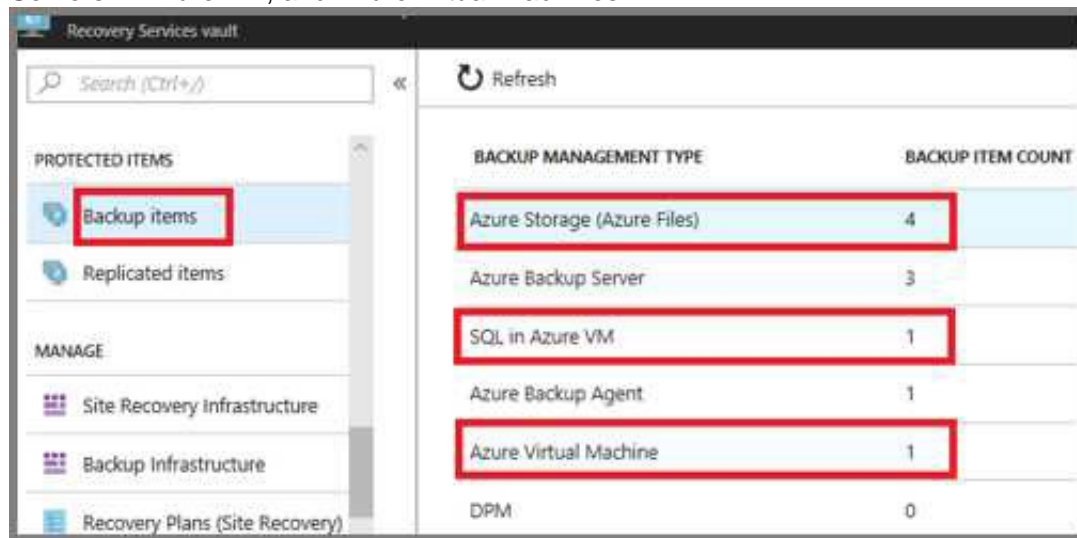

References: <https://docs.microsoft.com/en-us/azure/backup/backup-azure-delete-vault>

NEW QUESTION 10

You have an Azure subscription named Subscription1.

You deploy a Linux virtual machine named VM1 to Subscription1. You need to monitor the metrics and the logs of VM1. What should you use?

- A. LAD 3.0
- B. Azure Analysis Services
- C. the AzurePerformanceDiagnostics extension
- D. Azure HDInsight

Answer: C

Explanation:

You can use extensions to configure diagnostics on your VMs to collect additional metric data.

The basic host metrics are available, but to see more granular and VM-specific metrics, you need to install the Azure diagnostics extension on the VM. The Azure diagnostics extension allows additional monitoring and diagnostics data to be retrieved from the VM.

References: <https://docs.microsoft.com/en-us/azure/virtual-machines/linux/tutorial-monitoring>

NEW QUESTION 11

You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.

You have a computer named Computer1 that runs Windows 10. Computer1 is connected to the Internet.

You add a network interface named Interface1 to VM1 as shown in the exhibit (Click the Exhibit button.)

Network Interface: interface1

Effective security rules

Topology

Virtual network/subnet: **VMRD-vnet/default**
Public IP: **IP2**
Private IP: **10.0.0.6**

Accelerated networking: **Disabled**

INBOUND PORT RULES

Network security group **VM1-nsg** (attached to network interface: **Interface1**)
Impacts 0 subnets, 2 network interfaces

Add inbound

OUTBOUND PORT RULES

Network security group **VM1-nsg** (attached to network interface: **Interface1**)
Impacts 0 subnets, 2 network interfaces

Add outbound

From Computer1, you attempt to connect to VM1 by using Remote Desktop, but the connection fails. You need to establish a Remote Desktop connection to VM1. What should you do first?

- A. Start VM1.
- B. Attach a network interface.
- C. Delete the DenyAllOutBound outbound port rule.
- D. Delete the DenyAllInBound inbound port rule.

Answer: A

Explanation:

Incorrect Answers:

B: The network interface has already been added to VM. C: The Outbound rules are fine.

D: The inbound rules are fine. Port 3389 is used for Remote Desktop.

Note: Rules are processed in priority order, with lower numbers processed before higher numbers, because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.

References: <https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

NEW QUESTION 14

You plan to automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image.

You need to ensure that when the scale set virtual machines are provisioned, they have web server components installed.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE Each correct selection is worth one point.

- A. Modify the extensionProfile section of the Azure Resource Manager template.
- B. Create a new virtual machine scale set in the Azure portal.
- C. Create an Azure policy.
- D. Create an automation account.
- E. Upload a configuration script.

Answer: AB

Explanation:

Virtual Machine Scale Sets can be used with the Azure Desired State Configuration (DSC) extension handler. Virtual machine scale sets provide a way to deploy and manage large numbers of virtual machines, and can elastically scale in and out in response to load. DSC is used to configure the VMs as they come online so they are running the production software.

References: <https://docs.microsoft.com/en-us/azure/virtual-machine-scale-sets/virtual-machine-scale-sets-dsc>

NEW QUESTION 19**HOTSPOT**

You have an Azure subscription named Subscription1. Subscription1 contains two Azure virtual machines named VM1 and VM2. VM1 and VM2 run Windows Server 2016.

VM1 is backed up daily by Azure Backup without using the Azure Backup agent.

VM1 is affected by ransomware that encrypts data.

You need to restore the latest backup of VM1.

To which location can you restore the backup? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

You can perform a file recovery of VM1 to:

	▼
VM1 only	
VM2 only	
VM1 and VM2 only	
A new Azure virtual machine only	
Any Windows computer that has Internet connectivity	

You can restore VM1 to:

	▼
VM1 only	
VM2 only	
VM1 and VM2 only	
A new Azure virtual machine only	
Any Windows computer that has Internet connectivity	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: VM1 only

To restore files or folders from the recovery point, go to the virtual machine and choose the desired recovery point.

Box 2: A new Azure virtual machine only

On the Restore configuration blade, you have two choices:

? Create virtual machine

? Restore disks References:

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm>

<https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms>

NEW QUESTION 20

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.

You receive a notification that VM1 will be affected by maintenance. You need to move VM1 to a different host immediately.

Solution: From the Redeploy blade, you click Redeploy. Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

When you redeploy a VM, it moves the VM to a new node within the Azure infrastructure and then

powers it back on, retaining all your configuration options and associated resources.

References: <https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

NEW QUESTION 21

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure virtual machine named VM1. VM1 was deployed by using a custom Azure Resource Manager template named ARM1.json.

You receive a notification that VM1 will be affected by maintenance. You need to move VM1 to a different host immediately.

Solution: From the Overview blade, you move the virtual machine to a different resource group. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

You should redeploy the VM.

References: <https://docs.microsoft.com/en-us/azure/virtual-machines/windows/redeploy-to-new-node>

NEW QUESTION 23

HOTSPOT

You have an Azure subscription named Subscription1. Subscription1 contains the virtual machines in the following table.

Name	IP address
VM1	10.0.1.4
VM2	10.0.2.4
VM3	10.0.3.4

Subscription1 contains a virtual network named VNet1 that has the subnets in the following table.

Name	Address space	Connected virtual machine
Subnet1	10.0.1.0/24	VM1
Subnet2	10.0.2.0/24	VM2
Subnet3	10.0.3.0/24	VM3

VM3 has a network adapter named NIC3. IP forwarding is enabled on NIC3. Routing is enabled on VM3.

You create a route table named RT1. RT1 is associated to Subnet1 and Subnet2 and contains the routes in the following table.

Address prefix	Next hop type	Next hop address
10.0.1.0/24	Virtual appliance	10.0.3.4
10.0.2.0/24	Virtual appliance	10.0.3.4

You apply RT1 to Subnet1.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Network traffic from VM3 can reach VM1.	<input type="radio"/>	<input type="radio"/>
If VM3 is turned off, network traffic from VM2 can reach VM1.	<input type="radio"/>	<input type="radio"/>
Network traffic from VM1 can reach VM2.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes

Traffic from VM1 and VM2 can reach VM3 thanks to the routing table, and as IP forwarding is enabled on VM3, traffic from VM3 can reach VM1.

Box 2: No

VM3, which has IP forwarding, must be turned on, in order for traffic from VM2 to reach VM1. Box 3: Yes

The traffic from VM1 will reach VM3, which thanks to IP forwarding, will send the traffic to VM2.

References: <https://www.quora.com/What-is-IP-forwarding>

NEW QUESTION 24

HOTSPOT

You plan to deploy five virtual machines to a virtual network subnet.

Each virtual machine will have a public IP address and a private IP address. Each virtual machine requires the same inbound and outbound security rules.

What is the minimum number of network interfaces and network security groups that you require? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Minimum number of network interfaces:

▼

5

10

15

20

Minimum number of network security groups:

▼

1

2

5

10

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 10

One public and one private network interface for each of the five VMs. Box 2: 1

You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose.

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/security-overview>

NEW QUESTION 26

You have two subscriptions named Subscription1 and Subscription2. Each subscription is associated to a different Azure AD tenant.

Subscription1 contains a virtual network named VNet1. VNet1 contains an Azure virtual machine named VM1 and has an IP address space of 10.0.0.0/16.

Subscription2 contains a virtual network named VNet2. VNet2 contains an Azure virtual machine named VM2 and has an IP address space of 10.10.0.0/24.

You need to connect VNet1 to VNet2. What should you do first?

- A. Move VNet1 to Subscription2.
- B. Modify the IP address space of VNet2.
- C. Provision virtual network gateways.
- D. Move VM1 to Subscription2.

Answer: C

Explanation:

The virtual networks can be in the same or different regions, and from the same or different subscriptions. When connecting VNets from different subscriptions, the subscriptions do not need to be associated with the same Active Directory tenant.

Configuring a VNet-to-VNet connection is a good way to easily connect VNets. Connecting a virtual network to another virtual network using the VNet-to-VNet connection type (VNet2VNet) is similar to

creating a Site-to-Site IPsec connection to an on-premises location. Both connectivity types use a VPN gateway to provide a secure tunnel using IPsec/IKE, and both function the same way when communicating.

The local network gateway for each VNet treats the other VNet as a local site. This lets you specify additional address space for the local network gateway in order to route traffic.

References: <https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-vnet-vnet-resource-manager-portal>

NEW QUESTION 30

HOTSPOT

You have an Azure subscription named Subscription1. Subscription1 contains the resources in the following table.

Name	Type
RG2	Resource group
VNet1	Virtual network
VNet2	Virtual network
VM5	Virtual machine connected to VNet1
VM6	Virtual machine connected to VNet2

In Azure, you create a private DNS zone named adatum.com. You set the registration virtual network to VNet2. The adatum.com zone is configured as shown in the following exhibit.

Resource group (change)

vmrg

Subscription (change)

Azure Pass

Subscription ID

a4fde29b-d56a-4f6c-8298-6c53cd0b720c

Name server 1

-

Name server 2

-

Name server 3

-

Name server 4

-

Tags (change)

Click here to add tags

⌵

🔍

Search record sets

NAME	TYPE	TTL	VALUE
@	SOA	3600	Email: azuredns-hostmaster.microsoft.com Host: internal.cloudapp.net Refresh: 3600 Retry: 300 Expire:2419200 Minimum TTL: 300 Serial number: 1
vm1	A	3600	10.1.0.4
vm9	A	3600	10.1.0.12

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
 NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
The A record for VM5 will be registered automatically in the adatum.com.zone.	<input type="radio"/>	<input type="radio"/>
VM5 can resolve VM9.adatum.com.	<input type="radio"/>	<input type="radio"/>
VM6 can resolve VM9.adatum.com.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: No
 Azure DNS provides automatic registration of virtual machines from a single virtual network that's linked to a private zone as a registration virtual network. VM5 does not belong to the registration virtual network though.

Box 2: No
 Forward DNS resolution is supported across virtual networks that are linked to the private zone as resolution virtual networks. VM5 does belong to a resolution virtual network.

Box 3: Yes
 VM6 belongs to registration virtual network, and an A (Host) record exists for VM9 in the DNS zone. By default, registration virtual networks also act as resolution virtual networks, in the sense that DNS resolution against the zone works from any of the virtual machines within the registration virtual network.

References: <https://docs.microsoft.com/en-us/azure/dns/private-dns-overview>









NEW QUESTION 31

HOTSPOT
 You have an Azure subscription named Subscription1. Subscription1 contains a virtual machine named VM1.
 You install and configure a web server and a DNS server on VM1.
 VM1 has the effective network security rules shown in the following exhibit.


 **Network Interface:** **vm1900** **Effective security rules** **Topology** 
Virtual network/subnet: **VMRG-vnet/default** Public IP: **104.40.215.211** Private IP: **10.0.0.5** Accelerated
networking: **Disabled**

INBOUND PORT RULES

 Network security group **VM1-nsg** (attached to network interface: **vm1900**) **Add inbound port rule**
Impacts 0 subnets, 1 network interfaces

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
900	 Rule2	50-60	Any	Any	Any	 Deny ...
1000	 default-allow-rdp	3389	TCP	Any	Any	 Allow ...
1010	Rule1	50-500	TCP	Any	Any	 Allow ...
65000	AllowVnetInBound	Any	Any	VirtualNet...	VirtualNet...	 Allow ...
65001	AllowAzureLoadBalan...	Any	Any	AzureLoad...	Any	 Allow ...
65500	DenyAllInBound	Any	Any	Any	Any	 Deny ...

OUTBOUND PORT RULES

 Network security group **VM1-nsg** (attached to network interface: **vm1900**) **Add outbound port**
Impacts 0 subnets, 1 network interfaces

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
1000	Rule3	80	Any	Any	Any	 Deny ...
65000	AllowVnetOutBound	Any	Any	VirtualNet...	VirtualNet...	 Allow ...
65001	AllowInternetOutBou...	Any	Any	Any	Internet	 Allow ...
65500	DenyAllOutBound	Any	Any	Any	Any	 Deny ...

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Internet users [answer choice].

can connect to only the DNS server on VM1

can connect to only the web server on VM1

can connect to the web server and the DNS server on VM1

cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Interent users [answer choice].

can connect to only the DNS server on VM1

can connect to only the web server on VM1

can connect to the web server and the DNS server on VM1

cannot connect to the web server and the DNS server on VM1

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Internet users [answer choice].

▼

can connect to only the DNS server on VM1

can connect to only the web server on VM1

can connect to the web server and the DNS server on VM1

cannot connect to the web server and the DNS server on VM1

If you delete Rule2, Interent users [answer choice].

▼

can connect to only the DNS server on VM1

can connect to only the web server on VM1

can connect to the web server and the DNS server on VM1

cannot connect to the web server and the DNS server on VM1

NEW QUESTION 35

HOTSPOT

You have peering configured as shown in the following exhibit.

Virtual networks

+

 Add

≡

 Edit columns

⋮

 More

Filter by name...

NAME

test1-vnet

testVNET1

vNET1

vNET2

vNET3

vNET4

vNET5

vNET6

+

 Add

🔍

 Search peerings

NAME	PEERING STATUS	PEER	GATEWAY TRANSIT
peering1	Disconnected	vNET1	Enabled ...
peering2	Disconnected	vNET2	Disabled ...

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

Answer Area

Hosts on vNET6 can communicate with hosts on [answer choice].

▼

vNET6 only

vNET6 and vNET1 only

vNET6, vNET1, and vNET2 only

all the virtual networks in the subscription

To change the status of the peering connection to vNET1 to **Connected**, you must first [answer choice].

▼

add a service endpoint

add a subnet

delete peering1

modify the address space

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: vNET6 only

Box 2: Modify the address space

The virtual networks you peer must have non-overlapping IP address spaces.

References: <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-manage-peering#requirements-and-constraints>

NEW QUESTION 37

You have an Azure subscription that contains the resources in the following table.

Name	Type	Azure region	Resource group
VNet1	Virtual network	West US	RG2
VNet2	Virtual network	West US	RG1
VNet3	Virtual network	East US	RG1
NSG1	Network security group (NSG)	East US	RG2

To which subnets can you apply NSG1?

- A. the subnets on VNet2 only
- B. the subnets on VNet1 only
- C. the subnets on VNet2 and VNet3 only
- D. the subnets on VNet1, VNet2, and VNet3
- E. the subnets on VNet3 only

Answer: E

Explanation:

All Azure resources are created in an Azure region and subscription. A resource can only be created in a virtual network that exists in the same region and subscription as the resource.

References: <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-vnet-plan-design-arm>

NEW QUESTION 40

HOTSPOT

You have an Azure subscription named Subscription1. Subscription1 contains the resources in the following table.

Name	Type
RG1	Resource group
RG2	Resource group
VNet1	Virtual network
VNet2	Virtual network

VNet1 is in RG1. VNet2 is in RG2. There is no connectivity between VNet1 and Vnet2.

An administrator named Admin1 creates an Azure virtual machine named VM1 in RG1. VM1 uses a disk named Disk1 and connects to VNet1. Admin1 then installs a custom application in VM1.

You need to move the custom application to Vnet2. The solution must minimize administrative effort. Which two actions should you perform? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

First action:

▼

Create a network interface in RG2.

Detach a network interface.

Delete VM1.

Move a network interface to RG2.

Second action:

▼

Attach a network interface.

Create a network interface in RG2.

Create a new virtual machine.

Move VM1 to RG2.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

You can move a VM and its associated resources to another resource group using the portal. References: <https://docs.microsoft.com/en-us/azure/virtual-machines/windows/move-vm>

NEW QUESTION 43

HOTSPOT

You have an Azure Active Directory (Azure AD) tenant named adatum.com. Adatum.com contains the groups in the following table.

Name	Group type	Membership type	Membership rule
Group1	Security	Dynamic user	(user.city -startsWith "m")
Group2	Microsoft Office 365	Dynamic user	(user.department -notIn ["HR"])
Group3	Microsoft Office 365	Assigned	<i>Not applicable</i>

You create two user accounts that are configured as shown in the following table.

Name	City	Department	Office 365 license assigned
User1	Montreal	Human resources	Yes
User2	Melbourne	Marketing	No

To which groups do User1 and User2 belong? To answer. select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

User1:

	▼
Group1 only	
Group2 only	
Group3 only	
Group1 and Group2 only	
Group1 and Group3 only	
Group2 and Group3 only	
Group1, Group2, and Group3	

User2:

	▼
Group1 only	
Group2 only	
Group3 only	
Group1 and Group2 only	
Group1 and Group3 only	
Group2 and Group3 only	
Group1, Group2, and Group3	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Group 1 only First rule applies

Box 2: Group1 and Group2 only Both membership rules apply.

References: <https://docs.microsoft.com/en-us/sccm/core/clients/manage/collections/create-collections>

NEW QUESTION 44

You have an Active Directory forest named contoso.com.

You install and configure Azure AD Connect to use password hash synchronization as the single sign- on (SSO) method. Staging mode is enabled.

You review the synchronization results and discover that the Synchronization Service Manager does not display any sync jobs.

You need to ensure that the synchronization completes successfully. What should you do?

- A. From Synchronization Service Manager, run a full import.
- B. Run Azure AD Connect and set the SSO method to Pass-through Authentication.
- C. From Azure PowerShell, run Start-AdSyncSyncCycle -PolicyType Initial.
- D. Run Azure AD Connect and disable staging mode.

Answer: D

Explanation:

Staging mode must be disabled. If the Azure AD Connect server is in staging mode, password hash synchronization is temporarily disabled.

References: <https://docs.microsoft.com/en-us/azure/active-directory/connect/active-directory- aadconnectsync-troubleshoot-password-hash-synchronization#no-passwords-are-synchronized- troubleshoot-by-using-the-troubleshooting-task>

NEW QUESTION 46

You download an Azure Resource Manager template based on an existing virtual machine. The template will be used to deploy 100 virtual machines.

You need to modify the template to reference an administrative password. You must prevent the password from being stored in plain text.

What should you create to store the password?

- A. Azure Active Directory (AD) Identity Protection and an Azure policy
- B. a Recovery Services vault and a backup policy
- C. an Azure Key Vault and an access policy
- D. an Azure Storage account and an access policy

Answer: C

Explanation:

You can use a template that allows you to deploy a simple Windows VM by retrieving the password that is stored in a Key Vault. Therefore the password is never put in plain text in the template parameter file.

References: <https://azure.microsoft.com/en-us/resources/templates/101-vm-secure-password/>

NEW QUESTION 49

Your company registers a domain name of contoso.com.

You create an Azure DNS named contoso.com and then you add an A record to the zone for a host named www that has an IP address of 131.107.1.10.

You discover that Internet hosts are unable to resolve www.contoso.com to the 131.107.1.10 IP address.

You need to resolve the name resolution issue.

Solution: You add an NS record to the contoso.com zone. Does this meet the goal?

- A. Yes

B. No

Answer: A

Explanation:

Before you can delegate your DNS zone to Azure DNS, you need to know the name servers for your zone. The NS record set contains the names of the Azure DNS name servers assigned to the zone. References: <https://docs.microsoft.com/en-us/azure/dns/dns-delegate-domain-azure-dns>

NEW QUESTION 51

Your company registers a domain name of contoso.com.

You create an Azure DNS named contoso.com and then you add an A record to the zone for a host named www that has an IP address of 131.107.1.10.

You discover that Internet hosts are unable to resolve www.contoso.com to the 131.107.1.10 IP address.

You need to resolve the name resolution issue.

Solution: You modify the SOA record in the contoso.com zone Does this meet the goal?

A. Yes

B. No

Answer: B

Explanation:

Modify the NS record, not the SOA record.

Note: The SOA record stores information about the name of the server that supplied the data for the zone; the administrator of the zone; the current version of the data file; the number of seconds a secondary name server should wait before checking for updates; the number of seconds a secondary name server should wait before retrying a failed zone transfer; the maximum number of seconds that a secondary name server can use data before it must either be refreshed or expire; and a default number of seconds for the time-to-live file on resource records.

References: <https://searchnetworking.techtarget.com/definition/start-of-authority-record>

NEW QUESTION 53

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription named Subscription1. Subscription1 contains a resource group named RG1. RG1 contains resources that were deployed by using templates.

You need to view the date and time when the resources were created in RG1. Solution: From the RG1 blade, you click Automation script.

Does this meet the goal?

A. Yes

B. No

Answer: B

NEW QUESTION 55

You have an Azure subscription.

You plan to use Azure Resource Manager templates to deploy 50 Azure virtual machines that will be part of the same availability set.

You need to ensure that as many virtual machines as possible are available if the fabric fails or during servicing.

How should you configure the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentschema.json",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "resources": [
    {
      "type": "Microsoft.Compute/availabilitySets",
      "name": "ha",
      "apiVersion": "2017-12-01",
      "location": "eastus",
      "properties": {
        "platformFaultDomainCount": 0,
        "platformUpdateDomainCount": 0
      }
    }
  ]
}
```

Select two alternatives below.

A. platformFaultDomainCount: 0

- B. platformFaultDomainCount: 1
- C. platformFaultDomainCount: 2
- D. platformFaultDomainCount: 3
- E. platformFaultDomainCount: 4
- F. platformUpdateDomainCount: 10
- G. platformUpdateDomainCount: 20
- H. platformUpdateDomainCount: 25
- I. platformUpdateDomainCount: 30
- J. platformUpdateDomainCount: 40
- K. platformUpdateDomainCount: 50

Answer: CG

Explanation:

Use two fault domains.

2 or 3 is max, depending on which region you are in. Use 20 for platformUpdateDomainCount

Increasing the update domain (platformUpdateDomainCount) helps with capacity and availability planning when the platform reboots nodes. A higher number for the pool (20 is max) means that fewer of their nodes in any given availability set would be rebooted at once.

References:

<https://www.itprotoday.com/microsoft-azure/check-if-azure-region-supports-2-or-3-fault-domains-managed-disks>

<https://github.com/Azure/acs-engine/issues/1030>

NEW QUESTION 57

DRAG DROP

You have an Azure subscription that is used by four departments in your company. The subscription contains 10 resource groups. Each department uses resources in several resource groups.

You need to send a report to the finance department. The report must detail the costs for each department. Which three actions should you perform in sequence?

To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Assign a tag to each resource group.

Open the **Resource costs** blade of each resource group.

Download the usage report.

Assign a tag to each resource.

From the Cost analysis blade, filter the view by tag.

Answer Area

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Assign a tag to each resource.

You apply tags to your Azure resources giving metadata to logically organize them into a taxonomy. After you apply tags, you can retrieve all the resources in your subscription with that tag name and value. Each resource or resource group can have a maximum of 15 tag name/value pairs. Tags applied to the resource group are not inherited by the resources in that resource group.

Box 2: From the Cost analysis blade, filter the view by tag

After you get your services running, regularly check how much they're costing you. You can see the current spend and burn rate in Azure portal.

1. Visit the Subscriptions blade in Azure portal and select a subscription.
2. You should see the cost breakdown and burn rate in the popup blade.
3. Click Cost analysis in the list to the left to see the cost breakdown by resource. Wait 24 hours after you add a service for the data to populate.
4. You can filter by different properties like tags, resource group, and timespan. Click Apply to confirm the filters and Download if you want to export the view to a Comma-Separated Values (.csv) file.

Box 3: Download the usage report References:

<https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags> <https://docs.microsoft.com/en-us/azure/billing/billing-getting-started>

NEW QUESTION 60

You have a resource group named RG1. RG1 contains an Azure Storage account named storageaccount1 and a virtual machine named VM1 that runs Windows Server 2016. Storageaccount1 contains the disk files for VM1. You apply a ReadOnly lock to RG1.

What can you do from the Azure portal?

- A. Generate an automation script for RG1.
- B. View the keys of storageaccount1.
- C. Upload a blob to storageaccount1.
- D. Start VM1.

Answer: B

Explanation:

ReadOnly means authorized users can read a resource, but they can't delete or update the resource. Applying this lock is similar to restricting all authorized users to the permissions granted by the Reader role.

References: <https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-lock-resources>

NEW QUESTION 65

You configure Azure AD Connect for Azure Active Directory Seamless Single Sign-On (Azure AD Seamless SSO) for an on-premises network. Users report that when they attempt to access myapps.microsoft.com, they are prompted multiple times to sign in and are forced to use an account name that ends with onmicrosoft.com.

You discover that there is a UPN mismatch between Azure AD and the on-premises Active Directory. You need to ensure that the users can use single-sign on (SSO) to access Azure resources.

What should you do first?

- A. From the on-premises network, deploy Active Directory Federation Services (AD FS).
- B. From Azure AD, add and verify a custom domain name.
- C. From the on-premises network, request a new certificate that contains the Active Directory domain name.
- D. From the server that runs Azure AD Connect, modify the filtering options.

Answer: B

Explanation:

Azure AD Connect lists the UPN suffixes that are defined for the domains and tries to match them with a custom domain in Azure AD. Then it helps you with the appropriate action that needs to be taken. The Azure AD sign-in page lists the UPN suffixes that are defined for on-premises Active Directory and displays the corresponding status against each suffix. The status values can be one of the following: State: Verified
Azure AD Connect found a matching verified domain in Azure AD. All users for this domain can sign in by using their on-premises credentials. State: Not verified
Azure AD Connect found a matching custom domain in Azure AD, but it isn't verified. The UPN suffix of the users of this domain will be changed to the default .onmicrosoft.com suffix after synchronization if the domain isn't verified.
Action Required: Verify the custom domain in Azure AD.
References: <https://docs.microsoft.com/en-us/azure/active-directory/hybrid/plan-connect-user-signin>

NEW QUESTION 66

You have two Azure Active Directory (Azure AD) tenants named contoso.com and fabrikam.com. You have a Microsoft account that you use to sign in to both tenants.

You need to configure the default sign-in tenant for the Azure portal. What should you do?

- A. From the Azure portal, configure the portal settings.
- B. From the Azure portal, change the directory.
- C. From Azure Cloud Shell, run Set-AzureRmContext.
- D. From Azure Cloud Shell, run Set-AzureRmSubscription.

Answer: B

Explanation:

Change the subscription directory in the Azure portal.
The classic portal feature Edit Directory, that allows you to associate an existing subscription to your Azure Active Directory (AAD), is now available in Azure portal. It used to be available only to Service Admins with Microsoft accounts, but now it's available to users with AAD accounts as well.
To get started:
1. Go to Subscriptions.
2. Select a subscription.
3. Select Change directory. Incorrect Answers:
C: The Set-AzureRmContext cmdlet sets authentication information for cmdlets that you run in the current session. The context includes tenant, subscription, and environment information.
References: <https://azure.microsoft.com/en-us/updates/edit-directory-now-in-new-portal/>

NEW QUESTION 69

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

Your company registers a domain name of contoso.com.

You create an Azure DNS zone named contoso.com, and then you add an A record to the zone for a host named www that has an IP address of 131.107.1.10.

You discover that Internet hosts are unable to resolve www.contoso.com to the 131.107.1.10 IP address.

You need to resolve the name resolution issue.

Solution: You create a PTR record for www in the contoso.com zone. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Modify the Name Server (NS) record.
References: <https://docs.microsoft.com/en-us/azure/dns/dns-delegate-domain-azure-dns>

NEW QUESTION 70

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: You assign a built-in policy definition to the subscription. Does this meet the goal?

- A. Yes
B. No

Answer: B

NEW QUESTION 74

HOTSPOT

You have a virtual network named VNet1 that has the configuration shown in the following exhibit.

```
PS C:\> Get-AzureRmVirtualNetwork -Name Vnet1 -ResourceGroupName Production

Name                : Vnet1
ResourceGroupName   : Production
Location            : westus
Id                  : /subscriptions/14d26092-8e42-4ea7-b770-9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/Vnet1
Etag                 : W/"76f7edd6-d022-455b-aeae-376059318e5d"
ResourceGuid        : 562696cc-b2ba-4cc5-9619-0a735d6c34c7
ProvisioningState    : Succeeded
Tags                :
AddressSpace         : {
                        "AddressPrefixes": [
                          "10.2.0.0/16"
                        ]
                      }
DhcpOptions          : {}
Subnets             : [
                        {
                          "Name": "default",
                          "Etag": "W/\\"76f7edd6-d022-455b-aeae-376059318e5d\\"",
                          "Id": "/subscriptions/14d26092-8e42-4ea7-b770-9dcef70fb1ea/resourceGroups/Production/providers/Microsoft.Network/virtualNetworks/Vnet1/subnets/default",
                          "AddressPrefix": "10.2.0.0/24",
                          "IpConfigurations": [],
                          "ResourceNavigationLinks": [],
                          "ServiceEndpoints": [],
                          "ProvisioningState": "Succeeded"
                        }
                      ]
VirtualNetworkPeerings : []
EnableDDoSProtection  : false
EnableVmProtection    : false
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

Answer Area

Before a virtual machine on VNet1 can receive an IP address from 192.168.1.0/24, you must first [answer choice].

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

Before a virtual machine on VNet1 can receive an IP address from 10.2.1.0/24, you must first [answer choice].

add a network interface
add a subnet
add an address space
delete a subnet
delete an address space

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Box 1: add a subnet

Your IaaS virtual machines (VMs) and PaaS role instances in a virtual network automatically receive a private IP address from a range that you specify, based on the subnet they are connected to. We need to add the 192.168.1.0/24 subnet.

Box 2: add a network interface

The 10.2.1.0/24 network exists. We need to add a network interface.

References: <https://docs.microsoft.com/en-us/azure/virtual-network/virtual-networks-static-private-ip-arm-portal>

NEW QUESTION 75

You have an Azure subscription that contains a storage account named account1.

You plan to upload the disk files of a virtual machine to account1 from your on-premises network. The on-premises network uses a public IP address space of 131.107.1.0/24.

You plan to use the disk files to provision an Azure virtual machine named VM1. VM1 will be attached to a virtual network named VNet1. VNet1 uses an IP address space of 192.168.0.0/24.

You need to configure account1 to meet the following requirements:

? Ensure that you can upload the disk files to account1.

? Ensure that you can attach the disks to VM1.

? Prevent all other access to account1.

Which two actions should you perform? Each correct selection presents part of the solution.

NOTE: Each correct selection is worth one point.

A. From the Firewalls and virtual networks blade of account1, add the 131.107.1.0/24 IP address range.

B. From the Firewalls and virtual networks blade of account1, select Selected networks.

C. From the Firewalls and virtual networks blade of account1, add VNet1.

D. From the Firewalls and virtual networks blade of account1, select Allow trusted Microsoft services to access this storage account.

E. From the Service endpoints blade of VNet1, add a service endpoint.

Answer: BE

Explanation:

B: By default, storage accounts accept connections from clients on any network. To limit access to selected networks, you must first change the default action. Azure portal

1. Navigate to the storage account you want to secure.

2. Click on the settings menu called Firewalls and virtual networks.

3. To deny access by default, choose to allow access from 'Selected networks'. To allow traffic from all networks, choose to allow access from 'All networks'.

4. Click Save to apply your changes. E: Grant access from a Virtual Network


Storage accounts can be configured to allow access only from specific Azure Virtual Networks.


By enabling a Service Endpoint for Azure Storage within the Virtual Network, traffic is ensured an optimal route to the Azure Storage service. The identities of the virtual network and the subnet are also transmitted with each request.

References: <https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security>

NEW QUESTION 79

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

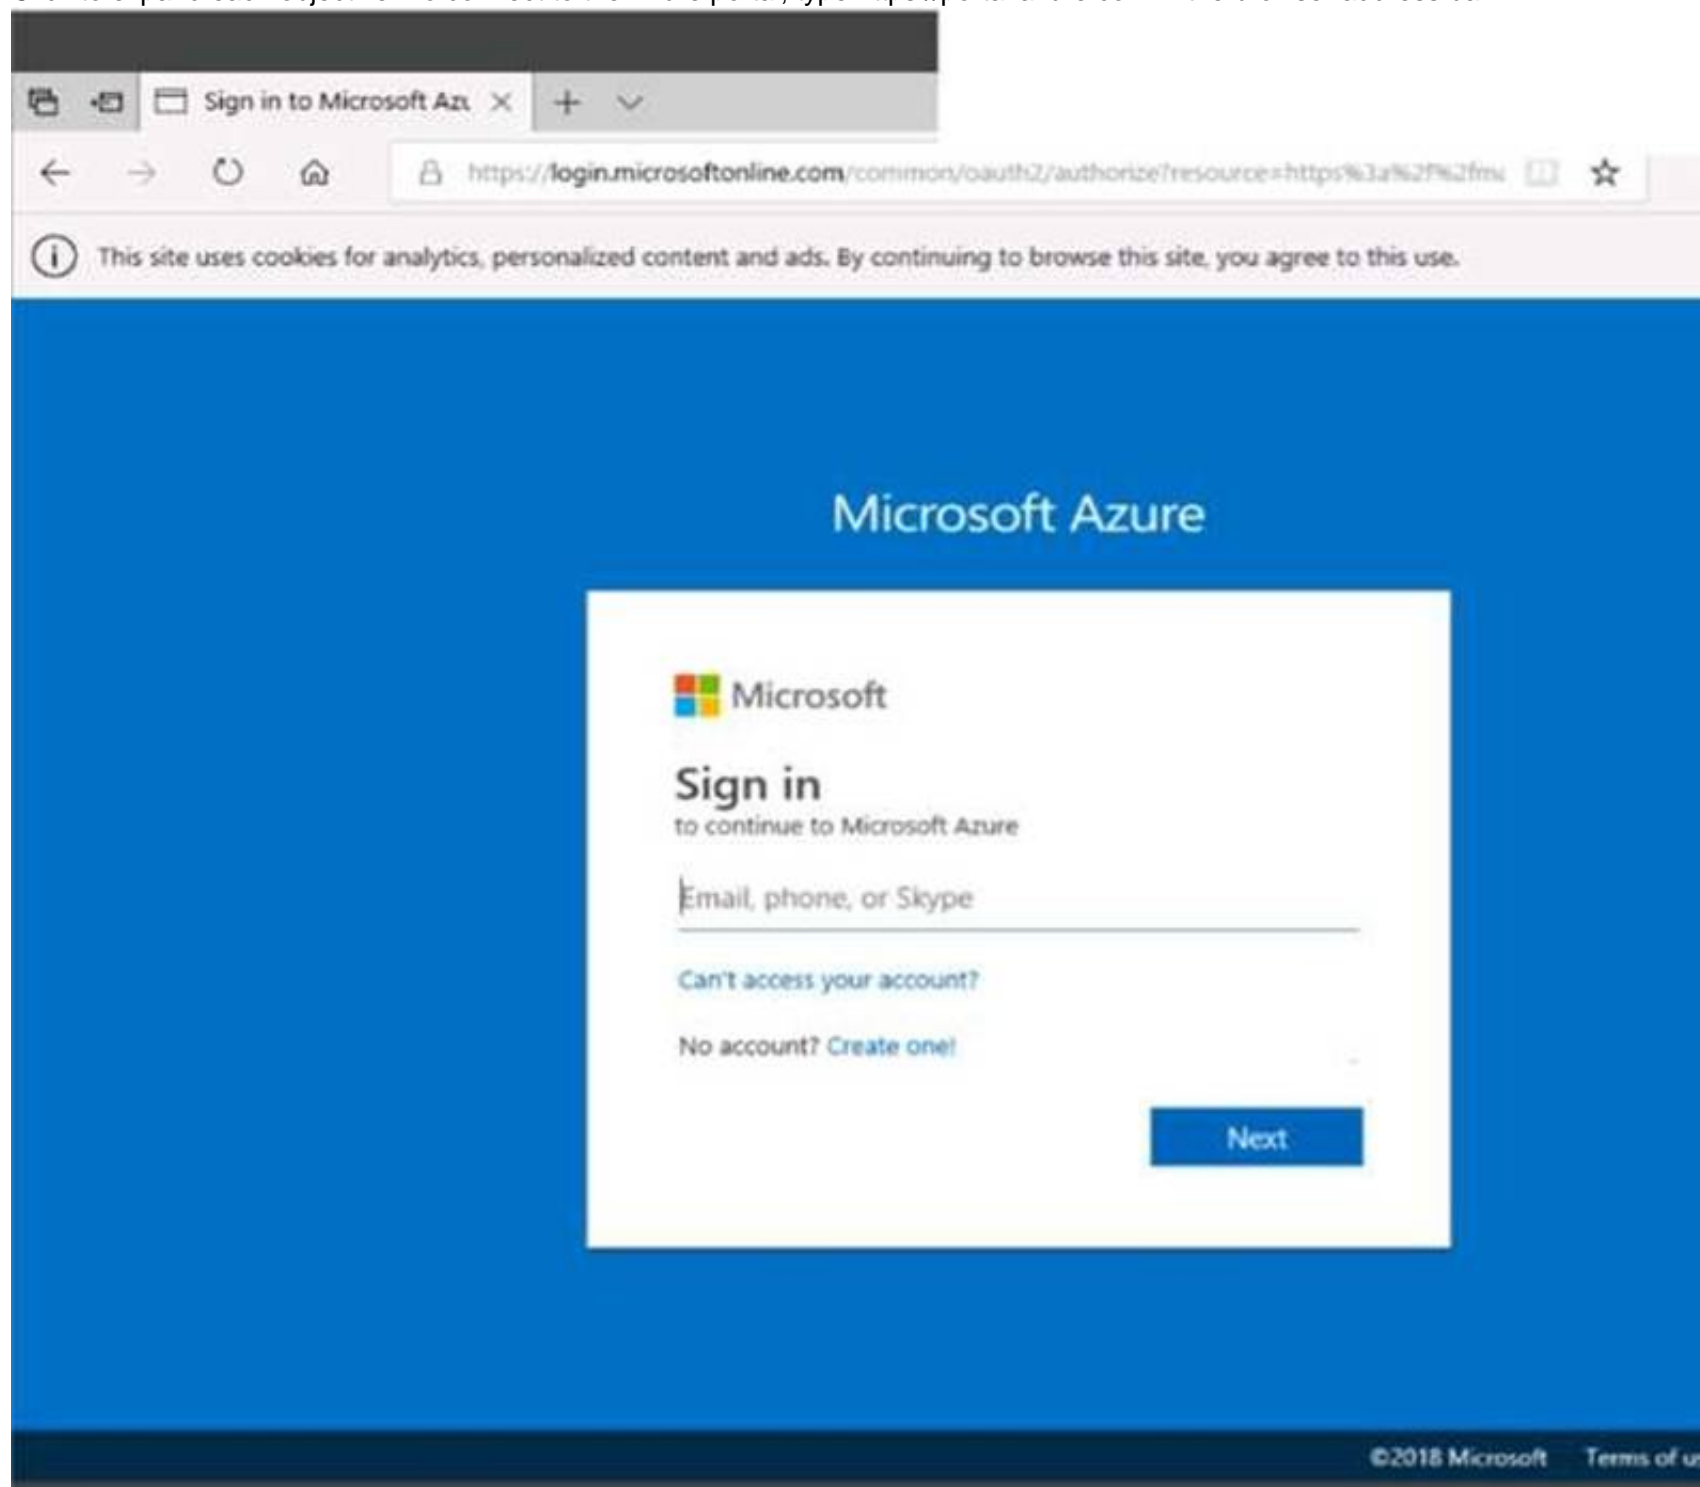

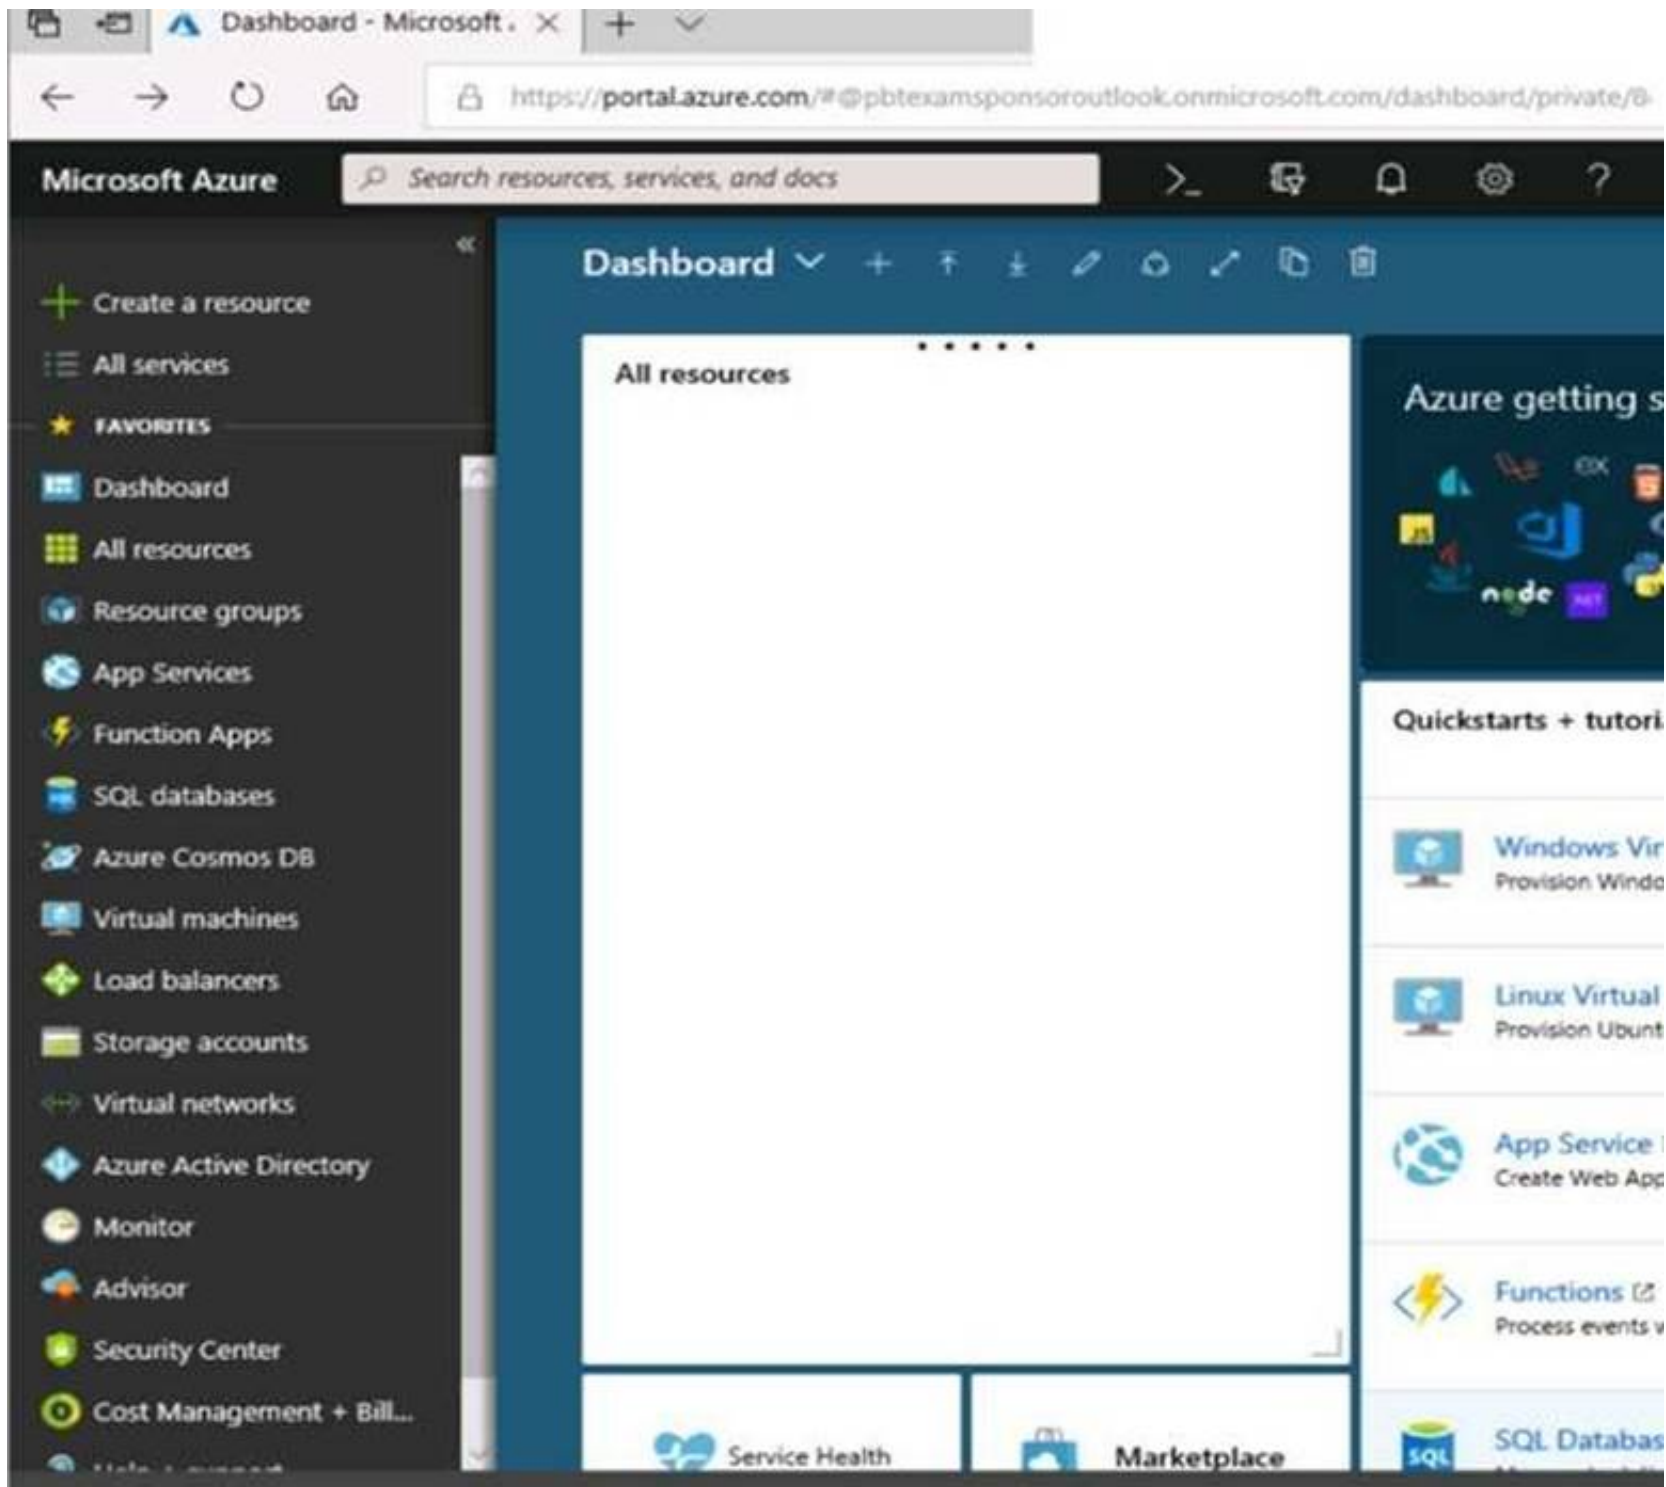

Instructions
Comments
Controls Available
Keyboard Shortcuts Available

Tasks

Click to expand each objective

- Configure servers

☐ Add the "Print and Document Services" role to server LON-SVR1, installing any required management features and enabling both Print and LPD Services.
- Configure file and share access

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

Your on-premises network uses an IP address range of 131.107.2.0 to 131.107.2.255.

You need to ensure that only devices from the on-premises network can connect to the rg1lod7523691n1 storage account.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Navigate to the rg1lod7523691n1 storage account.

Step 2: Click on the settings menu called Firewalls and virtual networks.


Step 3: Ensure that you have elected to allow access from 'Selected networks'.



Step 4: To grant access to an internet IP range, enter the address range of 131.107.2.0 to 131.107.2.255 (in CIDR format) under Firewall, Address Ranges.

References: <https://docs.microsoft.com/en-us/azure/storage/common/storage-network-security>

NEW QUESTION 84

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

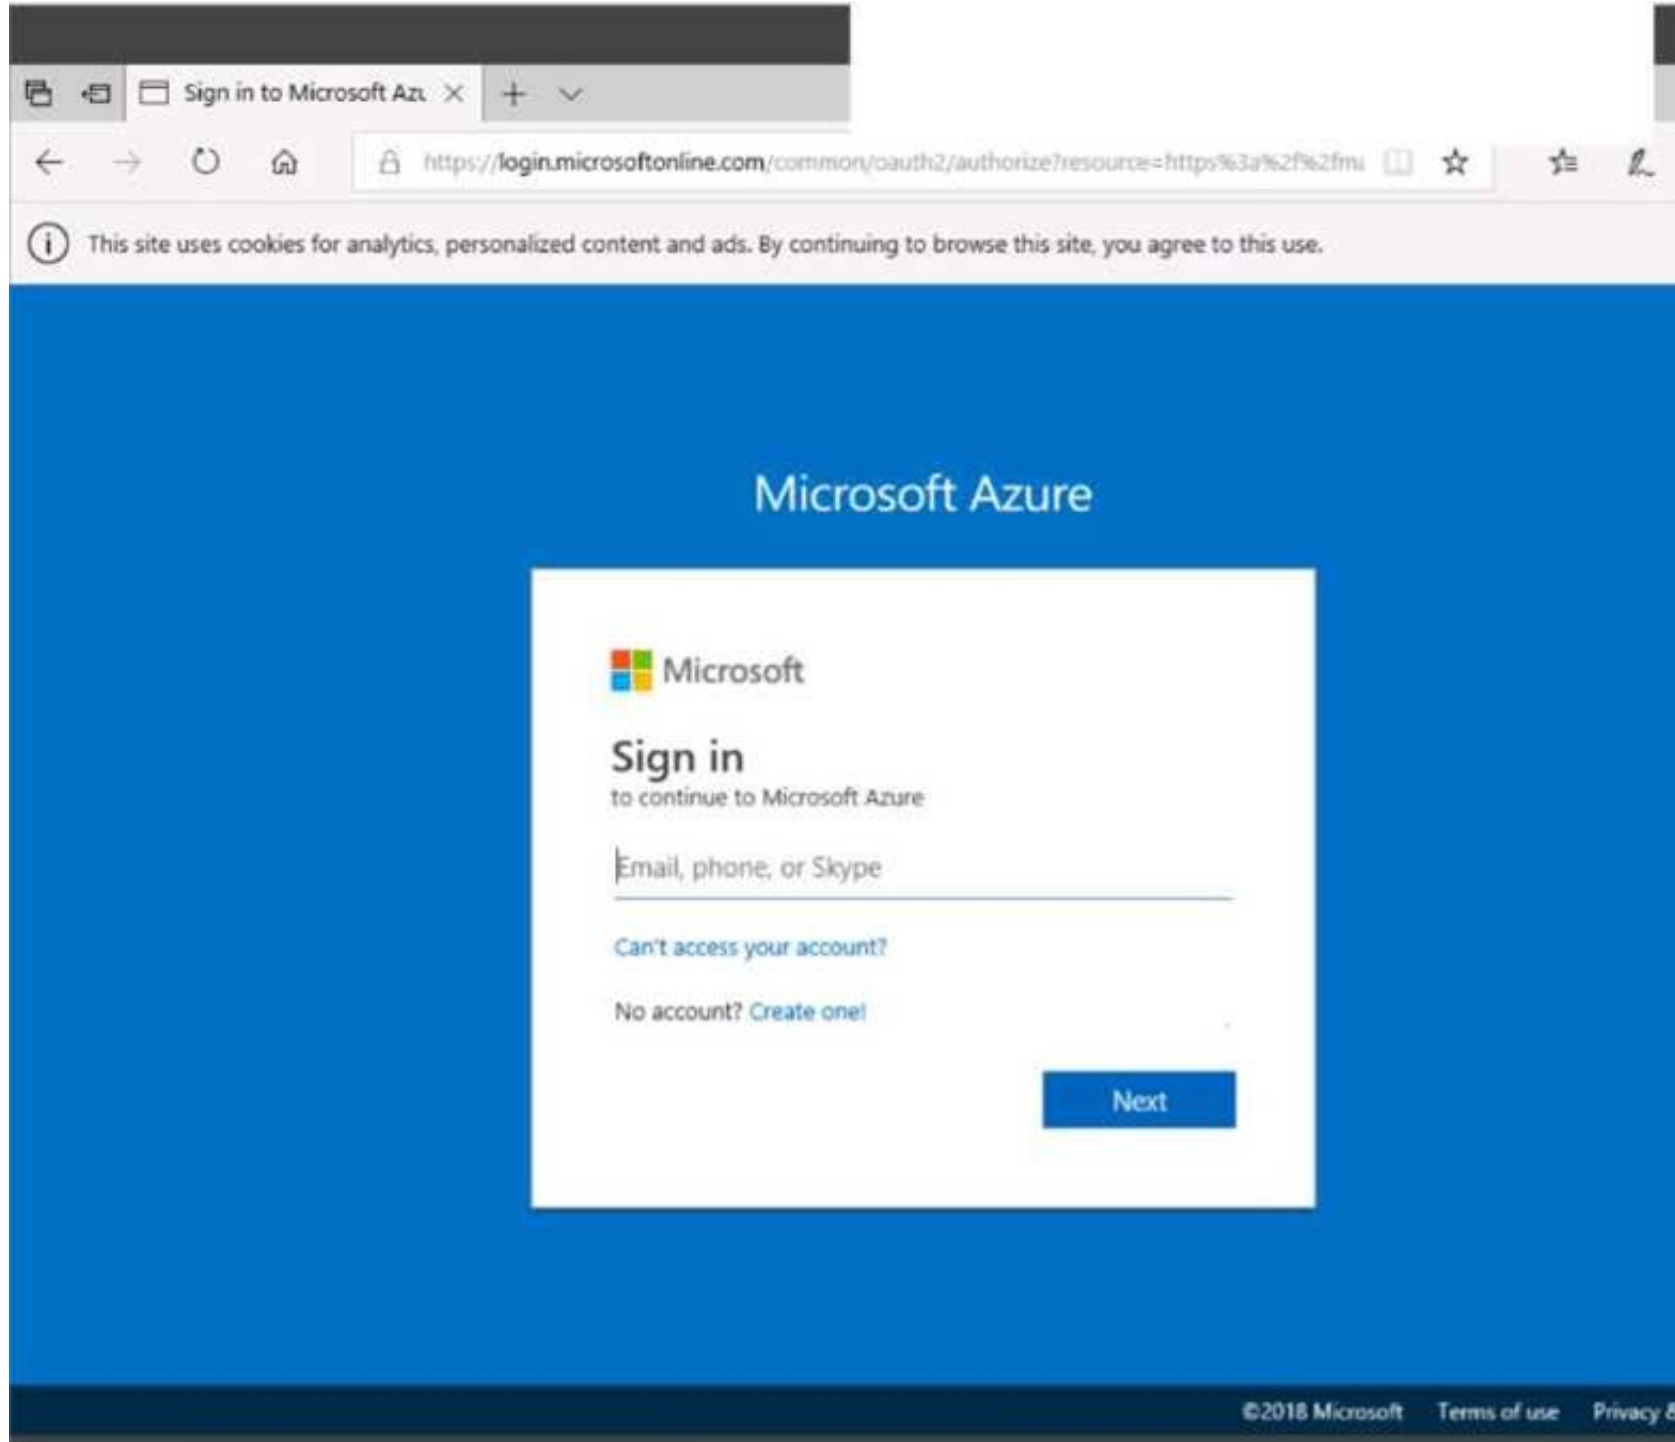

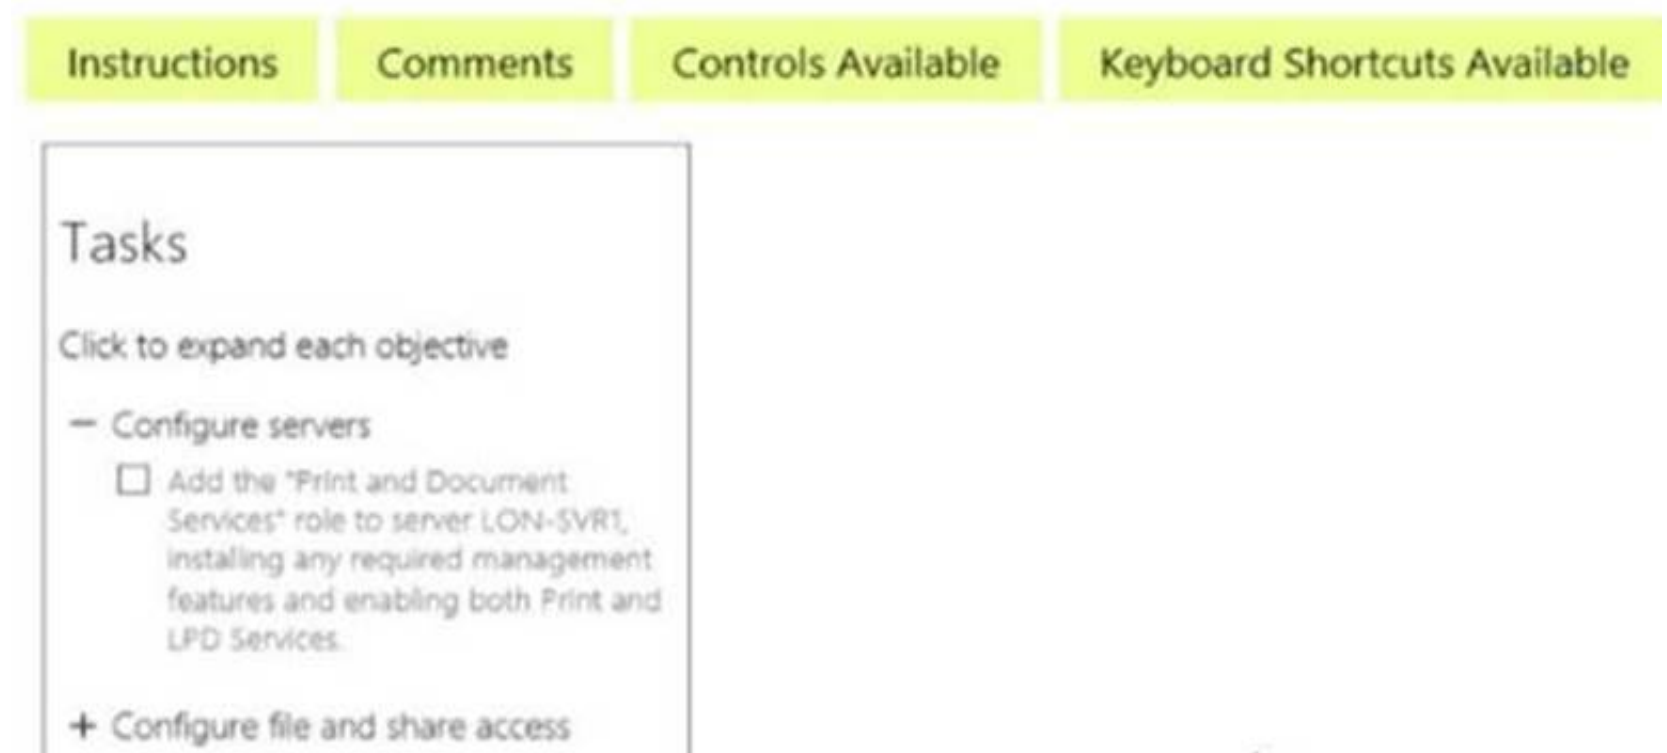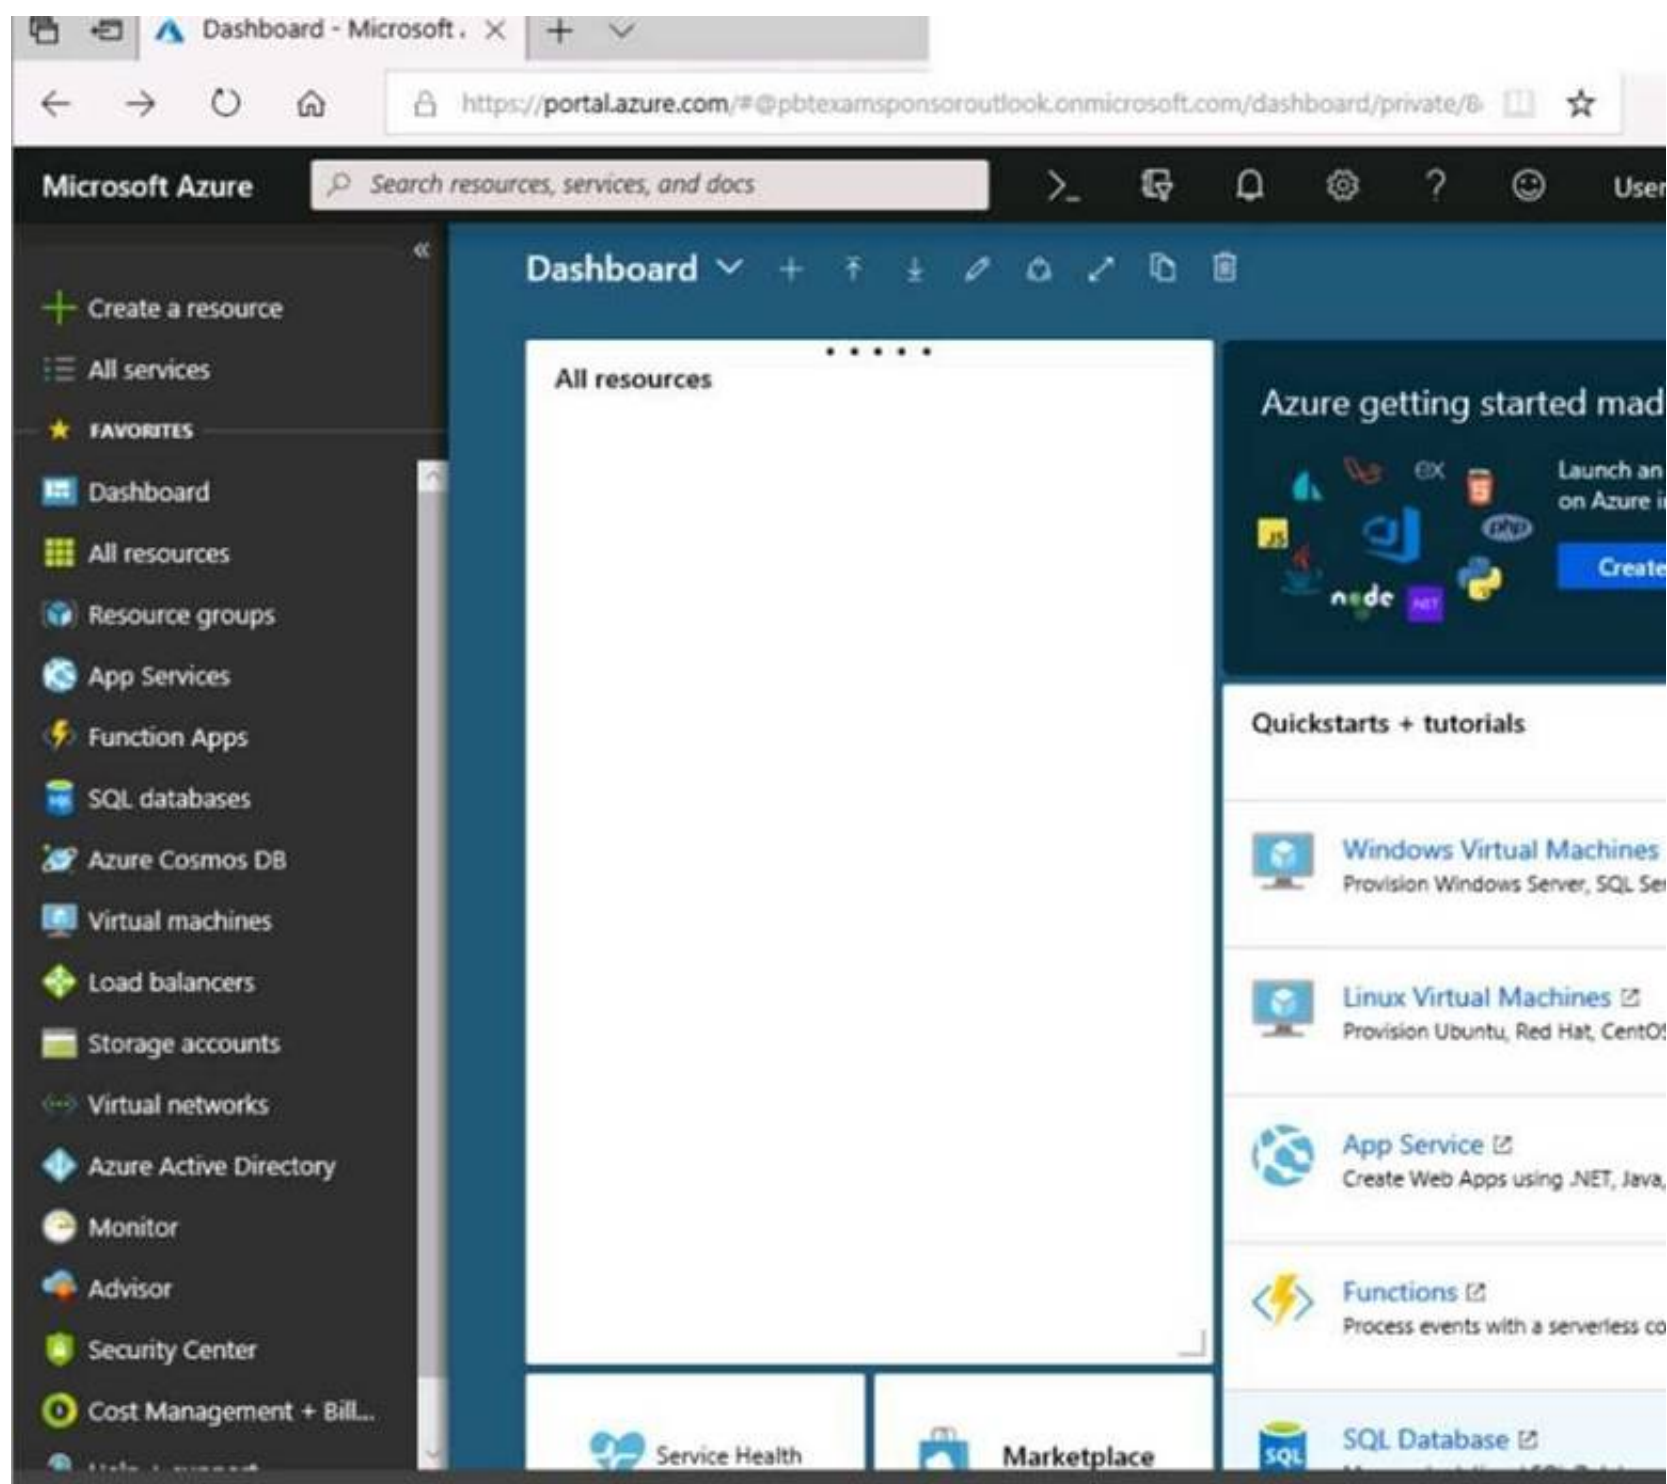

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occurs in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to protect on-premises virtual machines and Azure virtual machines by using Azure Backup. You need to prepare the backup infrastructure in Azure. The solution must minimize the cost of storing the backups in Azure.

What should you do from the Azure portal?


- A. Mastered
- B. Not Mastered

Answer: A


Explanation:

First, create Recovery Services vault.

Step 1: On the left-hand menu, select All services and in the services list, type Recovery Services. As you type, the list of resources filters. When you see Recovery Services vaults in the list, select it to open the Recovery Services vaults menu.

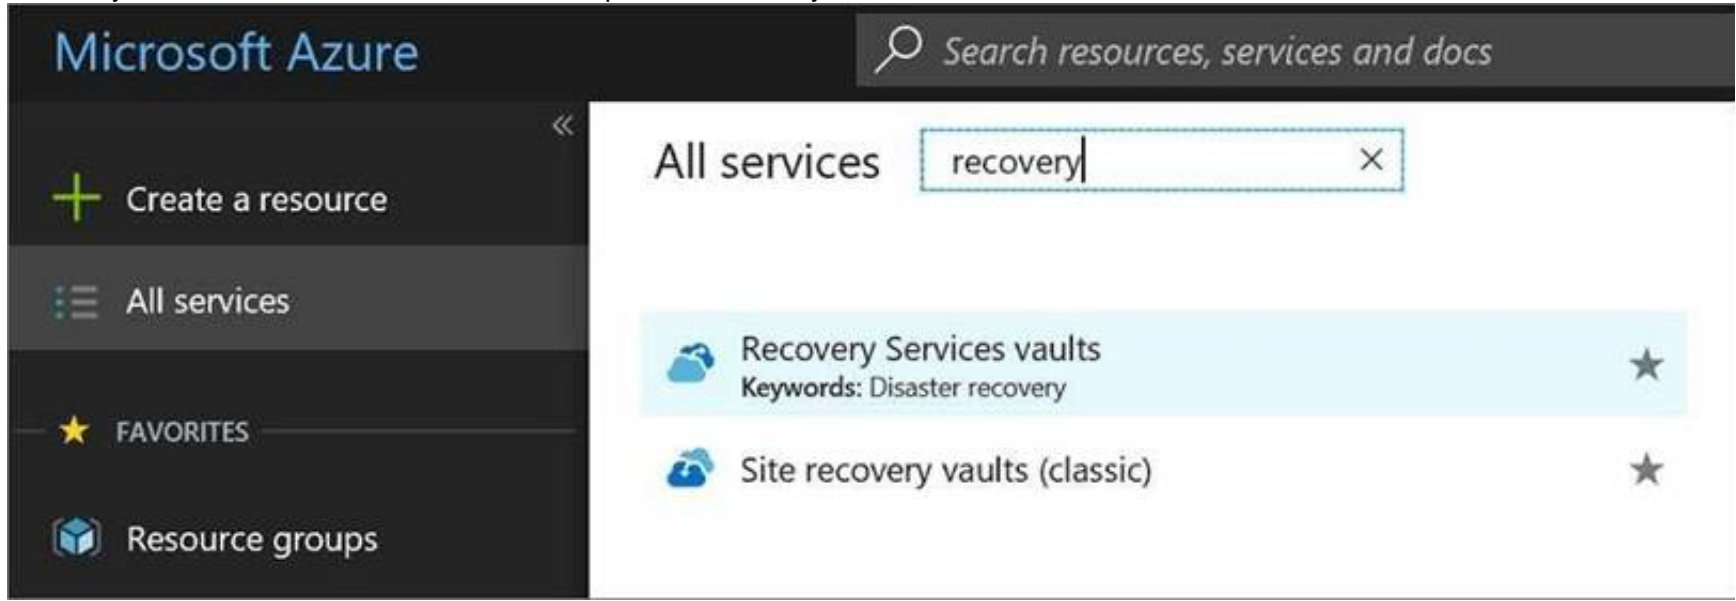

Step 2: In the Recovery Services vaults menu, click Add to open the Recovery Services vault menu.

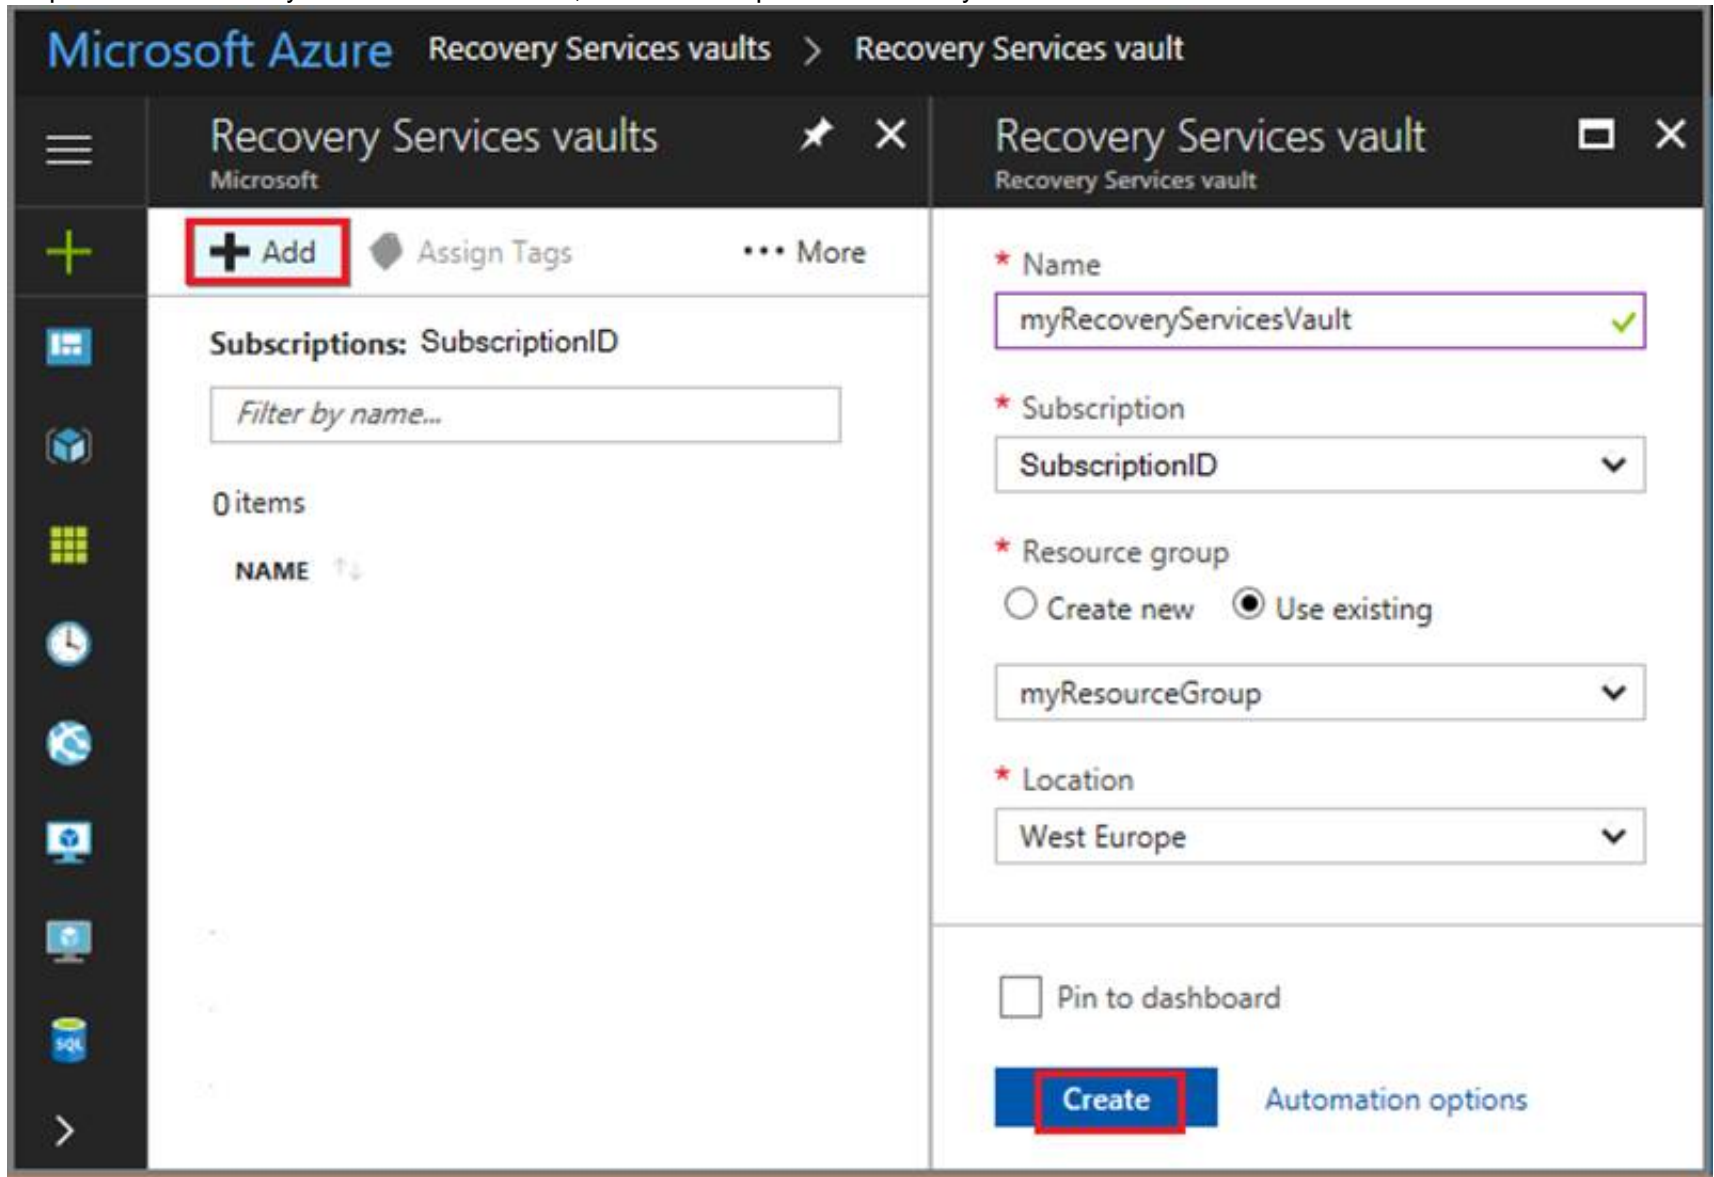

Step 3: In the Recovery Services vault menu, for example, Type myRecoveryServicesVault in Name.

The current subscription ID appears in Subscription. If you have additional subscriptions, you could choose another subscription for the new vault.

For Resource group select Use existing and choose myResourceGroup. If myResourceGroup doesn't exist, select Create new and type myResourceGroup.


From the Location drop-down menu, choose West Europe.


Click Create to create your Recovery Services vault.

References: <https://docs.microsoft.com/en-us/azure/backup/tutorial-backup-vm-at-scale>

NEW QUESTION 89

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

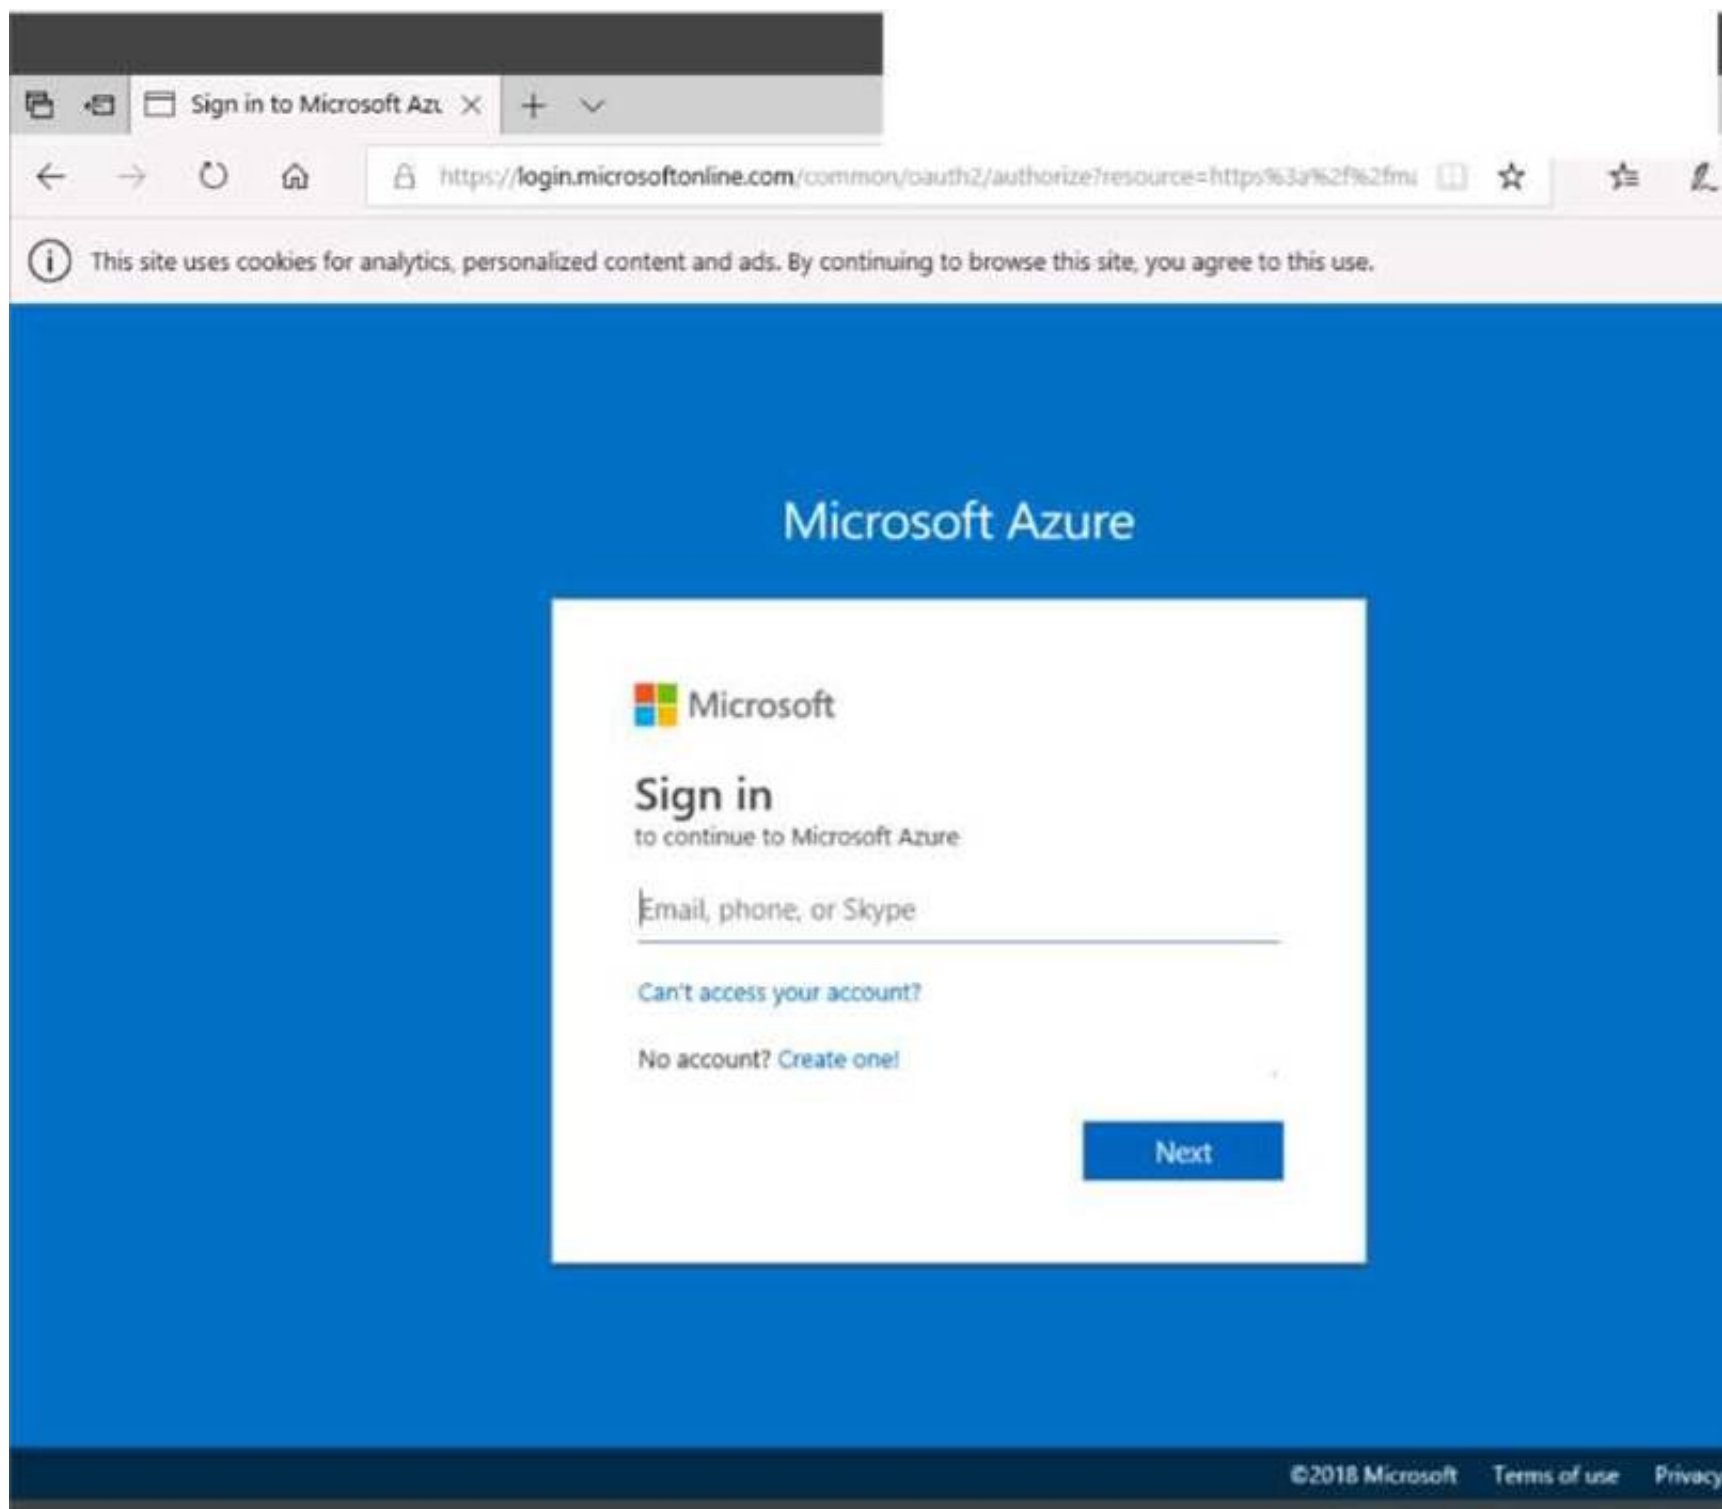

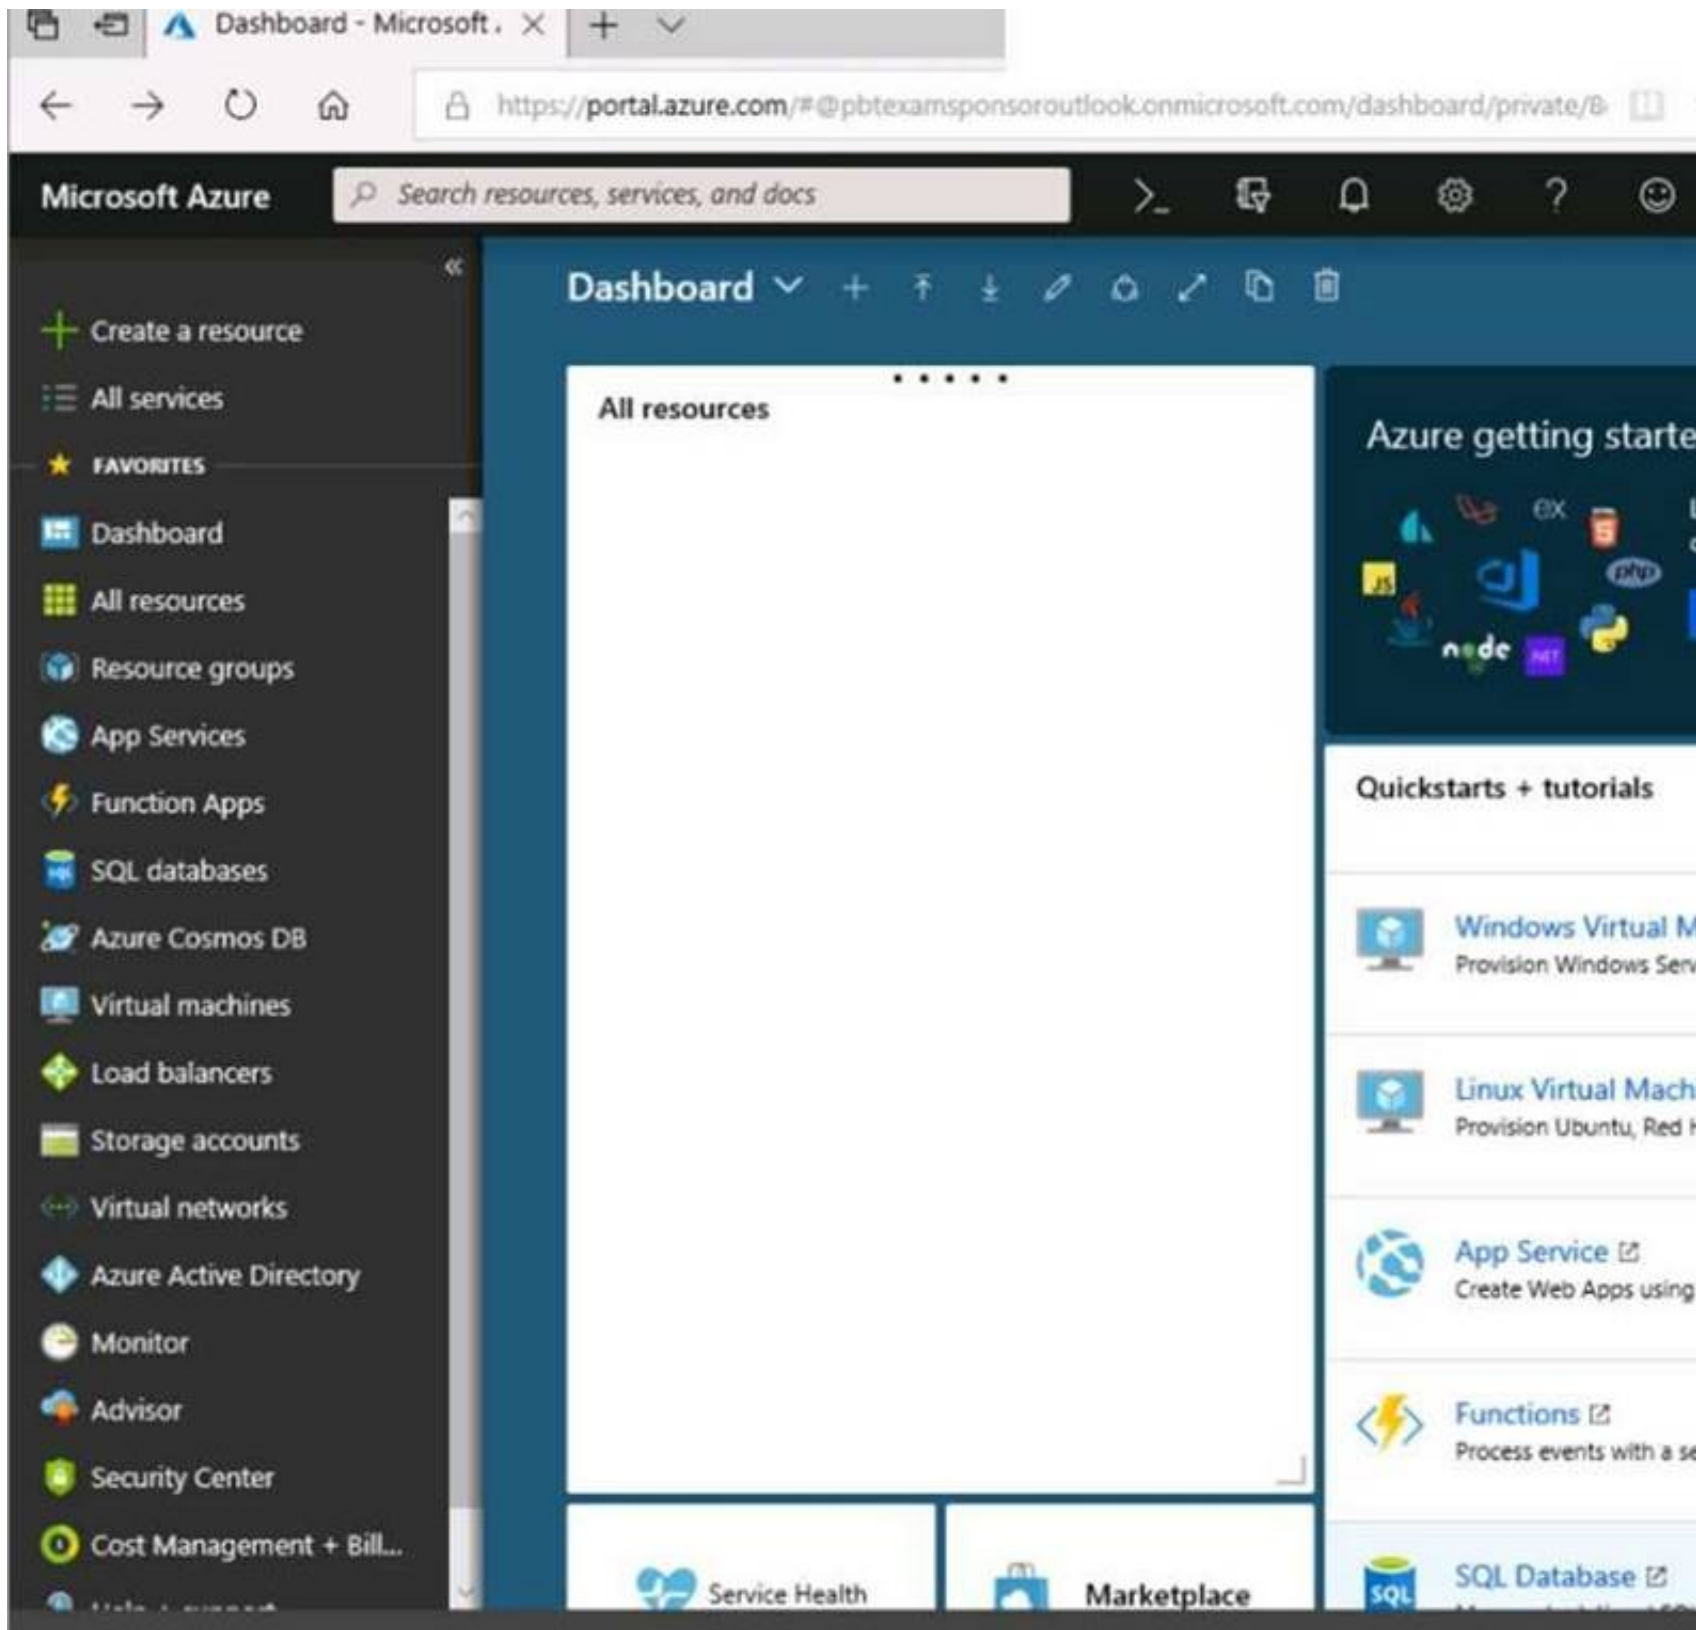

Instructions
Comments
Controls Available
Keyboard Shortcuts Available

Tasks

Click to expand each objective

- Configure servers
 - ☐ Add the "Print and Document Services" role to server LON-SVR1, installing any required management features and enabling both Print and LPD Services.
- + Configure file and share access

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.


You need to allow RDP connections over TCP port 3389 to VM1 from the internet. The solution must prevent connections from the Internet over all other TCP ports.
What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered


Answer: A

Explanation:

Step 1: Create a new network security group Step 2: Select your new network security group.

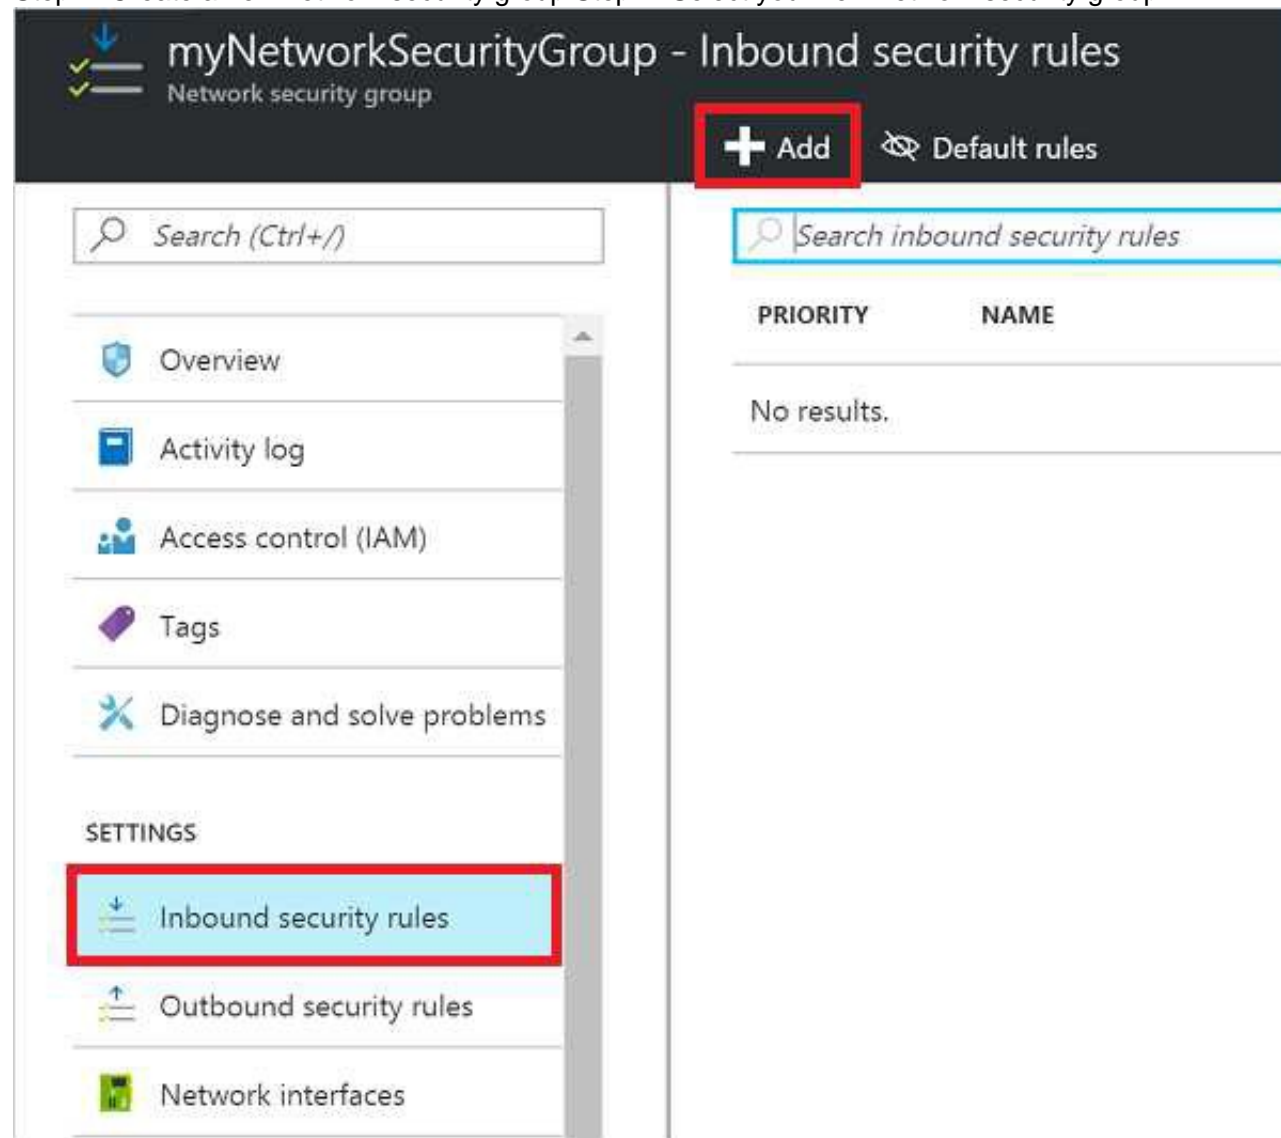


Step 3: Select Inbound security rules, . Under Add inbound security rule, enter the following
Destination: Select Network security group, and then select the security group you created previously. Destination port ranges: 3389
Protocol: Select TCP

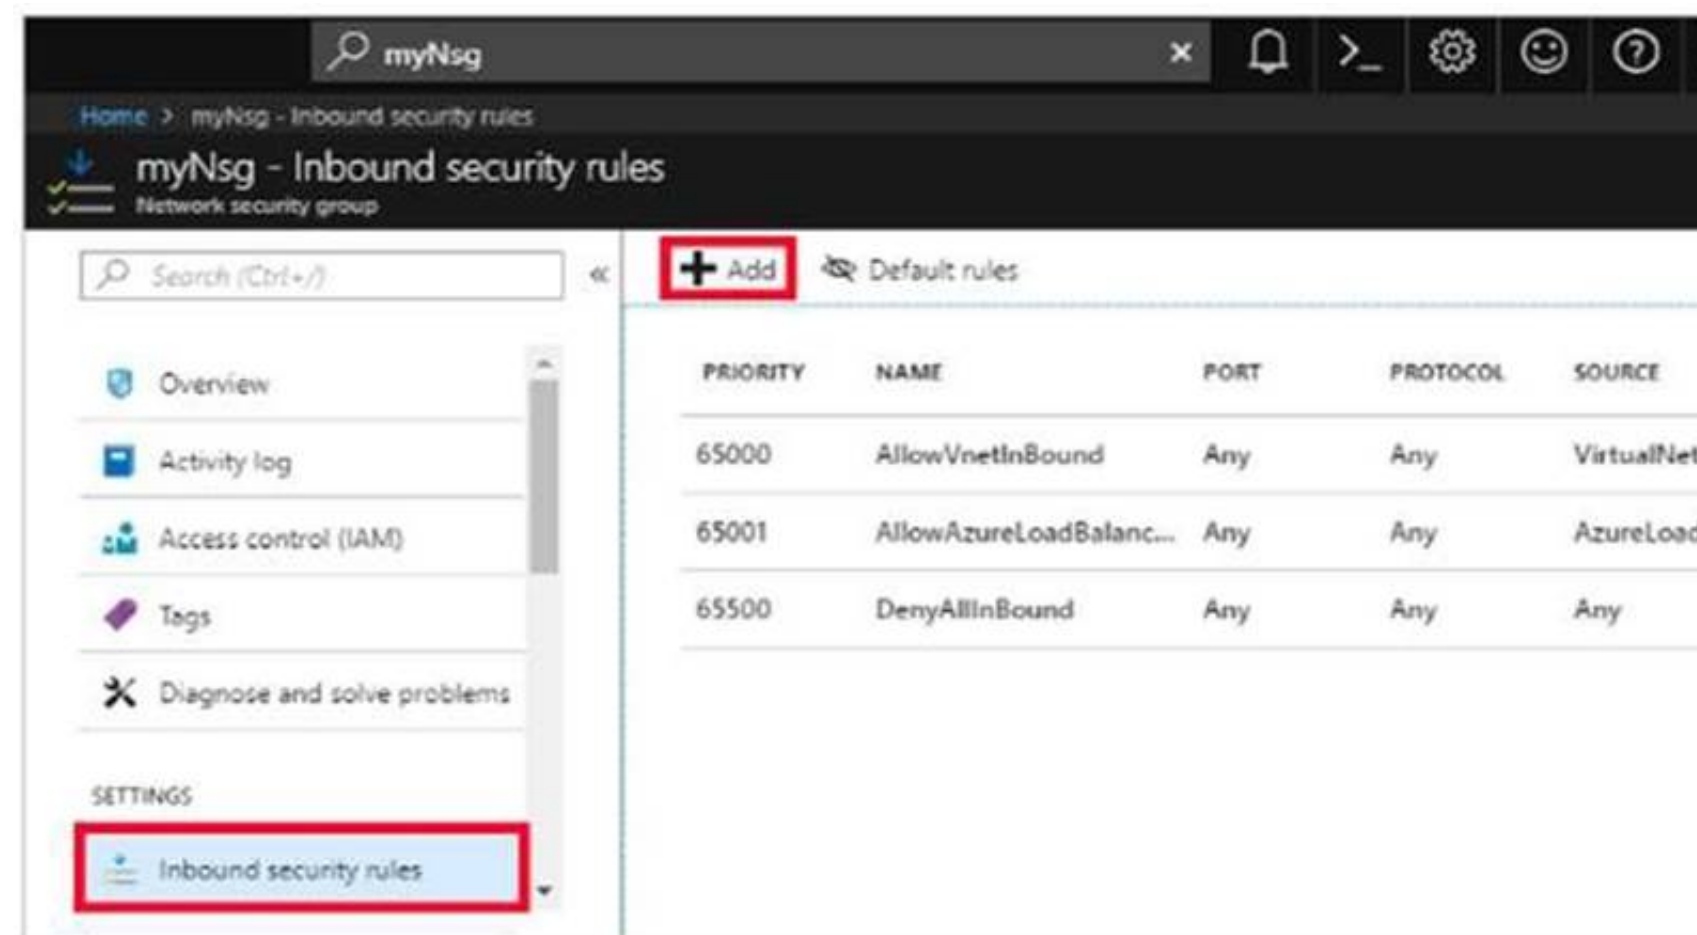


References: <https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-filter-network-traffic>

NEW QUESTION 91


Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

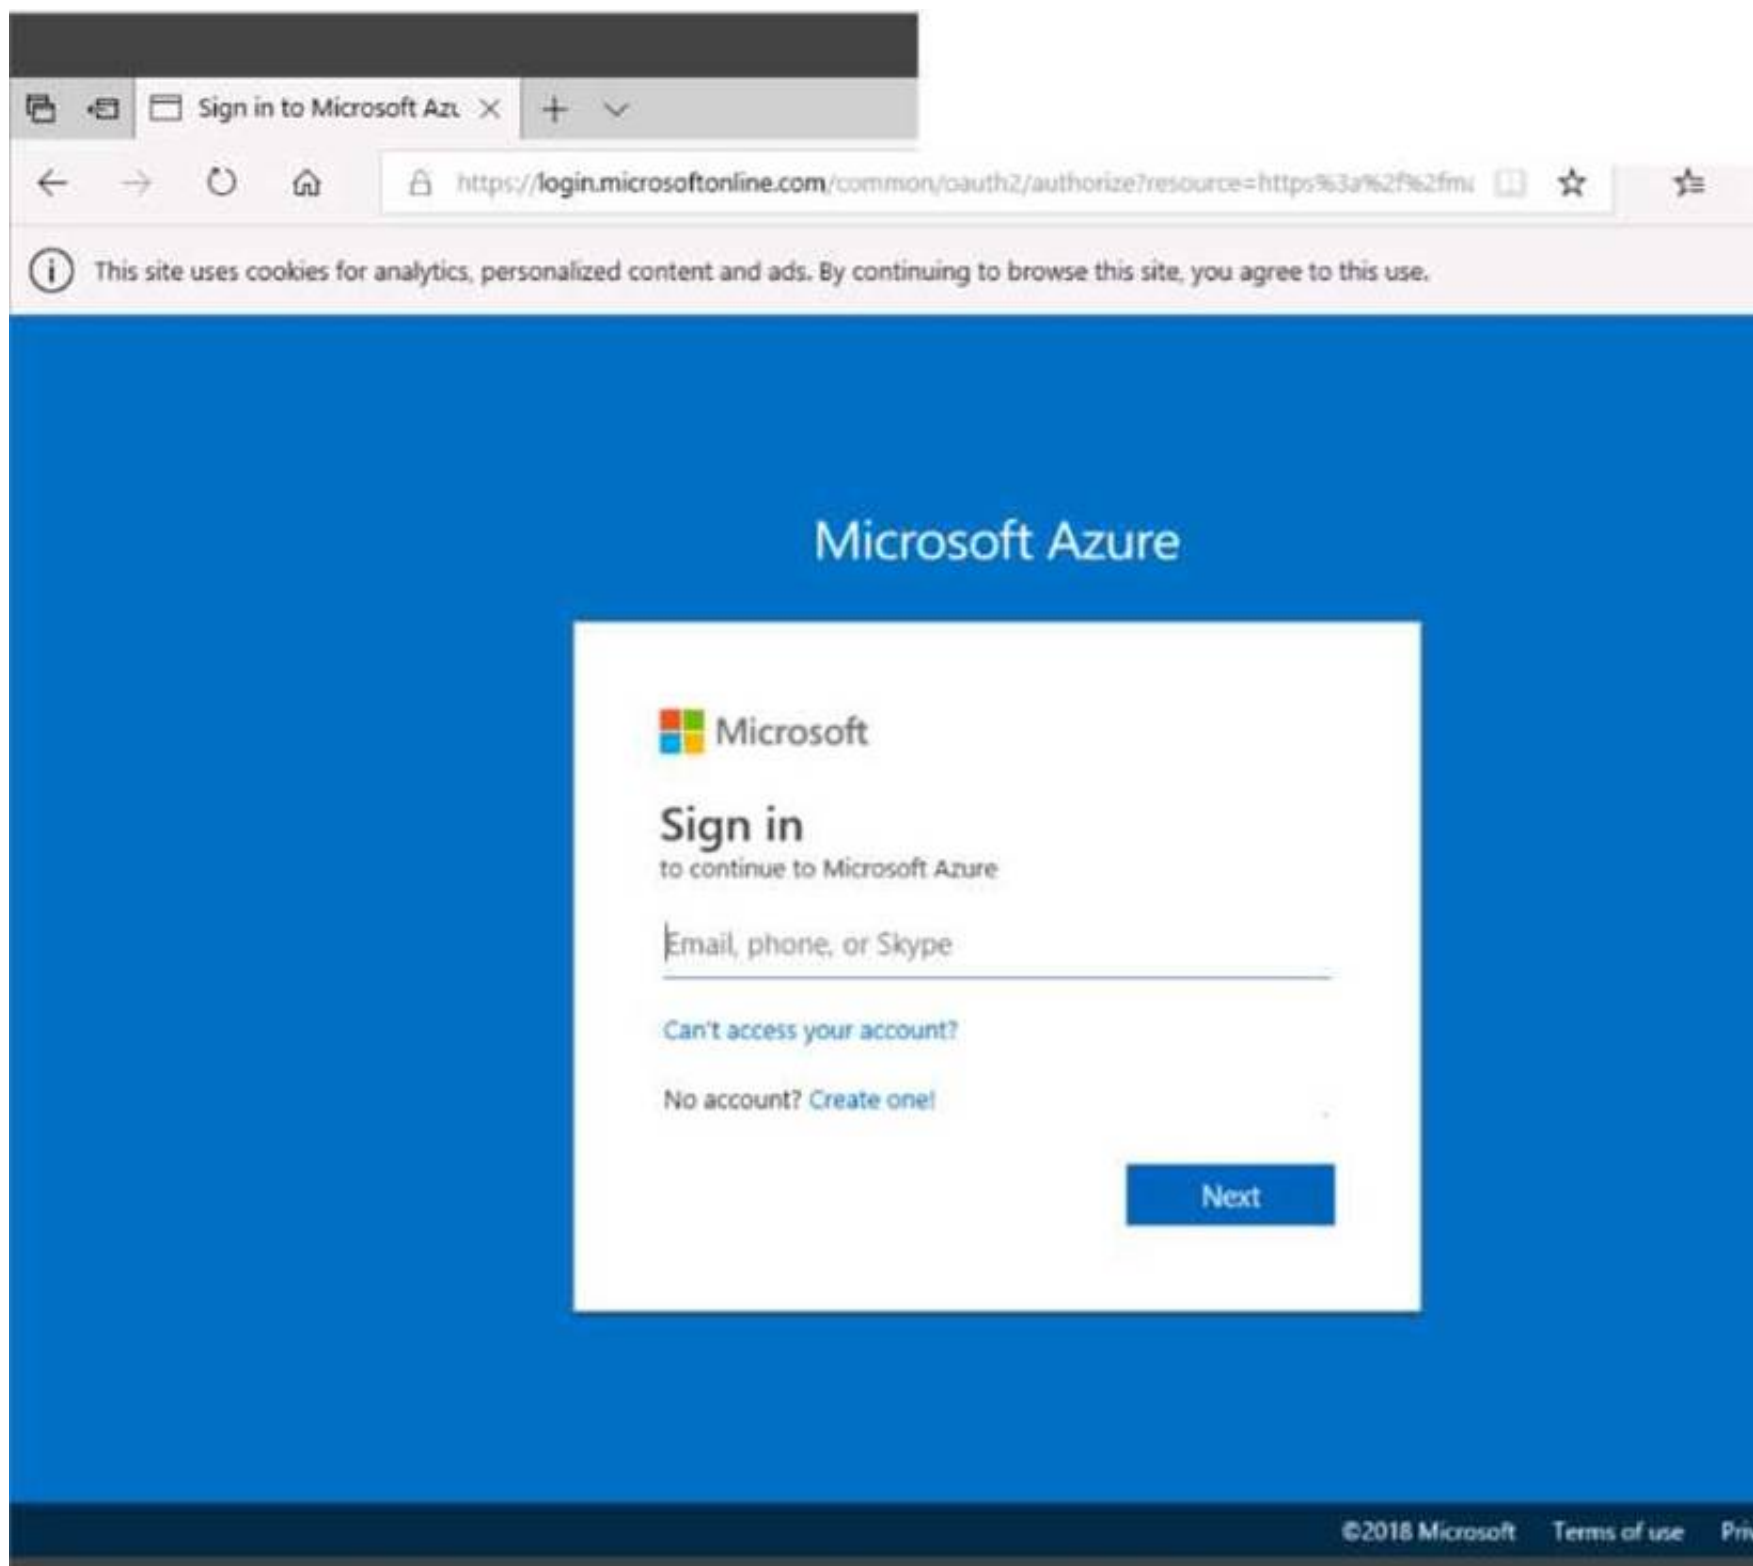

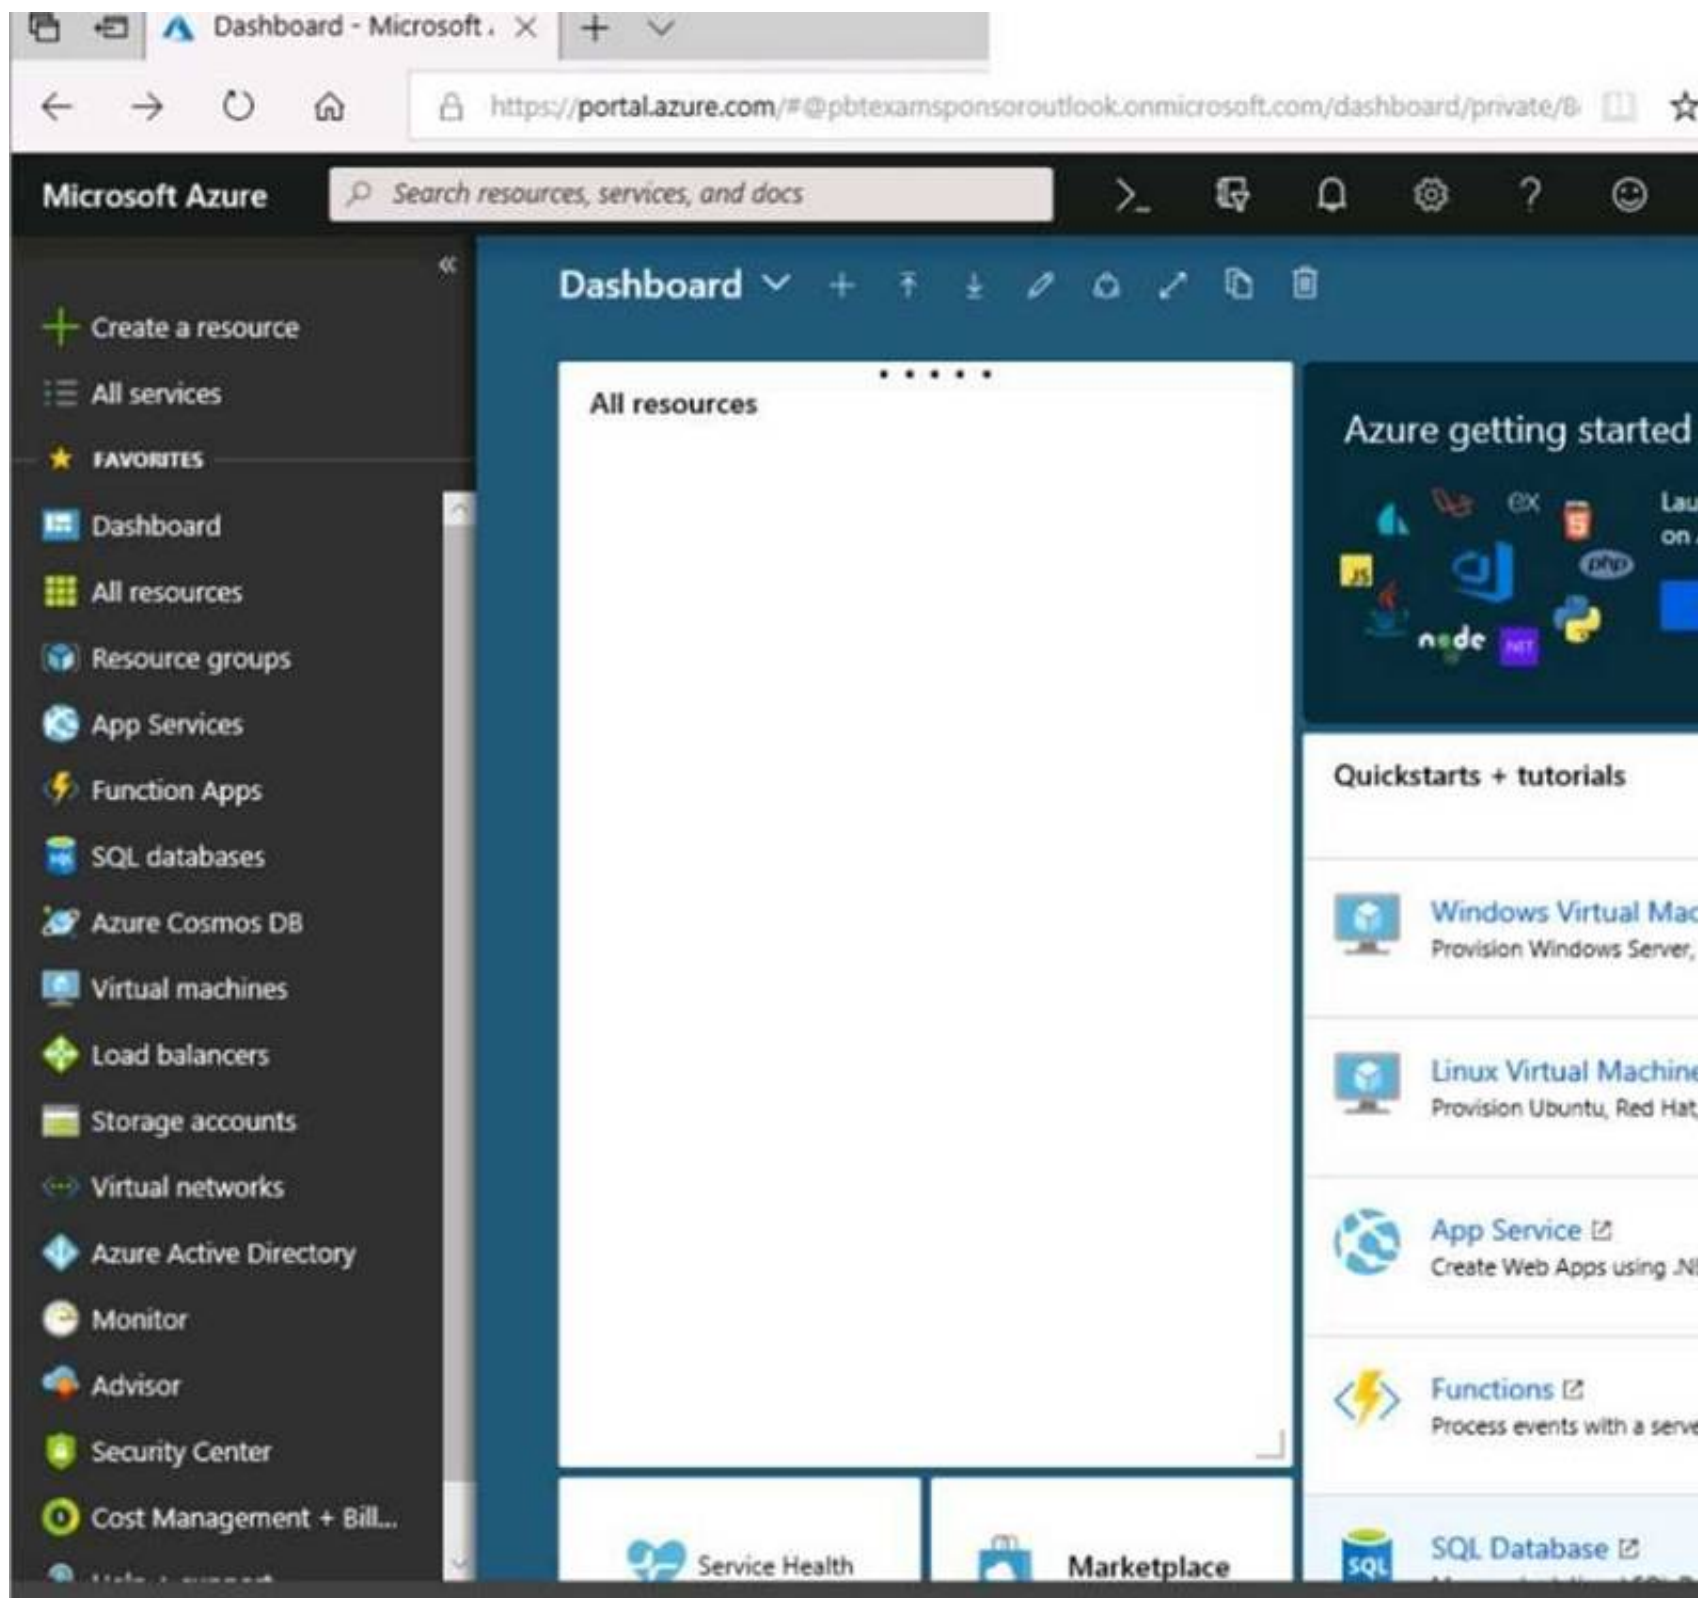

[Home](#) > [Storage accounts](#) > Create storage account

Create storage account

 Validation passed

[Basics](#) [Advanced](#) [Tags](#) **[Review + create](#)**

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Create

Previous

Next

[Download a template for automation](#)

[Home](#) > [Storage accounts](#) > Create storage account

Create storage account

[Basics](#)
[Advanced](#)
[Tags](#)
[Review + create](#)

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Submitting deployment...
Submitting the deployment template for 'corpdatalod7523690'.

[Home](#) > Microsoft.StorageAccount-20181011170335 - Overview

Microsoft.StorageAccount-20181011170335 - Overview

Deployment

«
Delete
Cancel
Redeploy
Refresh

Overview

Outputs

Inputs

Template

... Your deployment is underway

Check the status of your deployment, manage resources, or troubleshoot deployment issues. Pin this page to your dashboard to easily find it next time.

Deployment name: Microsoft.StorageAccount-20181011170335
 Subscription: [Microsoft AZ-100 5](#)
 Resource group: [corpdatalod7523690](#)


DEPLOYMENT DETAILS [\(Download\)](#)

Start time: 10/11/2018 5:04:06 PM
 Duration: 17 seconds
 Correlation ID: bd0806a4-d1bd-42db-be6b-55e0ec38f49b

RESOURCE	TYPE	STATUS	OPERATI...
No results.			

[Home](#) > [Virtual machines](#) > Create a virtual machine

Create a virtual machine

 Validation failed. Required information is missing or not valid.

[Basics](#) • [Disks](#) [Networking](#) [Management](#) [Guest config](#) [Tags](#) [Review + create](#)

PRODUCT DETAILS

Ubuntu Server 18.04 LTS

by Canonical

[Terms of use](#) | [Privacy policy](#)

Pricing not available for this offering

View [Pricing details](#) for more information.

Standard D2s v3

by Microsoft

[Terms of use](#) | [Privacy policy](#)

Subscription credits apply ⓘ

0.0960 USD/hr

[Pricing for other VM sizes](#)

TERMS

By clicking "Create", I (a) agree to the legal terms and privacy statement(s) associated with the Marketplace offering(s) listed above; (b) authorize Microsoft to bill my current payment method for the fees associated with the offering(s), with the same billing frequency as my Azure subscription; and (c) agree that Microsoft may share my contact, usage and transactional information with the provider(s) of the offering(s) for support, billing and other transactional activities. Microsoft does not provide rights for third-party offerings. See the [Azure Marketplace Terms](#) for additional details.

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to migrate a large amount of corporate data to Azure Storage and to back up files stored on old hardware to Azure Storage.

You need to create a storage account named corpdata7523690n1 in the corpdatalog7523690 resource group. The solution must meet the following requirements: Corpdata7523690n1 must be able to host the virtual disk files for Azure virtual machines. The cost of accessing the files must be minimized.

Replication costs must be minimized. What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: In the Azure portal, click All services. In the list of resources, type Storage Accounts. As you begin typing, the list filters based on your input. Select Storage Accounts.

Step 2: On the Storage Accounts window that appears, choose Add. Step 3: Select the subscription in which to create the storage account. Step 4: Under the Resource group field, select corpdatalog7523690.

Home > Create storage account

Create storage account

Basics

Advanced

Tags

Review + create

Azure Storage is a Microsoft-managed service providing cloud storage that is highly available, secure, durable, and scalable. Azure Storage includes Azure Blobs (objects), Azure Data Lake Storage Gen2, Azure Files, Azure Queues, and Azure Durable Functions. The pricing for your storage account depends on the usage and the options you choose below. [Learn more](#)

PROJECT DETAILS

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize a group of resources.

* Subscription

<your-subscription>

* Resource group

sample-resource-group

Create new

INSTANCE DETAILS

The default deployment model is Resource Manager. Select the classic deployment model instead. [Choose classic](#)

* Storage account name ⓘ

* Location

Performance ⓘ

Account kind ⓘ

Replication ⓘ

Access tier (default) ⓘ

☐ Cool

☒ Hot

A resource group is a container that holds related resources for an Azure solution.

* Name

your-resource-group

OK

Cancel

StorageV2 (general purpose v2)

Locally-redundant storage (LRS)

Review + create

Previous

Next : Advanced >

Step 5: Enter a name for your storage account: corpdata7523690n1

Step 6: For Account kind select: General-purpose v2 accounts (recommended for most scenarios) General-purpose v2 accounts is recommended for most scenarios. . General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices.

Step 7: For replication select: Read-access geo-redundant storage (RA-GRS)


Read-access geo-redundant storage (RA-GRS) maximizes availability for your storage account. RA- GRS provides read-only access to the data in the secondary location, in addition to geo-replication across two regions.


References:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-quickstart-create-account> <https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview>

NEW QUESTION 96

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

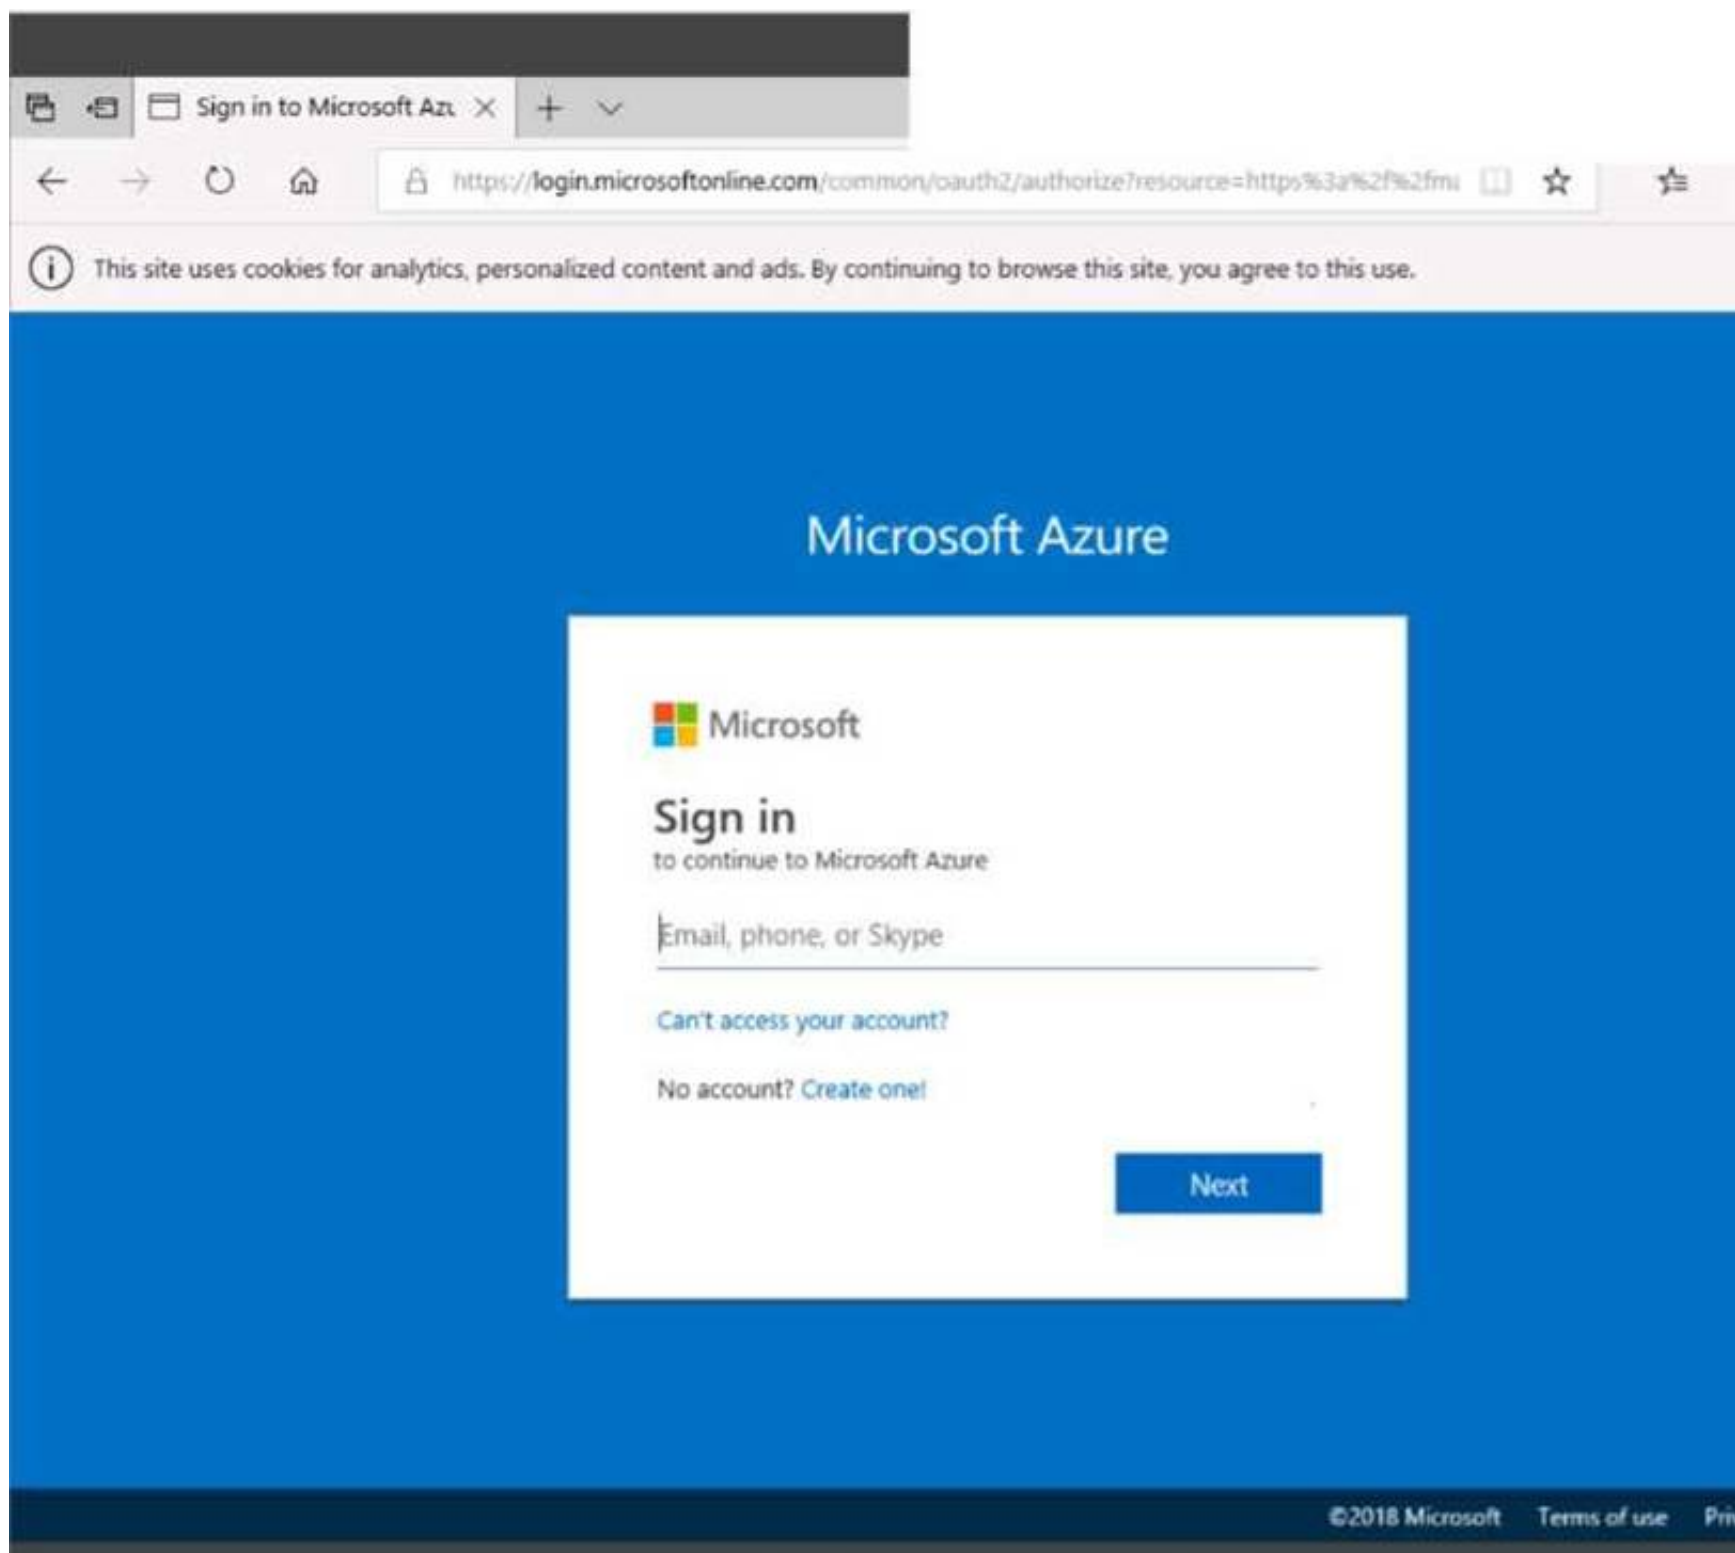

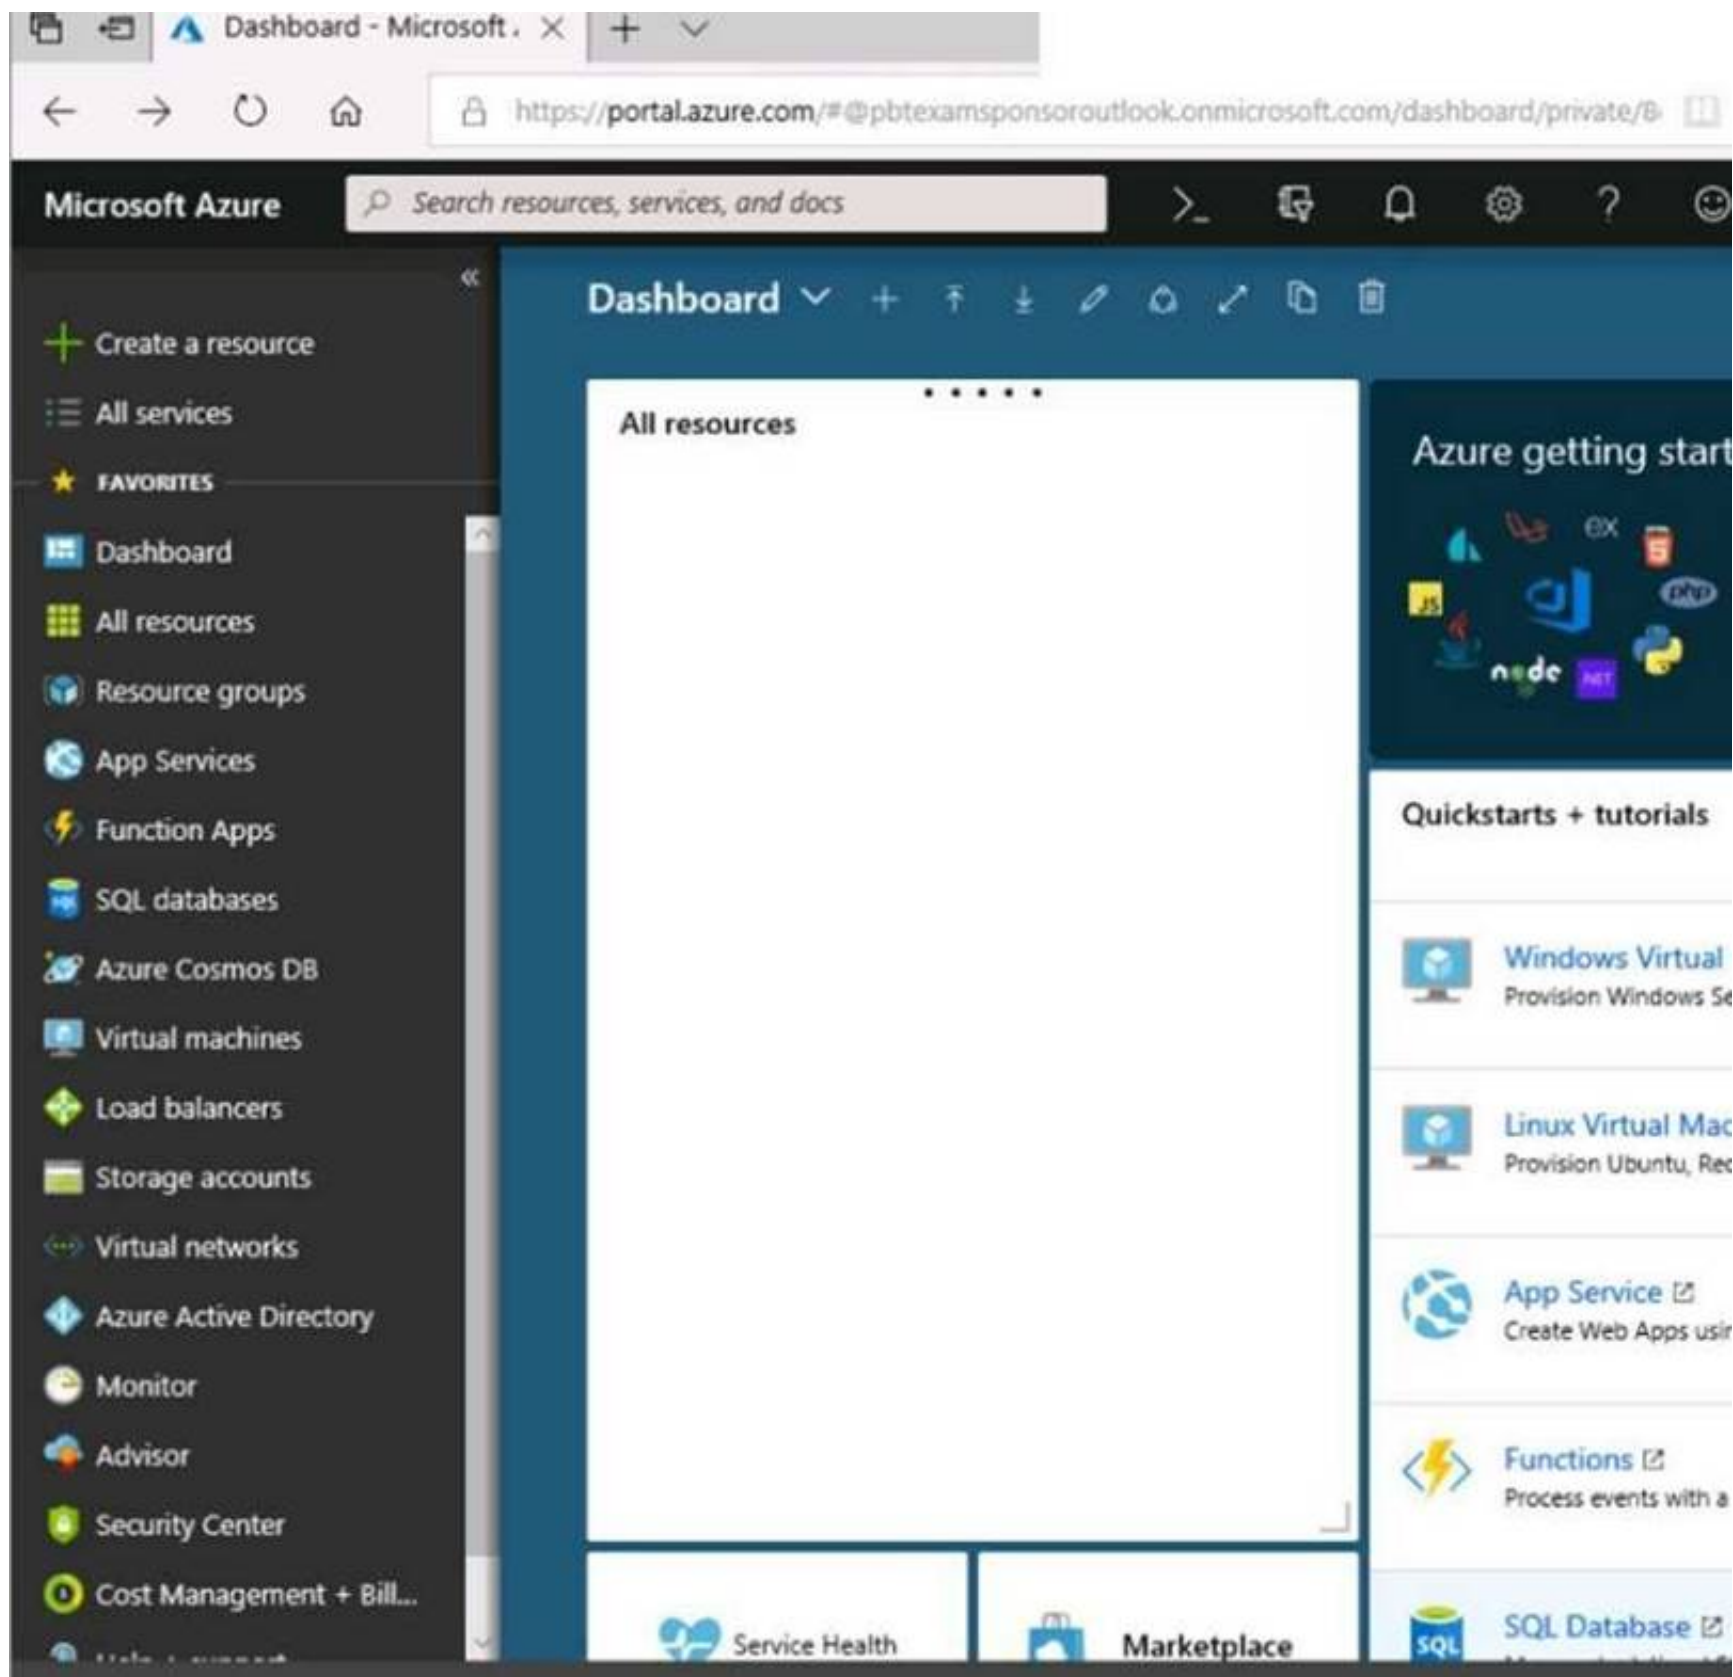

Home > Storage accounts > Create storage account

Create storage account

✓ Validation passed

BasicsAdvancedTagsReview + create

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Create

Previous

Next

[Download a template for automatic](#)

Home > Storage accounts > Create storage account

Create storage account

Basics

Advanced

Tags

Review + create

BASICS

Subscription

Resource group

Location

Storage account name

Deployment model

Account kind

Replication

Performance

Access tier (default)

Microsoft AZ-100 5

corpdatalod7523690

East US

corpdata7523690n1

Resource manager

StorageV2 (general purpose v2)

Read-access geo-redundant storage (RA-GRS)

Standard

Hot

ADVANCED

Secure transfer required

Hierarchical namespace

Enabled

Disabled

Submitting deployment...
Submitting the deployment template for res 'corpdatalod7523690'.

Home > Microsoft.StorageAccount-20181011170335 - Overview

Microsoft.StorageAccount-20181011170335 - Overview

Deployment

Search (Ctrl+ /)

Overview

Outputs

Inputs

Template

Delete

Cancel

Redeploy

Refresh

Your deployment is underway

Check the status of your deployment, manage resources, or troubleshoot deployment issues. Pin this page to your dashboard to easily find it next time.

Deployment

name: Microsoft.StorageAccount-20181011170335

Subscription: Microsoft AZ-100 5

Resource group: corpdatalod7523690

DEPLOYMENT DETAILS (Download)

Start time: 10/11/2018 5:04:06 PM

Duration: 17 seconds

Correlation ID: bd0806a4-d1bd-42db-be6b-55e0ec38f49b

RESOURCE

TYPE

STATUS

OPERATI...


No results.

The Leader of IT Certification

visit - https://www.certleader.com

Home > Virtual machines > Create a virtual machine

Create a virtual machine

 Validation failed. Required information is missing or not valid.

Basics • Disks Networking Management Guest config Tags Review + create

PRODUCT DETAILS

Ubuntu Server 18.04 LTS

by Canonical

[Terms of use](#) | [Privacy policy](#)

Standard D2s v3

by Microsoft

[Terms of use](#) | [Privacy policy](#)

Pricing not available for this offering

View [Pricing details](#) for more information.

Subscription credits apply ⓘ

0.0960 USD/hr

[Pricing for other VM sizes](#)

TERMS

By clicking "Create", I (a) agree to the legal terms and privacy statement(s) associated with the Marketplace offering(s) listed above; (b) authorize Microsoft to bill my current payment method for the fees associated with the offering(s), with the same billing frequency as my Azure subscription; and (c) agree that Microsoft may share my contact, usage and transactional information with the provider(s) of the offering(s) for support, billing and other transactional activities. Microsoft does not provide rights for third-party offerings. See the [Azure Marketplace Terms](#) for additional details.

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occurs in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to move backup files and documents from an on-premises Windows file server to Azure Storage. The backup files will be stored as blobs.

You need to create a storage account named corpdata7523690n2. The solution must meet the following requirements:

? Ensure that the documents are accessible via drive mappings from Azure virtual machines that run Windows Server 2016.

? Provide the highest possible redundancy for the documents.

? Minimize storage access costs.

What should you do from the Azure portal?

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Step 1: In the Azure portal, click All services. In the list of resources, type Storage Accounts. As you begin typing, the list filters based on your input. Select Storage Accounts.

Step 2: On the Storage Accounts window that appears, choose Add. Step 3: Select the subscription in which to create the storage account.

Step 4: Under the Resource group field, select Create New. Create a new Resource

Home > Create storage account

Create storage account

[Basics](#)
[Advanced](#)
[Tags](#)
[Review + create](#)

Azure Storage is a Microsoft-managed service providing cloud storage that is highly available, secure, durable, scalable, and redundant. Azure Storage includes Azure Blobs (objects), Azure Data Lake Storage Gen2, Azure Files, Azure Queues, and Azure Tables. The cost of your storage account depends on the usage and the options you choose below. [Learn more](#)

PROJECT DETAILS

Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

* Subscription

<your-subscription>

* Resource group

sample-resource-group

Create new

INSTANCE DETAILS

The default deployment model is Resource Manager. You can also use the classic deployment model instead. [Choose classic](#)

* Storage account name ⓘ

* Location

Performance ⓘ

Account kind ⓘ

StorageV2 (general purpose v2)

Replication ⓘ

Locally-redundant storage (LRS)

Access tier (default) ⓘ

☐ Cool
☒ Hot

A resource group is a container that holds related resources for an Azure solution.

* Name

your-resource-group ✓

OK Cancel

Review + create

Previous

Next : Advanced >

Step 5: Enter a name for your storage account: corpdata7523690n2

Step 6: For Account kind select: General-purpose v2 accounts (recommended for most scenarios) General-purpose v2 accounts is recommended for most scenarios. . General-purpose v2 accounts deliver the lowest per-gigabyte capacity prices for Azure Storage, as well as industry-competitive transaction prices.

Step 7: For replication select: Read-access geo-redundant storage (RA-GRS)


Read-access geo-redundant storage (RA-GRS) maximizes availability for your storage account. RA-GRS provides read-only access to the data in the secondary location, in addition to geo-replication across two regions.


References:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-quickstart-create-account> <https://docs.microsoft.com/en-us/azure/storage/common/storage-account-overview>

NEW QUESTION 99

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

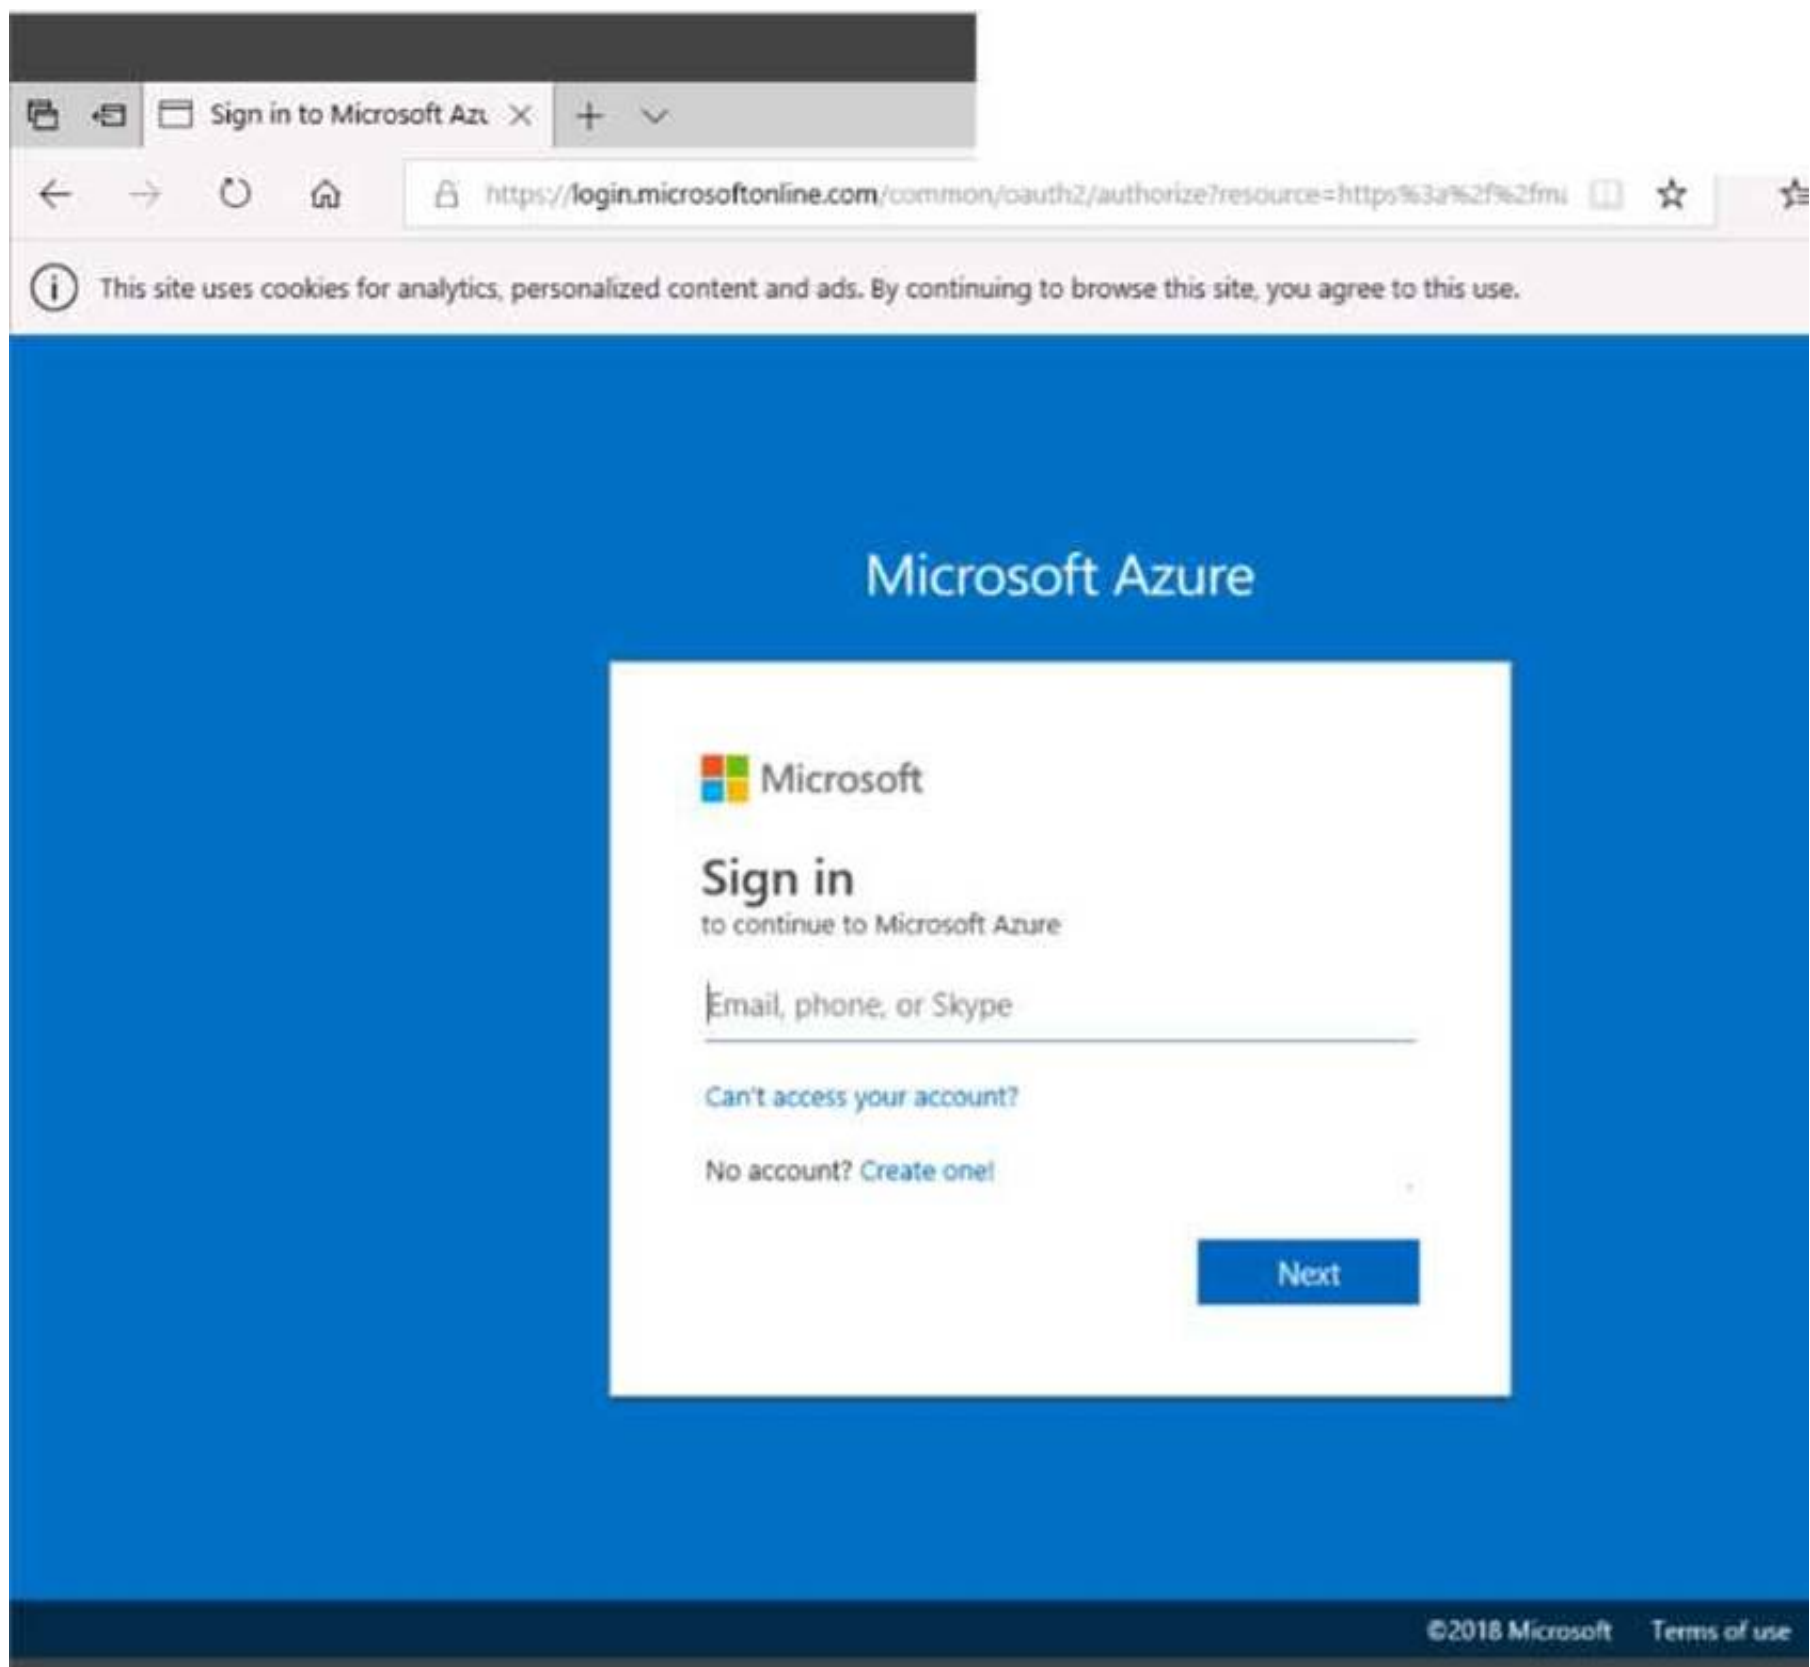

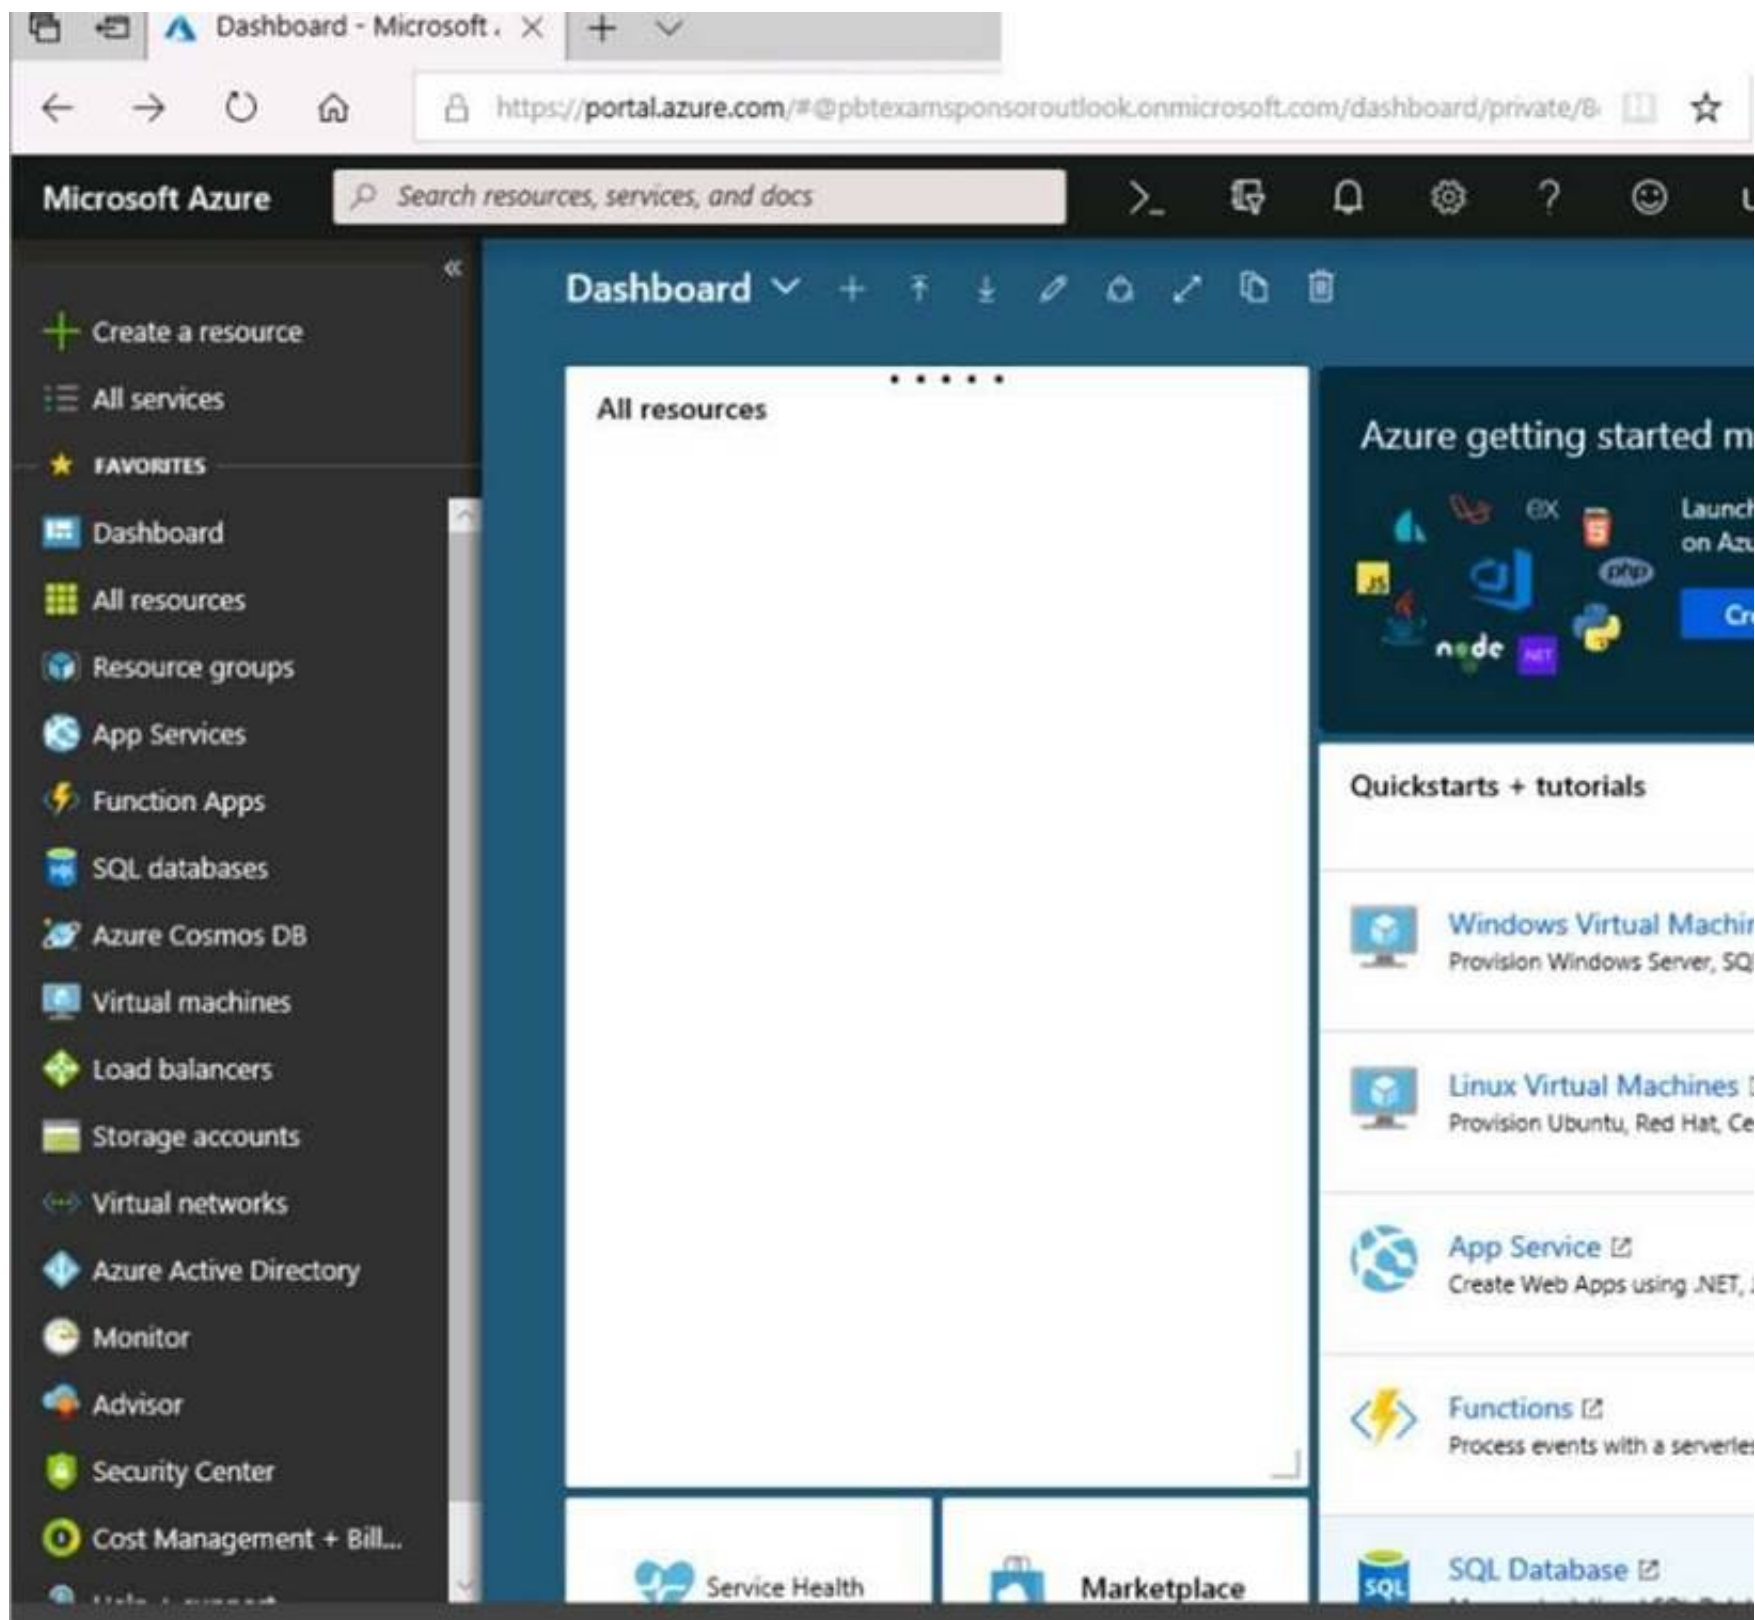

Create storage account

✓

Validation passed

BasicsAdvancedTagsReview + create

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Create

Previous

Next

Download a template for automation

Home > Storage accounts > Create storage account

Create storage account

Submitting deployment...

Submitting the deployment template f
'corpdatalod7523690'.

Basics

Advanced

Tags

Review + create

BASICS

Subscription

Resource group

Location

Storage account name

Deployment model

Account kind

Replication

Performance

Access tier (default)

Microsoft AZ-100 5

corpdatalod7523690

East US

corpdata7523690n1

Resource manager

StorageV2 (general purpose v2)

Read-access geo-redundant storage
(RA-GRS)

Standard

Hot

ADVANCED

Secure transfer required

Hierarchical namespace

Enabled

Disabled

Delete Cancel Redeploy Refresh

- Your deployment is underway

Check the status of your deployment, manage resources, or troubleshoot deployment issues. Pin this page to your dashboard to easily find it next time.



Deployment
name: Microsoft.StorageAccount-
20181011170335
Subscription: Microsoft AZ-100 5
Resource group: corpdatalod7523690

DEPLOYMENT DETAILS (Download)

Start time: 10/11/2018 5:04:06 PM

Duration: 17 seconds

Correlation ID: bd0806a4-d1bd-42db-be6b-55e0ec38f49b

RESOURCE	TYPE	STATUS	OPERATI...
No results.			

Home > Virtual machines > Create a virtual machine

Create a virtual machine

! Validation failed. Required information is missing or not valid.

Basics • Disks Networking Management Guest config Tags Review + create

PRODUCT DETAILS

Ubuntu Server 18.04 LTS

by Canonical

[Terms of use](#) | [Privacy policy](#)

Standard D2s v3

by Microsoft

[Terms of use](#) | [Privacy policy](#)

Pricing not available for this offering

View [Pricing details](#) for more information.

Subscription credits apply ⓘ

0.0960 USD/hr

[Pricing for other VM sizes](#)

TERMS

By clicking "Create", I (a) agree to the legal terms and privacy statement(s) associated with the Marketplace offering(s) listed above; (b) authorize Microsoft to bill my current payment method for the fees associated with the offering(s), with the same billing frequency as my Azure subscription; and (c) agree that Microsoft may share my contact, usage and transactional information with the provider(s) of the offering(s) for support, billing and other transactional activities. Microsoft does not provide rights for third-party offerings. See the [Azure Marketplace Terms](#) for additional details.

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to create 100 Azure virtual machines on each of the following three virtual networks:

? VNET1005a

? VNET1005b

? VNET1005c

All the network traffic between the three virtual networks will be routed through VNET1005 a.

You need to create the virtual networks, and then to ensure that all the Azure virtual machines can connect to other virtual machines by using their private IP address. The solution must NOT require any virtual network gateways and must minimize costs.

What should you do from the Azure portal before you configure IP routing?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Click Create a resource in the portal.

Step 2: Enter Virtual network in the Search the Marketplace box at the top of the New pane that appears. Click Virtual network when it appears in the search results.

Step 3: Select Classic in the Select a deployment model box in the Virtual Network pane that appears, then click Create.

Step 4: Enter the following values on the Create virtual network (classic) pane and then click Create: Name: VNET1005a

Address space: 10.0.0.0/16 Subnet name: subnet0 Resource group: Create new

Subnet address range: 10.0.0.0/24


Subscription and location: Select your subscription and location.


Step 5: Repeat steps 3-5 for VNET1005b (10.1.0.0/16, 10.1.0.0/24), and for VNET1005c 10.2.0.0/16, 10.2.0.0/24).

References: <https://docs.microsoft.com/en-us/azure/virtual-network/create-virtual-network-classic>

NEW QUESTION 101

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

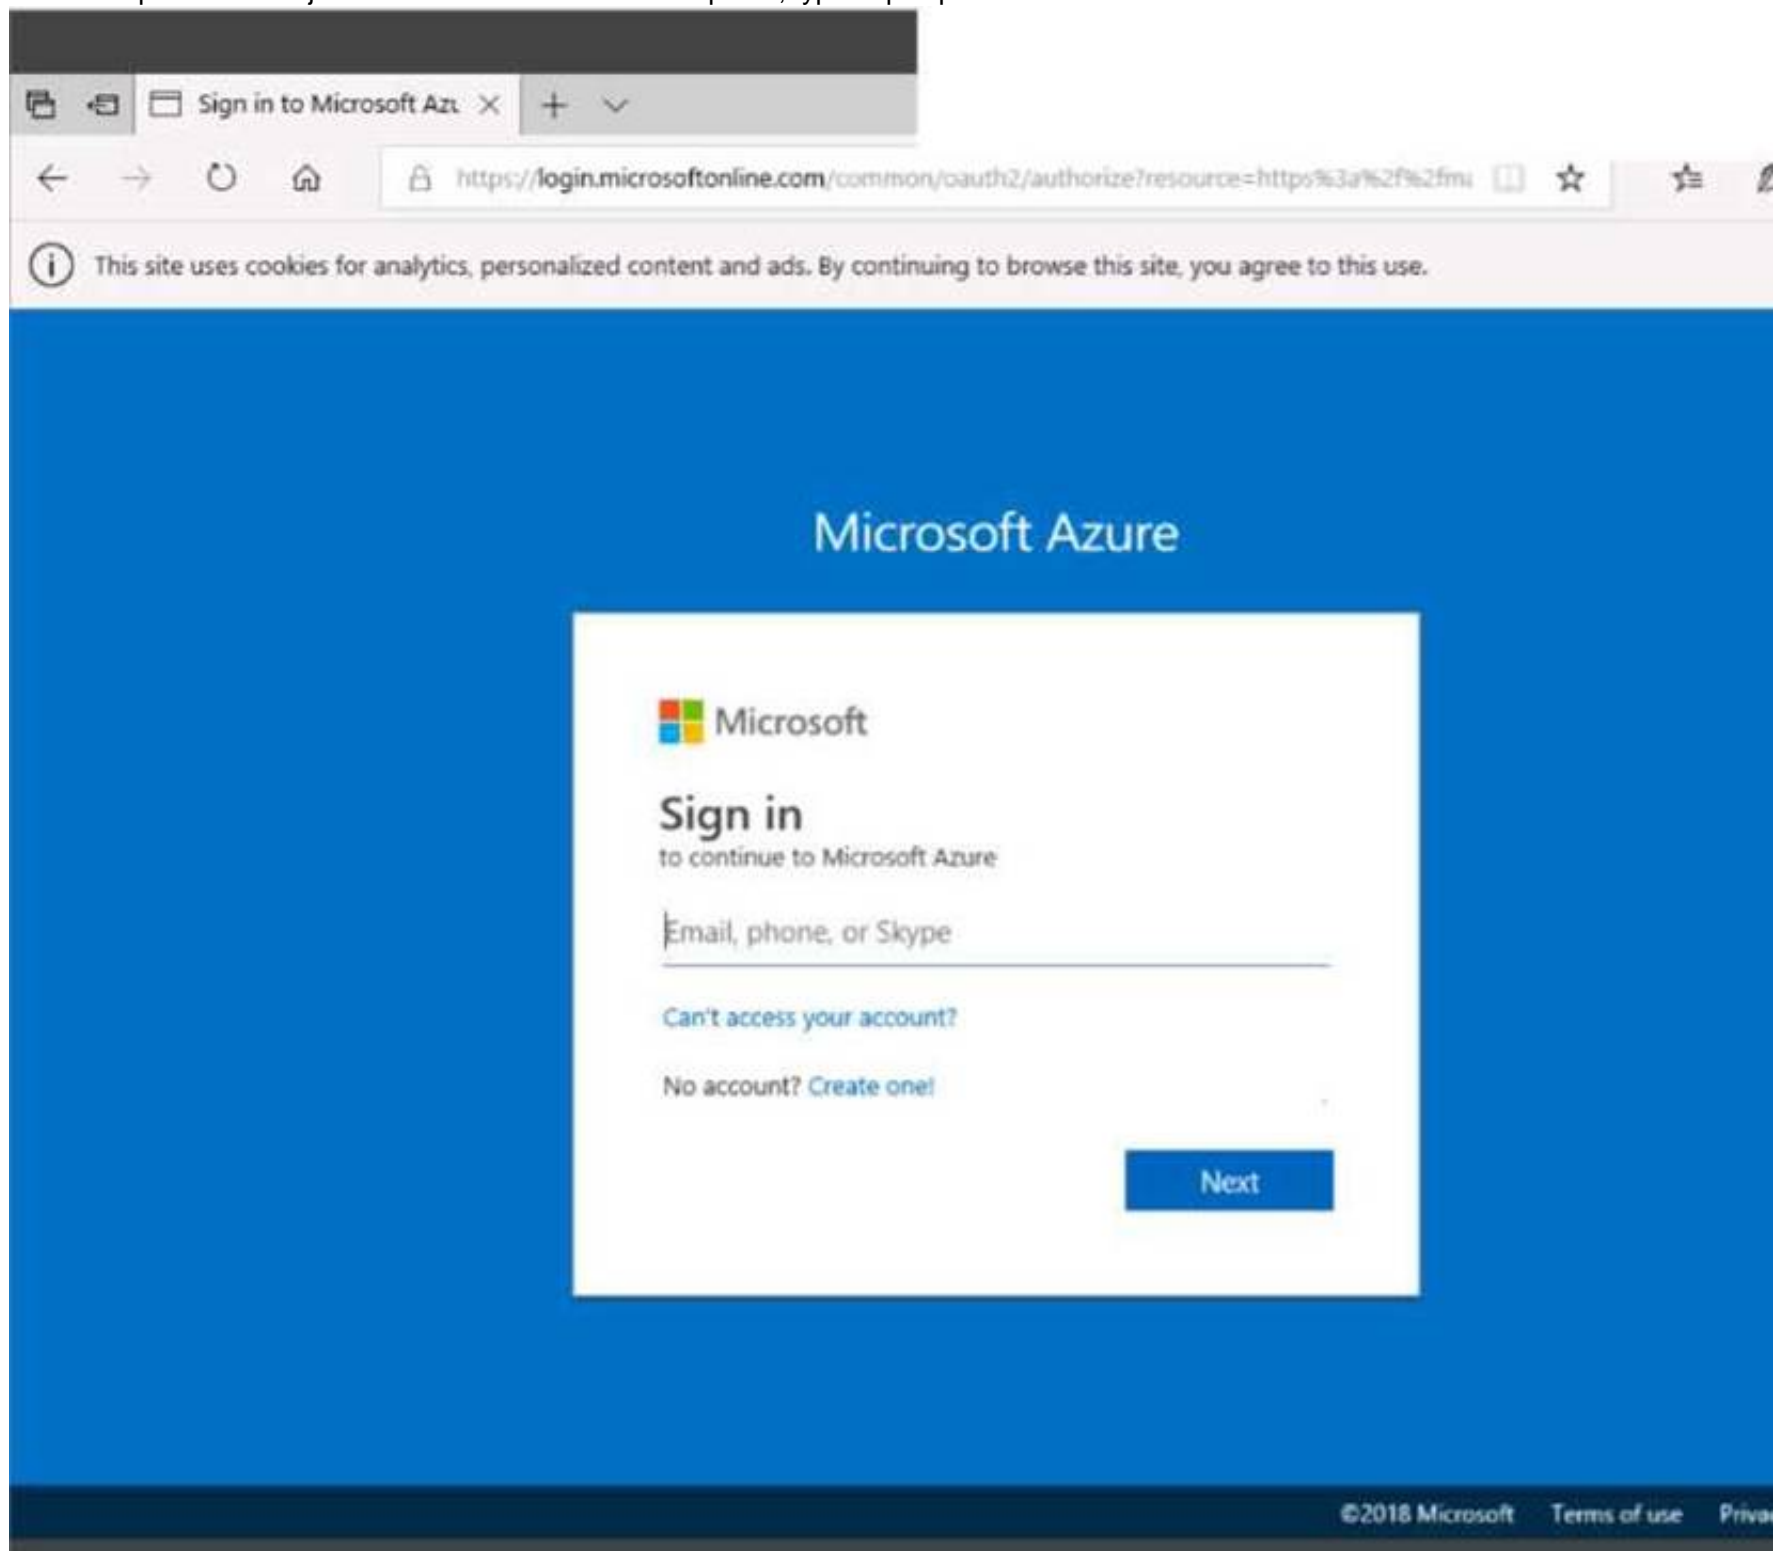

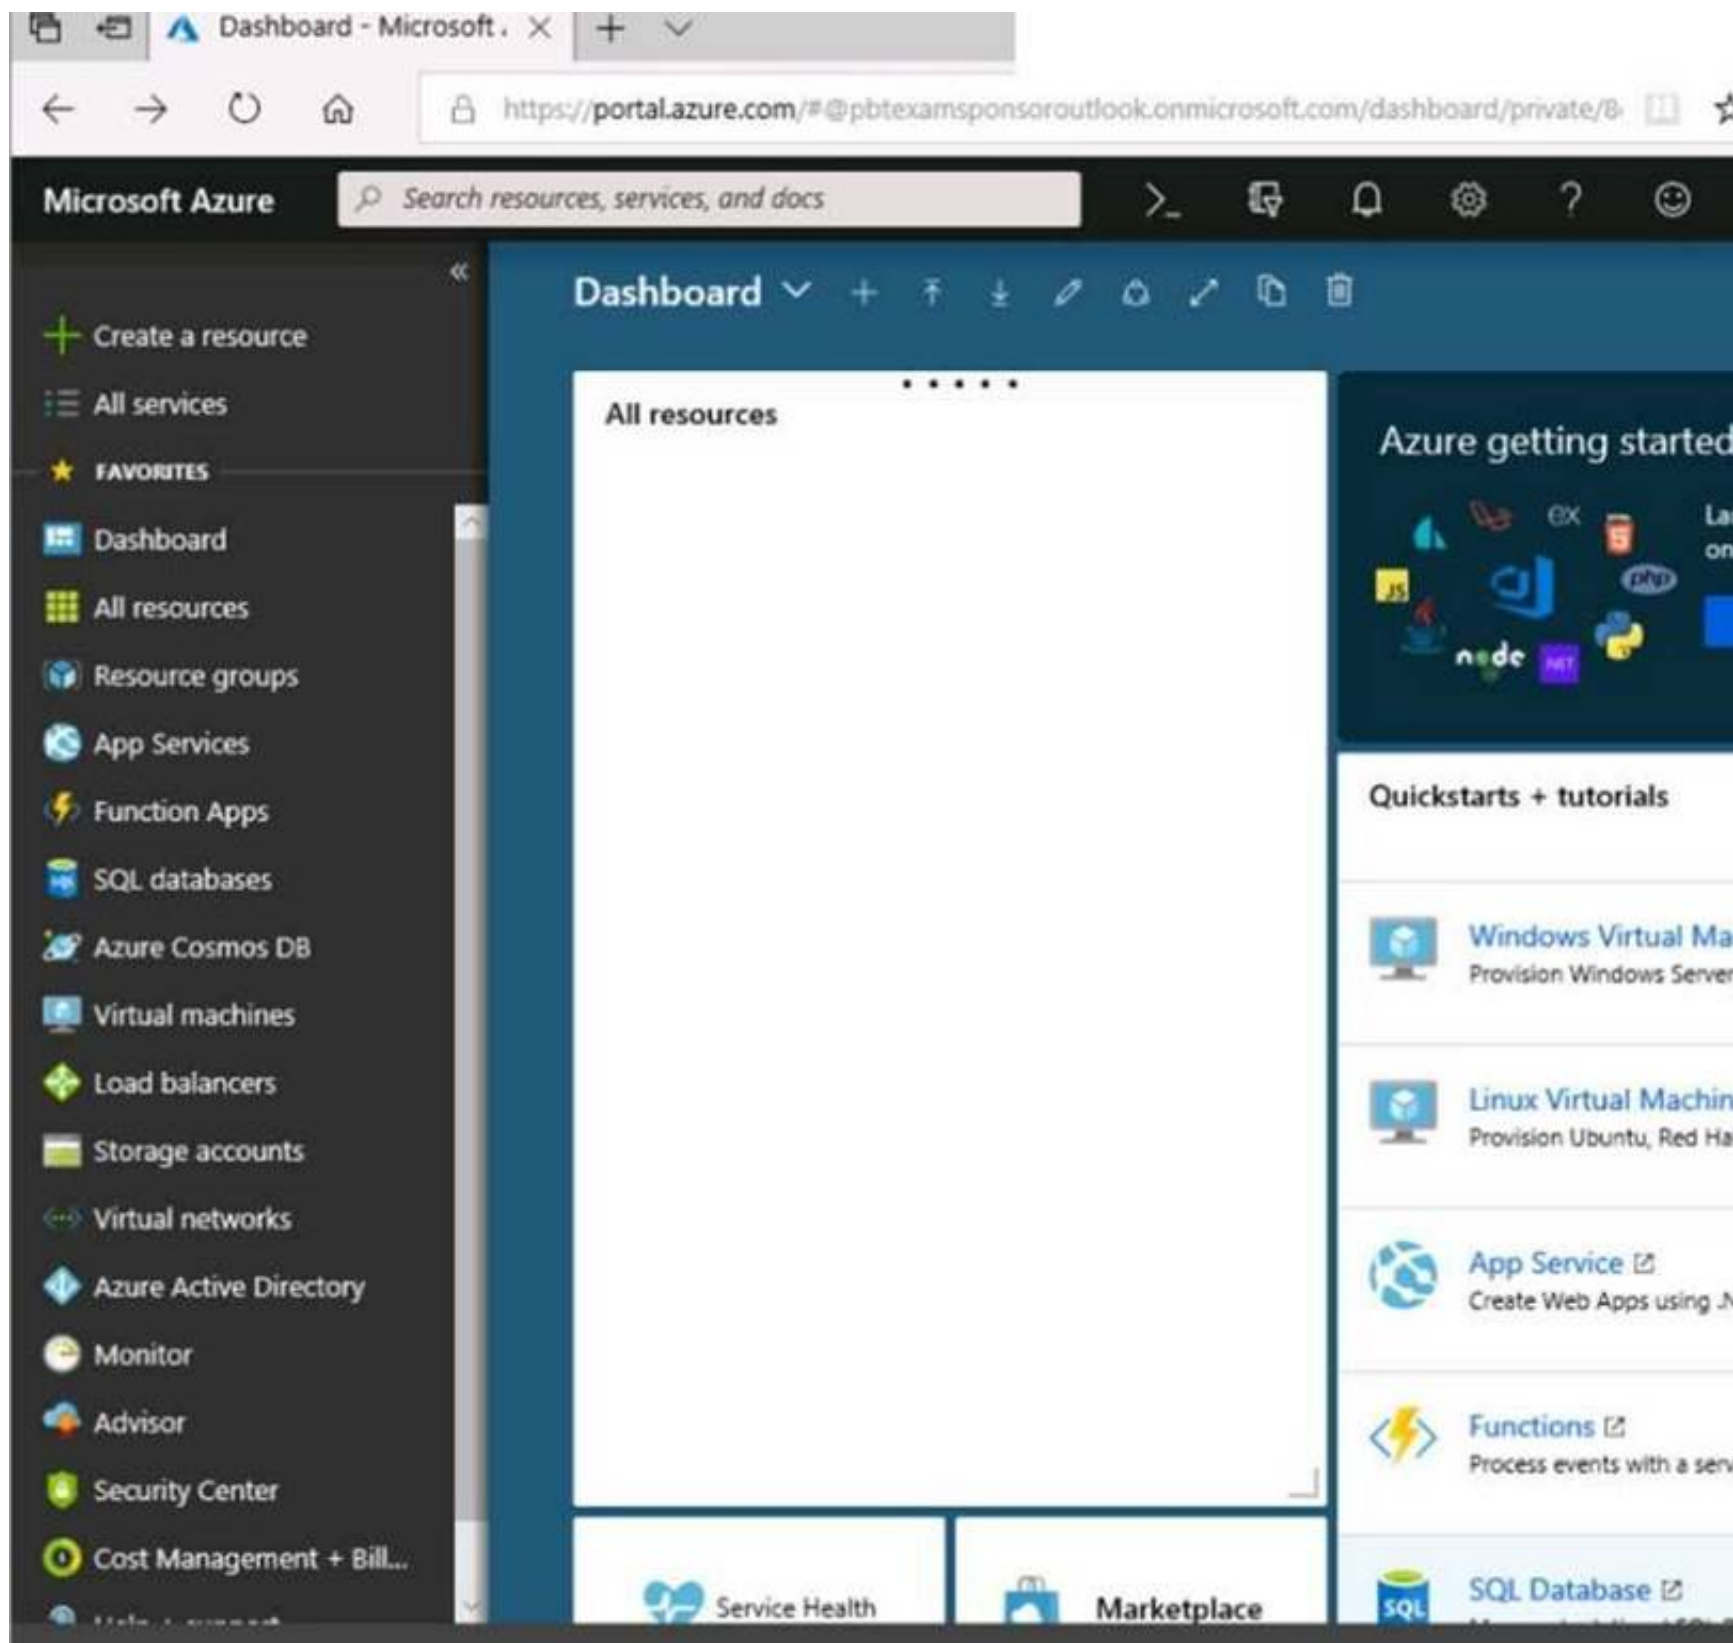

Create storage account

✓

Validation passed

BasicsAdvancedTagsReview + create

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Create

Previous

Next

Download a template for automation

Home > Storage accounts > Create storage account

Create storage account

Submitting deployment...

Submitting the deployment template 'corpdatalod7523690'.

Basics

Advanced

Tags

Review + create

BASICS

Subscription

Resource group

Location

Storage account name

Deployment model

Account kind

Replication

Performance

Access tier (default)

Microsoft AZ-100 5

corpdatalod7523690

East US

corpdata7523690n1

Resource manager

StorageV2 (general purpose v2)

Read-access geo-redundant storage (RA-GRS)

Standard

Hot

ADVANCED

Secure transfer required

Hierarchical namespace

Enabled

Disabled

[Home](#) > Microsoft.StorageAccount-20181011170335 - Overview

Microsoft.StorageAccount-20181011170335 - Overview


Deployment

«
Delete
Cancel
Redeploy
Refresh

- Overview
- Outputs
- Inputs
- Template

Your deployment is underway

Check the status of your deployment, manage resources, or troubleshoot deployment issues. Pin this page to your dashboard to easily find it next time.



Deployment name: Microsoft.StorageAccount-20181011170335

Subscription: [Microsoft AZ-100 5](#)

Resource group: [corpdatalod7523690](#)

DEPLOYMENT DETAILS ([Download](#))

Start time: 10/11/2018 5:04:06 PM


Duration: 17 seconds

Correlation ID: bd0806a4-d1bd-42db-be6b-55e0ec38f49b

RESOURCE	TYPE	STATUS	OPERATI...
No results.			

[Home](#) > [Virtual machines](#) > Create a virtual machine

Create a virtual machine

 Validation failed. Required information is missing or not valid.

[Basics](#) • [Disks](#) [Networking](#) [Management](#) [Guest config](#) [Tags](#) [Review + create](#)

PRODUCT DETAILS

Ubuntu Server 18.04 LTS

by Canonical

[Terms of use](#) | [Privacy policy](#)

Standard D2s v3

by Microsoft

[Terms of use](#) | [Privacy policy](#)

Pricing not available for this offering

View [Pricing details](#) for more information.

Subscription credits apply 

0.0960 USD/hr

[Pricing for other VM sizes](#)

TERMS

By clicking "Create", I (a) agree to the legal terms and privacy statement(s) associated with the Marketplace offering(s) listed above; (b) authorize Microsoft to bill my current payment method for the fees associated with the offering(s), with the same billing frequency as my Azure subscription; and (c) agree that Microsoft may share my contact, usage and transactional information with the provider(s) of the offering(s) for support, billing and other transactional activities. Microsoft does not provide rights for third-party offerings. See the [Azure Marketplace Terms](#) for additional details.

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to deploy several Azure virtual machines and to connect them to a virtual network named VNET1007.

You need to ensure that future virtual machines in VNET1007 can register their name in an internal DNS zone named corp7523690.com. The zone must NOT be hosted on a virtual machine.

What should you do from Azure Cloud Shell?

To complete this task, start Azure Cloud Shell and select PowerShell(Linux). Click Show Advanced Settings, and then enter corp7523690n1 in the Storage account text box and File1 in the File share text box. Click Create storage, and then complete the task.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: New-AzureRMResourceGroup -name MyResourceGroup


Before you create the DNS zone, create a resource group to contain the DNS zone.


Step 2: New-AzureRmDnsZone -Name corp7523690.com -ResourceGroupName MyResourceGroup A DNS zone is created by using the New-AzureRmDnsZone cmdlet. This creates a DNS zone called corp7523690.com in the resource group called MyResourceGroup.

References: <https://docs.microsoft.com/en-us/azure/dns/dns-getstarted-powershell>

NEW QUESTION 106

Click to expand each objective. To connect to the Azure portal, type <https://portal.azure.com> in the browser address bar.

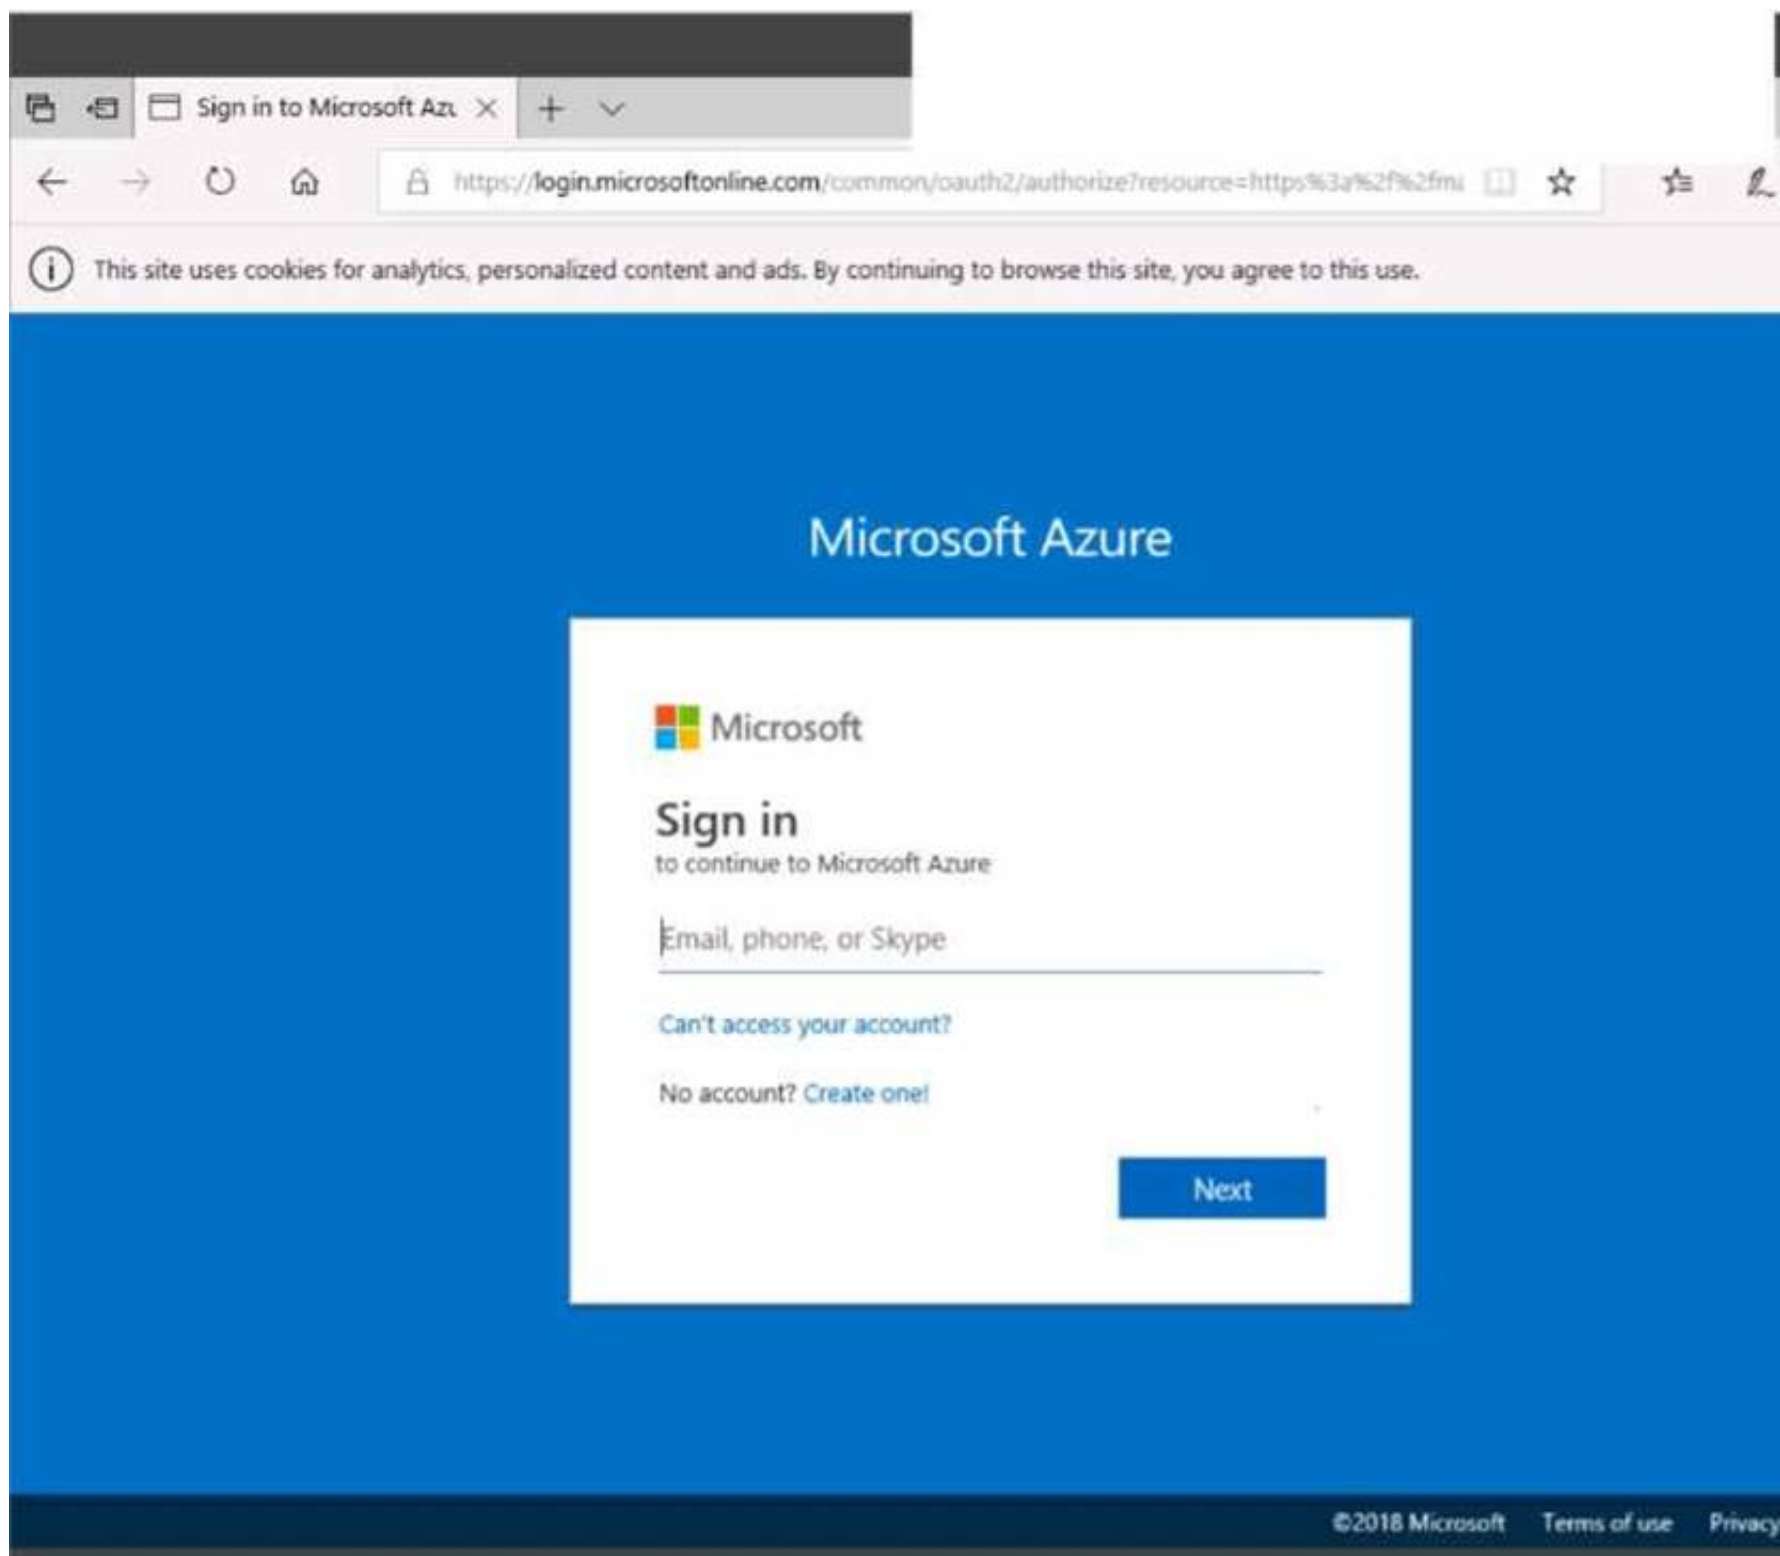

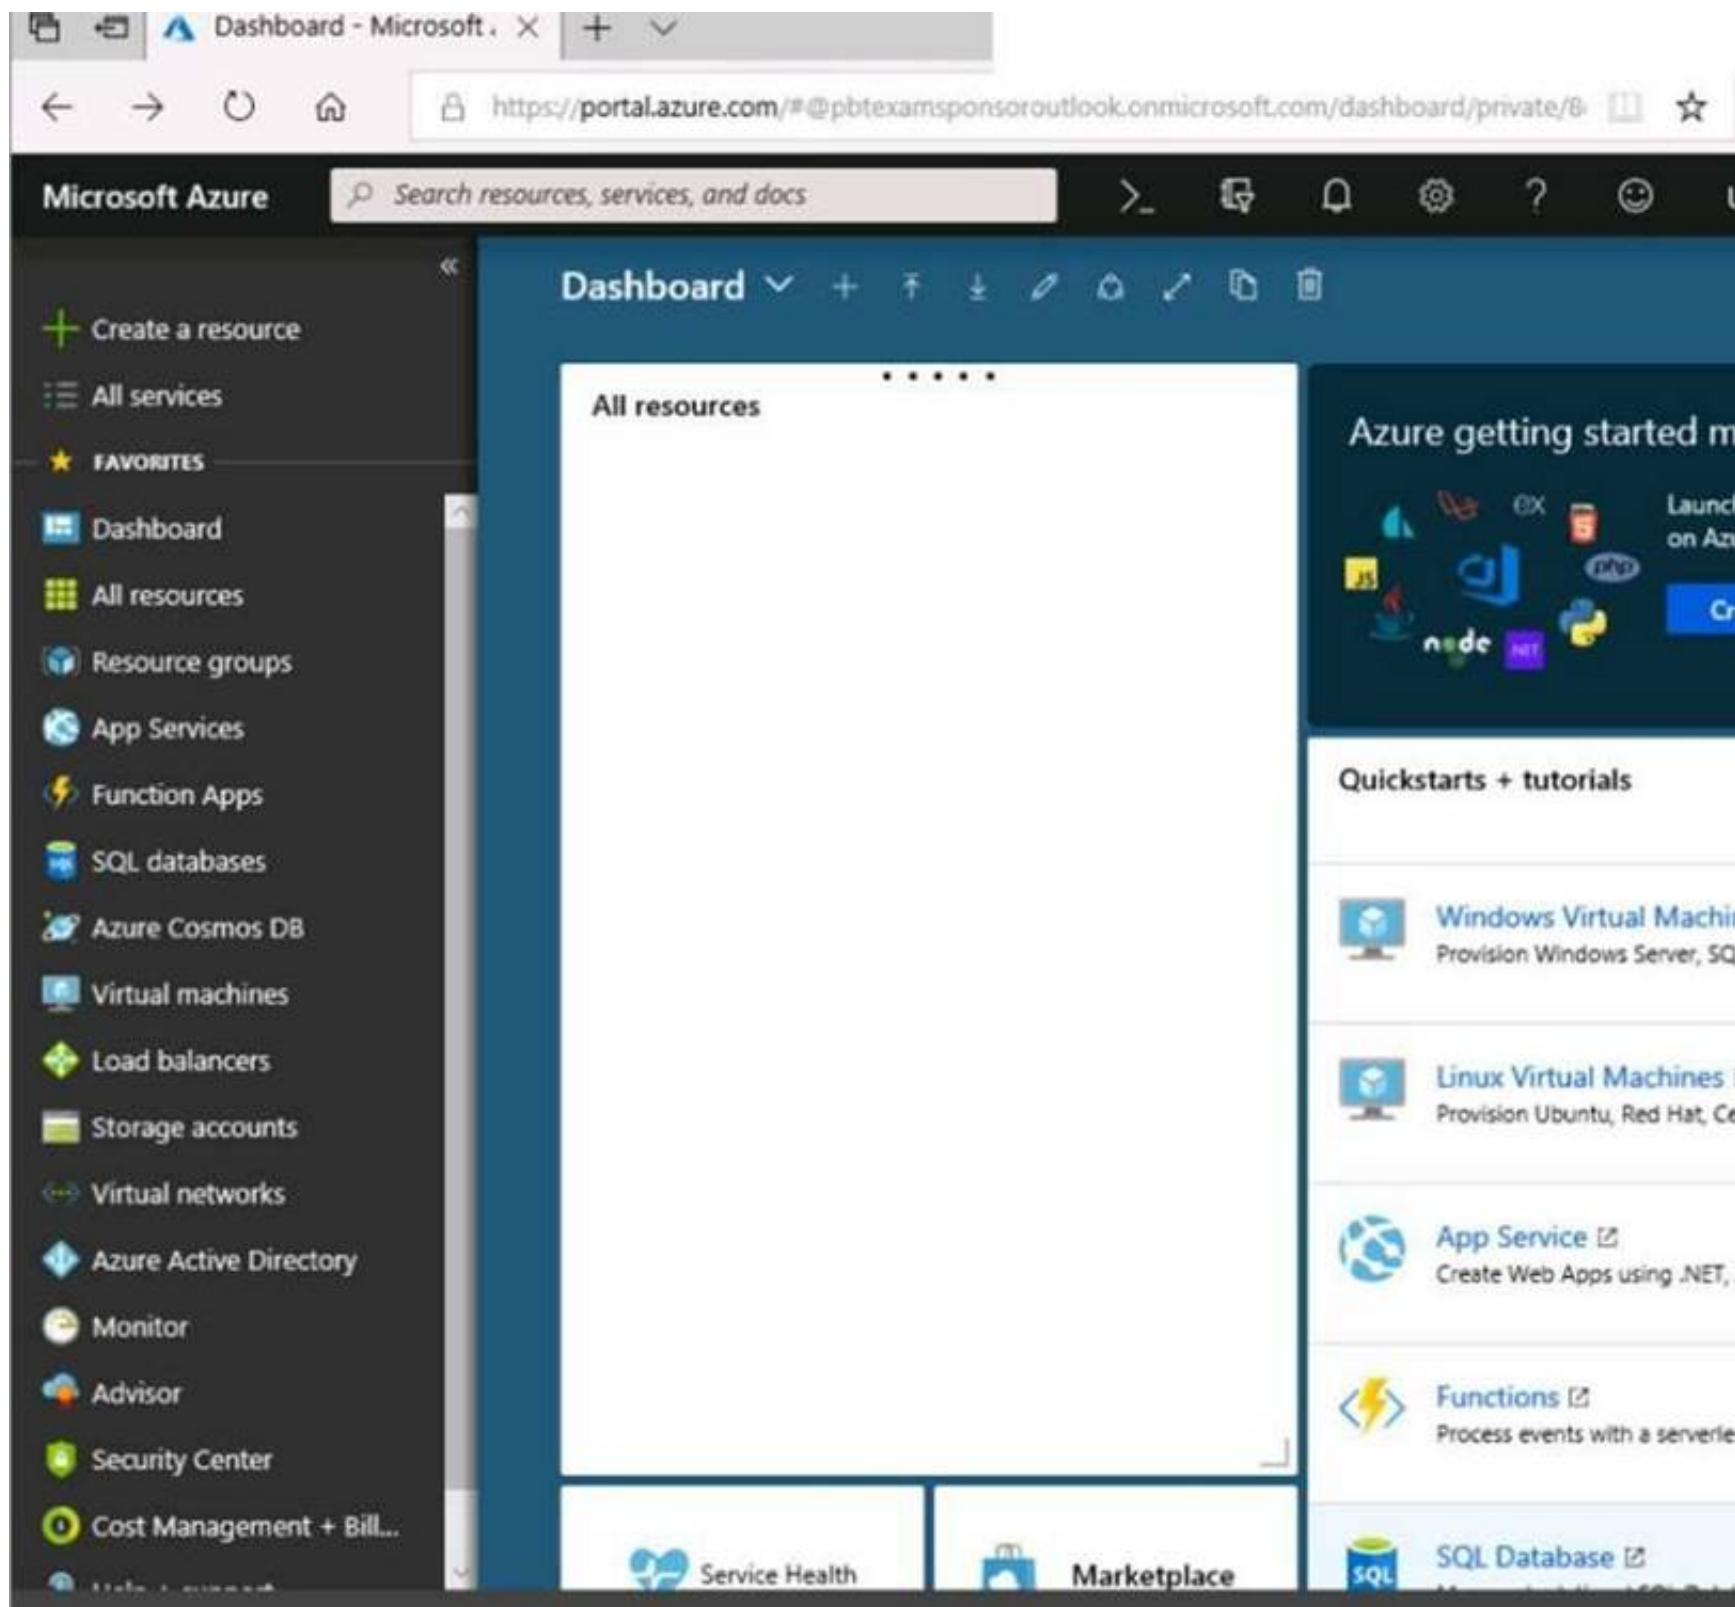

Create storage account

✓

Validation passed

BasicsAdvancedTagsReview + create

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Create

Previous

Next

Download a template for automation

Home > Storage accounts > Create storage account

Create storage account

[Basics](#)
[Advanced](#)
[Tags](#)
[Review + create](#)

BASICS

Subscription	Microsoft AZ-100 5
Resource group	corpdatalod7523690
Location	East US
Storage account name	corpdata7523690n1
Deployment model	Resource manager
Account kind	StorageV2 (general purpose v2)
Replication	Read-access geo-redundant storage (RA-GRS)
Performance	Standard
Access tier (default)	Hot

ADVANCED

Secure transfer required	Enabled
Hierarchical namespace	Disabled

Submitting deployment...

Submitting the deployment template for resource 'corpdatalod7523690'.

Home > Microsoft.StorageAccount-20181011170335 - Overview

Microsoft.StorageAccount-20181011170335 - Overview

Deployment

«
Delete
Cancel
Redeploy
Refresh

Overview


Outputs

Inputs

Template

Your deployment is underway

Check the status of your deployment, manage resources, or troubleshoot deployment issues. Pin this page to your dashboard to easily find it next time.



Deployment

name: Microsoft.StorageAccount-20181011170335

Subscription: [Microsoft AZ-100 5](#)

Resource group: [corpdatalod7523690](#)

DEPLOYMENT DETAILS [\(Download\)](#)

Start time: 10/11/2018 5:04:06 PM


Duration: 17 seconds

Correlation ID: bd0806a4-d1bd-42db-be6b-55e0ec38f49b

RESOURCE	TYPE	STATUS	OPERATI...
No results.			

[Home](#) > [Virtual machines](#) > Create a virtual machine

Create a virtual machine

 Validation failed. Required information is missing or not valid.

[Basics](#) • [Disks](#) [Networking](#) [Management](#) [Guest config](#) [Tags](#) [Review + create](#)

PRODUCT DETAILS

Ubuntu Server 18.04 LTS

by Canonical

[Terms of use](#) | [Privacy policy](#)

Standard D2s v3

by Microsoft

[Terms of use](#) | [Privacy policy](#)

Pricing not available for this offering

View [Pricing details](#) for more information.

Subscription credits apply 

0.0960 USD/hr

[Pricing for other VM sizes](#)

TERMS

By clicking "Create", I (a) agree to the legal terms and privacy statement(s) associated with the Marketplace offering(s) listed above; (b) authorize Microsoft to bill my current payment method for the fees associated with the offering(s), with the same billing frequency as my Azure subscription; and (c) agree that Microsoft may share my contact, usage and transactional information with the provider(s) of the offering(s) for support, billing and other transactional activities. Microsoft does not provide rights for third-party offerings. See the [Azure Marketplace Terms](#) for additional details.

When you are finished performing all the tasks, click the 'Next' button.

Note that you cannot return to the lab once you click the 'Next' button. Scoring occur in the background while you complete the rest of the exam.

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design. Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You need to create a virtual network named VNET1008 that contains three subnets named subnet0, subnet1, and subnet2. The solution must meet the following requirements:

- ? Connections from any of the subnets to the Internet must be blocked.
- ? Connections from the Internet to any of the subnets must be blocked.
- ? The number of network security groups (NSGs) and NSG rules must be minimized.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Click Create a resource in the portal.

Step 2: Enter Virtual network in the Search the Marketplace box at the top of the New pane that appears. Click Virtual network when it appears in the search results.

Step 3: Select Classic in the Select a deployment model box in the Virtual Network pane that appears, then click Create.

Step 4: Enter the following values on the Create virtual network (classic) pane and then click Create: Name: VNET1008

Address space: 10.0.0.0/16 Subnet name: subnet0 Resource group: Create new

Subnet address range: 10.0.0.0/24

Subscription and location: Select your subscription and location.

Step 5: In the portal, you can create only one subnet when you create a virtual network. Click Subnets (in the SETTINGS section) on the Create virtual network (classic) pane that appears.

Click +Add on the VNET1008 - Subnets pane that appears.

Step 6: Enter subnet1 for Name on the Add subnet pane. Enter 10.0.1.0/24 for Address range. Click OK.

Step 7: Create the third subnet: Click +Add on the VNET1008 - Subnets pane that appears. Enter subnet2 for Name on the Add subnet pane. Enter 10.0.2.0/24 for Address range. Click OK. References: <https://docs.microsoft.com/en-us/azure/virtual-network/create-virtual-network-classic>

NEW QUESTION 108

You have an Azure tenant that contains two subscriptions named Subscription1 and Subscription2. In Subscription1, you deploy a virtual machine named Server1 that runs Windows Server 2016. Server1 uses managed disks. You need to move Server1 to Subscription2. The solution must minimize administration effort. What should you do first?

- A. In Subscription2, create a copy of the virtual disk.
- B. From Azure PowerShell, run the Move-AzureRmResource cmdlet.
- C. Create a snapshot of the virtual disk.
- D. Create a new virtual machine in Subscription2.

Answer: B

Explanation:

To move existing resources to another resource group or subscription, use the Move-AzureRmResource cmdlet. References: <https://docs.microsoft.com/en-in/azure/azure-resource-manager/resource-group-move-resources#moveresources>

NEW QUESTION 113

You have an Azure subscription that contains a resource group named RG1. RG1 contains 100 virtual machines. Your company has three cost centers named Manufacturing, Sales, and Finance. You need to associate each virtual machine to a specific cost center. What should you do?

- A. Add an extension to the virtual machines.
- B. Modify the inventory settings of the virtual machine.
- C. Assign tags to the virtual machines.
- D. Configure locks for the virtual machine.

Answer: C

Explanation:

References: <https://docs.microsoft.com/en-us/azure/billing/billing-getting-started> <https://docs.microsoft.com/en-us/azure/azure-resource-manager/resource-group-using-tags>

NEW QUESTION 118

You have an Azure policy as shown in the following exhibit.

SCOPE

* Scope ([Learn more about setting the scope](#))

Subscription 1

Exclusions

Subscription 1/ContosoRG1

BASICS

* Policy definition

Not allowed resource types

* Assignment name ⓘ

Not allowed resource types

Assignment ID

/subscriptions/3eb8d0b6-ce3b-4ce0-a631-9f5321bedabb/providers/Microsoft.Authorization/policyAssignments/0e6fb866b854f54accae2a9

Description

Assigned by:

admin1@contoso.com

PARAMETERS

* Not allowed resource types ⓘ

Microsoft.Sql/servers

Which of the following statements are true?
Which of the following statements are true?

- A. You can create Azure SQL servers in ContosoRG1.
- B. You are prevented from creating Azure SQL servers anywhere in Subscription 1.
- C. You are prevented from creating Azure SQL Servers in ContosoRG1 only.
- D. You can create Azure SQL servers in any resource group within Subscription 1.

Answer: A

Explanation:

You are prevented from creating Azure SQL servers anywhere in Subscription 1 with the exception of ContosoRG1

NEW QUESTION 121

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design.

Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task.

Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to prevent users from accidentally deleting blob data from Azure.

You need to ensure that administrators can recover any blob data that is deleted accidentally from the storagelod8095859 storage account for 14 days after the deletion occurred.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:


Answer:

See explanation below.

Task A: Create a Recovery Services vault (if a vault already exists skip this task, go to Task B below) A1. From Azure Portal, On the Hub menu, click All services and in the list of resources, type Recovery Services and click Recovery Services vaults.




If there are recovery services vaults in the subscription, the vaults are listed. A2. On the Recovery Services vaults menu, click Add.

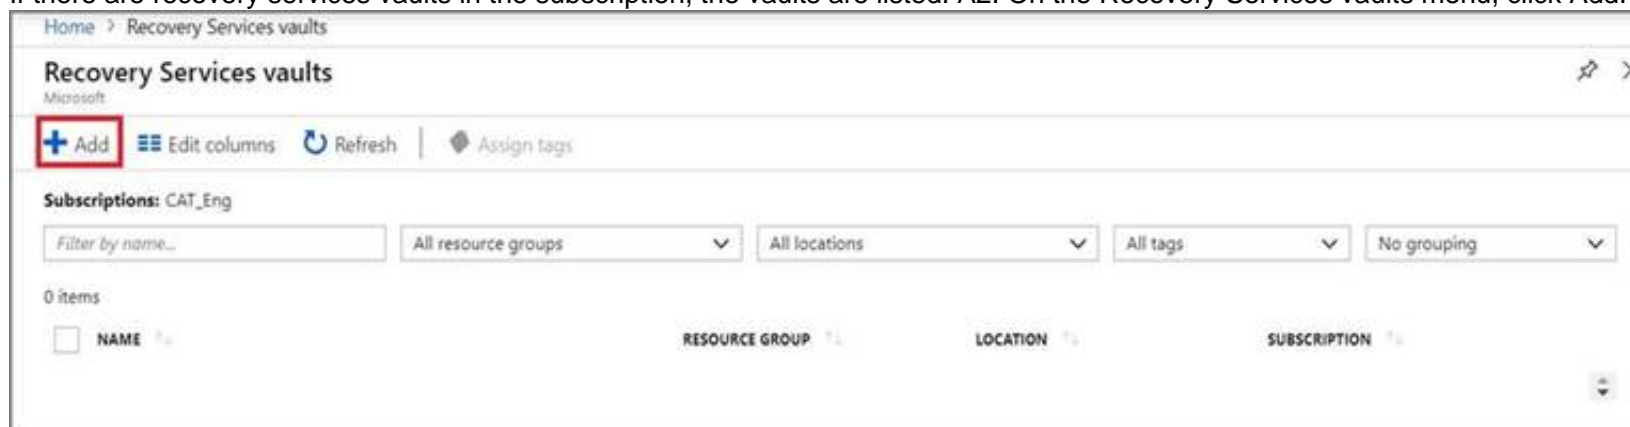

A3. The Recovery Services vault blade opens, prompting you to provide a Name, Subscription, Resource group, and Location


Task B. Create a backup goal

B1. On the Recovery Services vault blade (for the vault you just created), in the Getting Started section, click Backup, then on the Getting Started with Backup blade, select Backup goal.

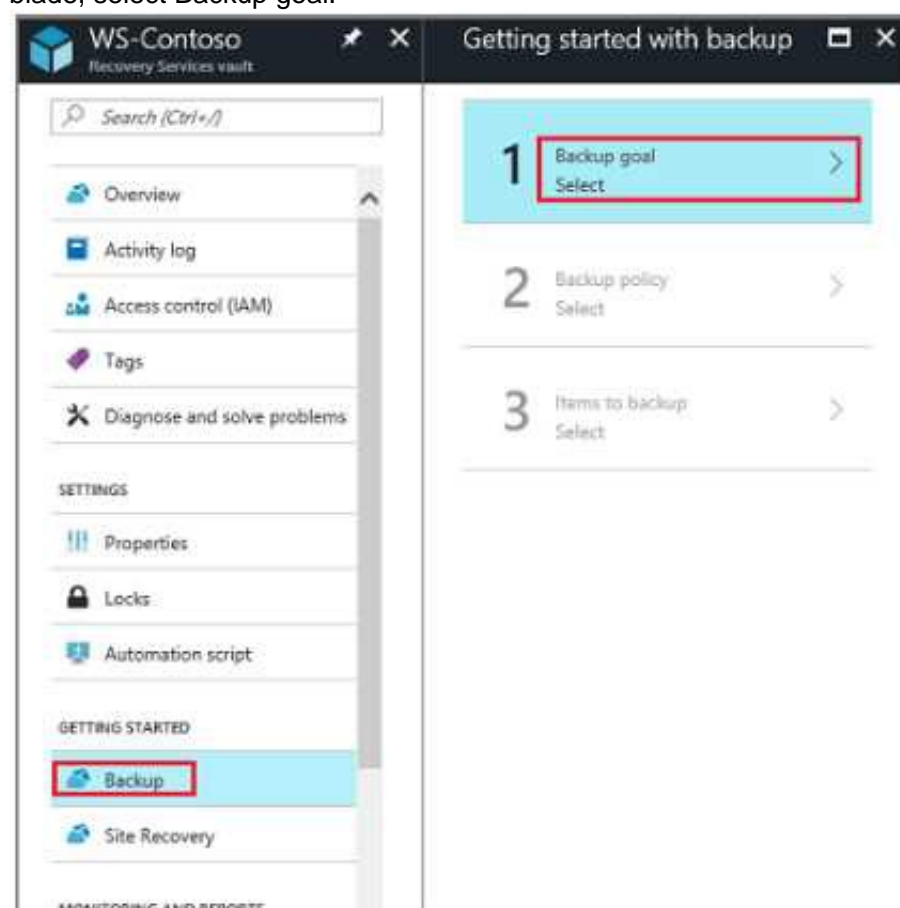

The Backup Goal blade opens. If the Recovery Services vault has been previously configured, then

the Backup Goal blades opens when you click Backup on the Recovery Services vault blade. B2. From the Where is your workload running? drop-down menu, select Azure.

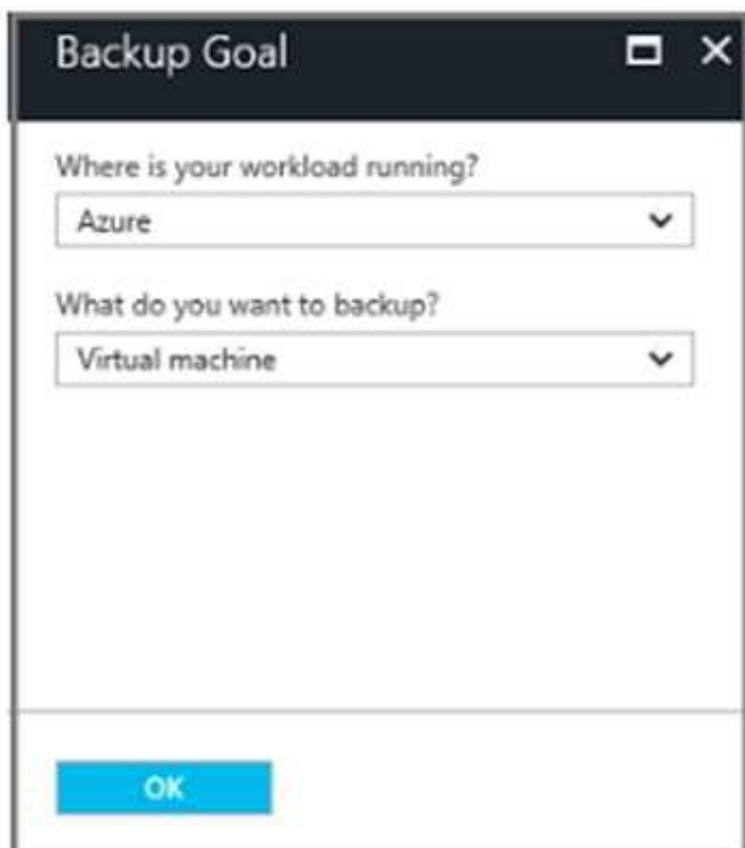


B3. From the What do you want to backup? menu, select Blob Storage, and click OK.

B4. Finish the Wizard.

Task C. create a backup schedule

C1. Open the Microsoft Azure Backup agent. You can find it by searching your machine for Microsoft Azure Backup.

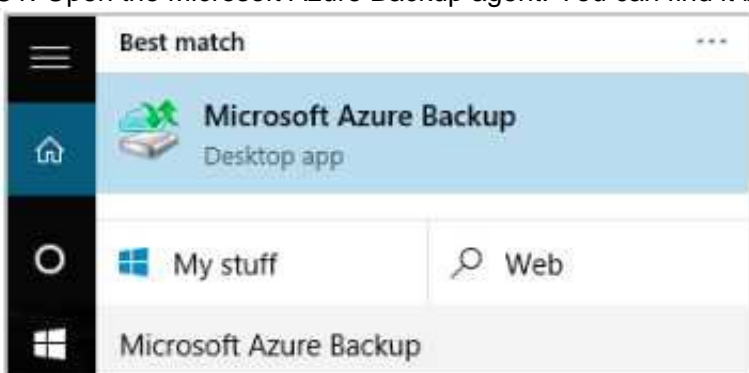

C2. In the Backup agent's Actions pane, click Schedule Backup to launch the Schedule Backup Wizard.




C3. On the Getting started page of the Schedule Backup Wizard, click Next.


C4. On the Select Items to Backup page, click Add Items. The Select Items dialog opens.

C5. Select Blob Storage you want to protect, and then click OK. C6. In the Select Items to Backup page, click Next.

On the Specify Backup Schedule page, specify Schedule a backup every day, and click Next.

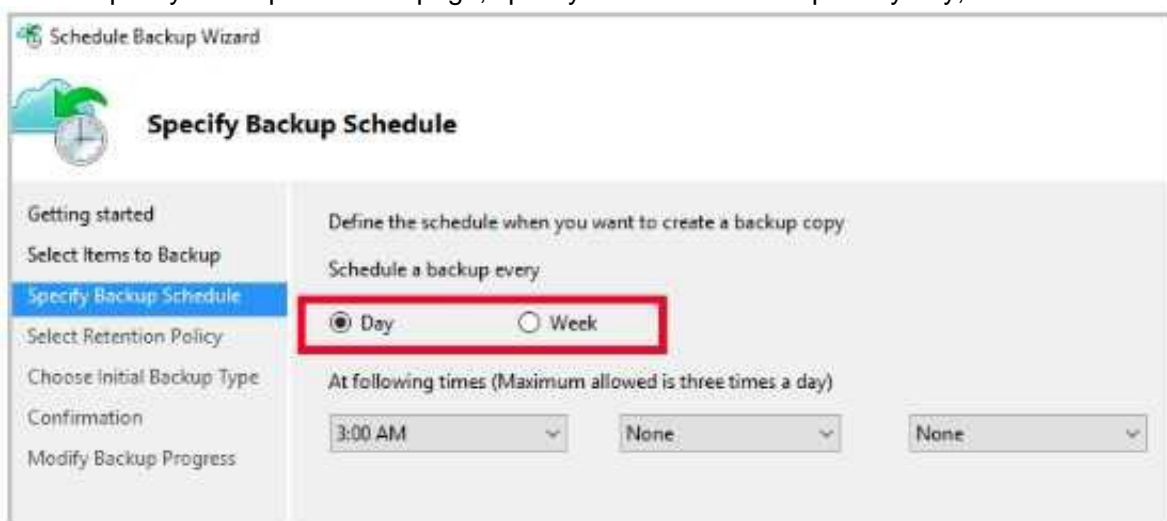

C7. On the Select Retention Policy page, set it to 14 days, and click Next.

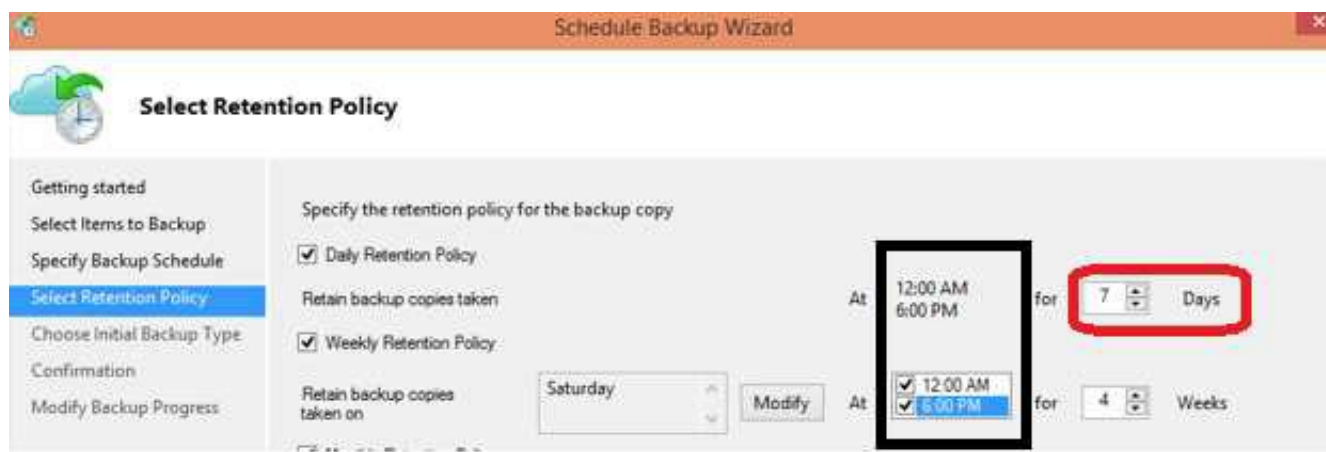


C8. Finish the Wizard. References:

<https://docs.microsoft.com/en-us/azure/backup/backup-configure-vault>

NEW QUESTION 125

You have an Azure subscription.

You have an on-premises virtual machine named VM1. The settings for VM1 are shown in the exhibit. (Click the Exhibit button.)

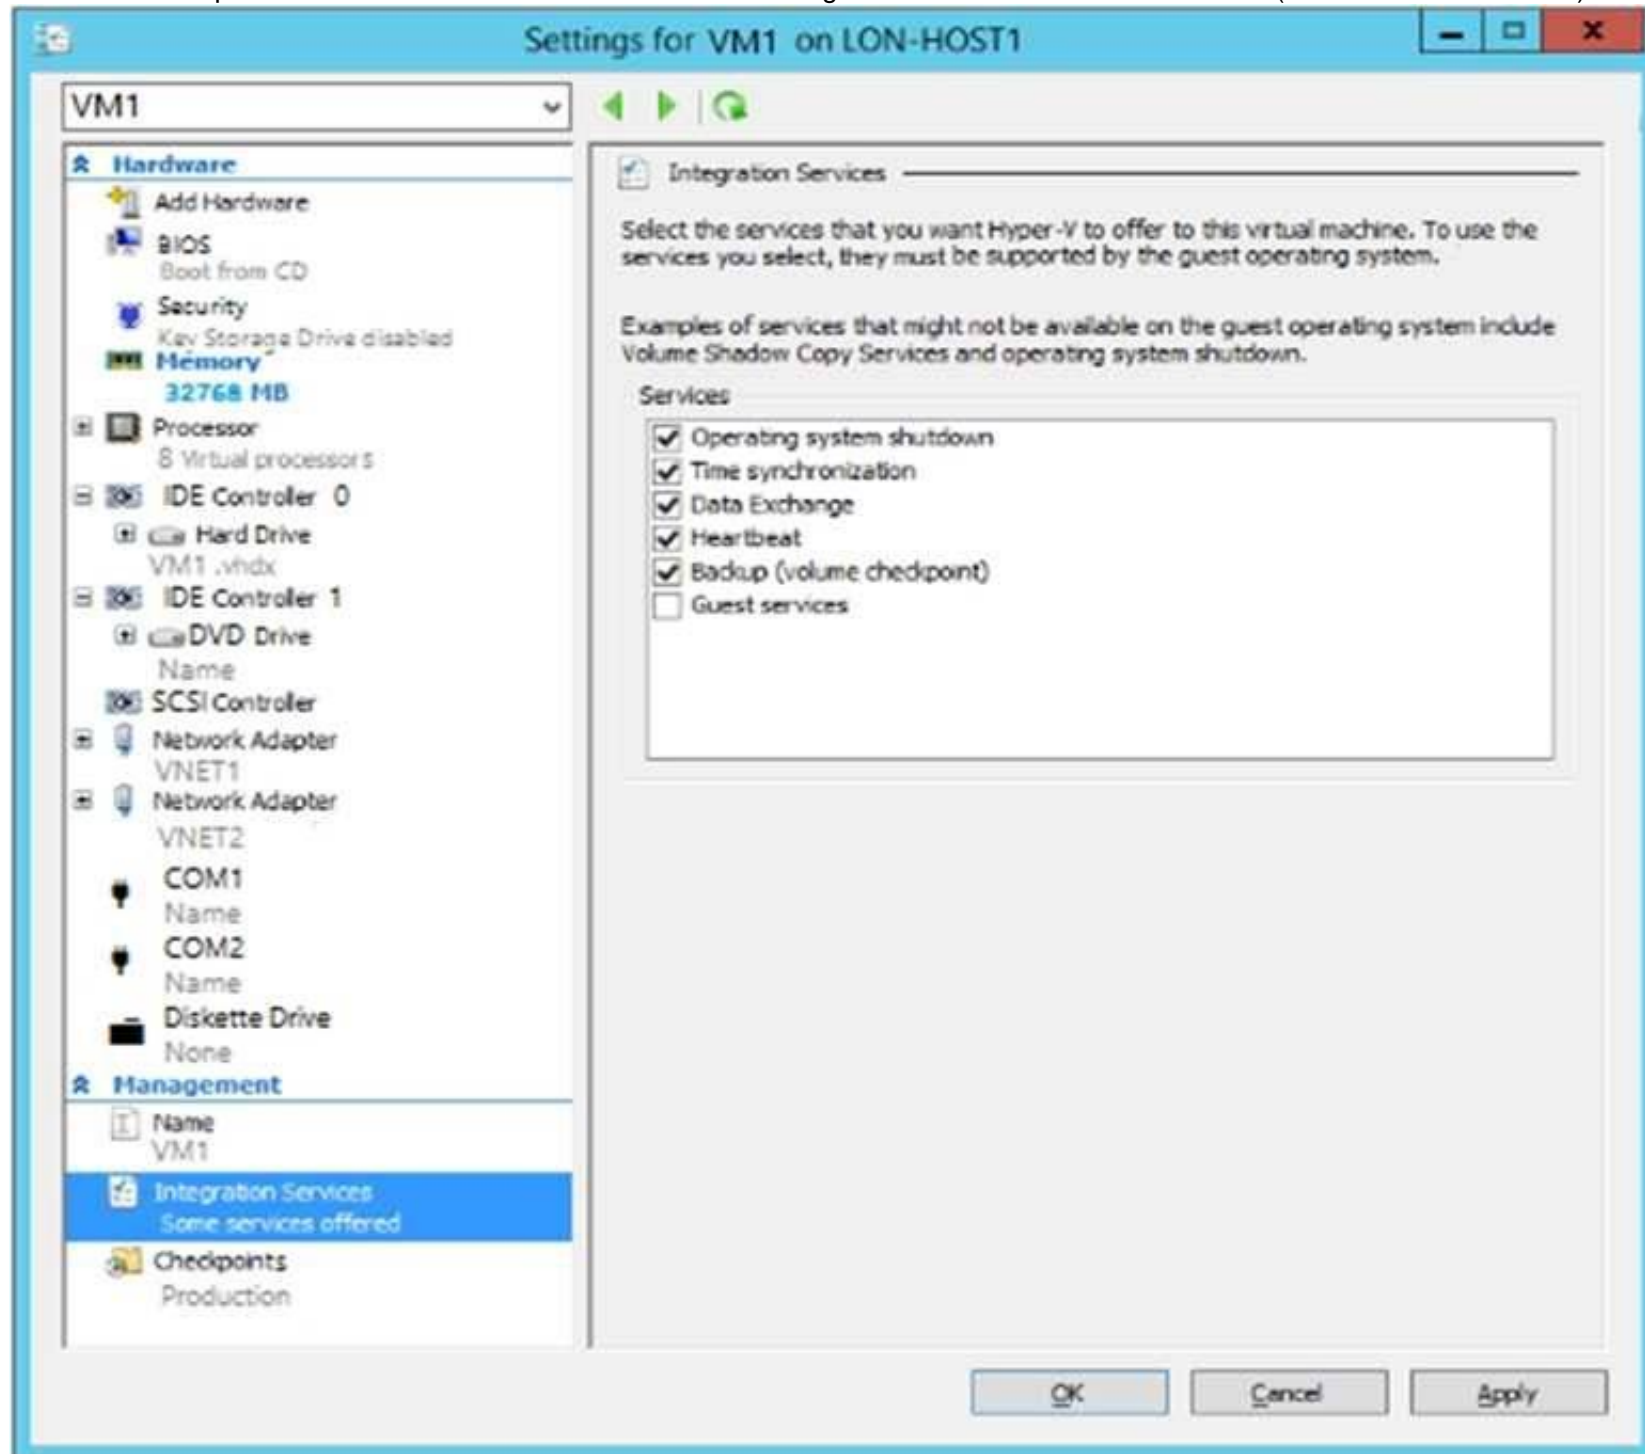

You need to ensure that you can use the disks attached to VM1 as a template for Azure virtual machines. What should you modify on VM1?

- A. Integration Services
- B. the network adapters
- C. the memory
- D. the hard drive
- E. the processor

Answer: D

Explanation:

From the exhibit we see that the disk is in the VHDX format.

Before you upload a Windows virtual machines (VM) from on-premises to Microsoft Azure, you must prepare the virtual hard disk (VHD or VHDX). Azure supports only generation 1 VMs that are in the VHD file format and have a fixed sized disk. The maximum size allowed for the VHD is 1,023 GB. You can convert a generation 1 VM from the VHDX file system to VHD and from a dynamically expanding disk to fixed-sized. References:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/prepare-for-upload-vhd-image?toc=%2fazure%2fvirtual-machines%2fwindows%2ftoc.json>

NEW QUESTION 128

HOTSPOT

You create a virtual machine scale set named Scale1. Scale1 is configured as shown in the following exhibit.

INSTANCES

* Instance count ⓘ	<input type="text" value="4"/>	✓
* Instance size (View full pricing details) ⓘ	DS1_v2 (1 vCPU, 3.5 GB)	✓
Deploy as low priority ⓘ	<input checked="" type="button" value="No"/> <input type="button" value="Yes"/>	
Use managed disks ⓘ	<input type="button" value="No"/> <input checked="" type="button" value="Yes"/>	
+ Show advanced settings		

AUTOSCALE

Autoscale ⓘ	<input type="button" value="Disabled"/> <input checked="" type="button" value="Enabled"/>	
* Minimum number of VMs ⓘ	<input type="text" value="2"/>	✓
* Maximum number of VMs ⓘ	<input type="text" value="20"/>	✓
Scale out		
* CPU threshold (%) ⓘ	<input type="text" value="80"/>	✓
* Number of VMs to increase by ⓘ	<input type="text" value="2"/>	✓
Scale in		
* CPU threshold (%) ⓘ	<input type="text" value="30"/>	✓
* Number of VMs to decrease by ⓘ	<input type="text" value="4"/>	✓

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

If Scale1 is utilized at 85 percent for six minutes, Scale1 will be running [answer choice].

▼
2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

If Scale1 is first utilized at 25 percent for six minutes, and then utilized at 50 percent for six minutes, Scale1 will be running [answer choice].

▼
2 virtual machines
4 virtual machines
6 virtual machines
10 virtual machines
20 virtual machines

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Box 1:

The Autoscale scale out rule increases the number of VMs by 2 if the CPU threshold is 80% or higher. The initial instance count is 4 and rises to 6 when the 2 extra instances of VMs are added.

Box 2:

The Autoscale scale in rule decreases the number of VMs by 4 if the CPU threshold is 30% or lower. The initial instance count is 4 and thus cannot be reduced to 0 as the minimum instances is set to 2. Instances are only added when the CPU threshold reaches 80%.

References:

<https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-overview> <https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-best-practices> <https://docs.microsoft.com/en-us/azure/azure-monitor/platform/autoscale-common-scale-patterns>

NEW QUESTION 131

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design.

Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task. Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You recently created a virtual machine named Web01.

You need to attach a new 80-GB standard data disk named Web01-Disk1 to Web01.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered


Answer: A

Explanation:

Add a data disk

Step 1. In the Azure portal, from the menu on the left, select Virtual machines. Step 2. Select the Web01 virtual machine from the list.

Step 3. On the Virtual machine page, , in Essentials, select Disks.

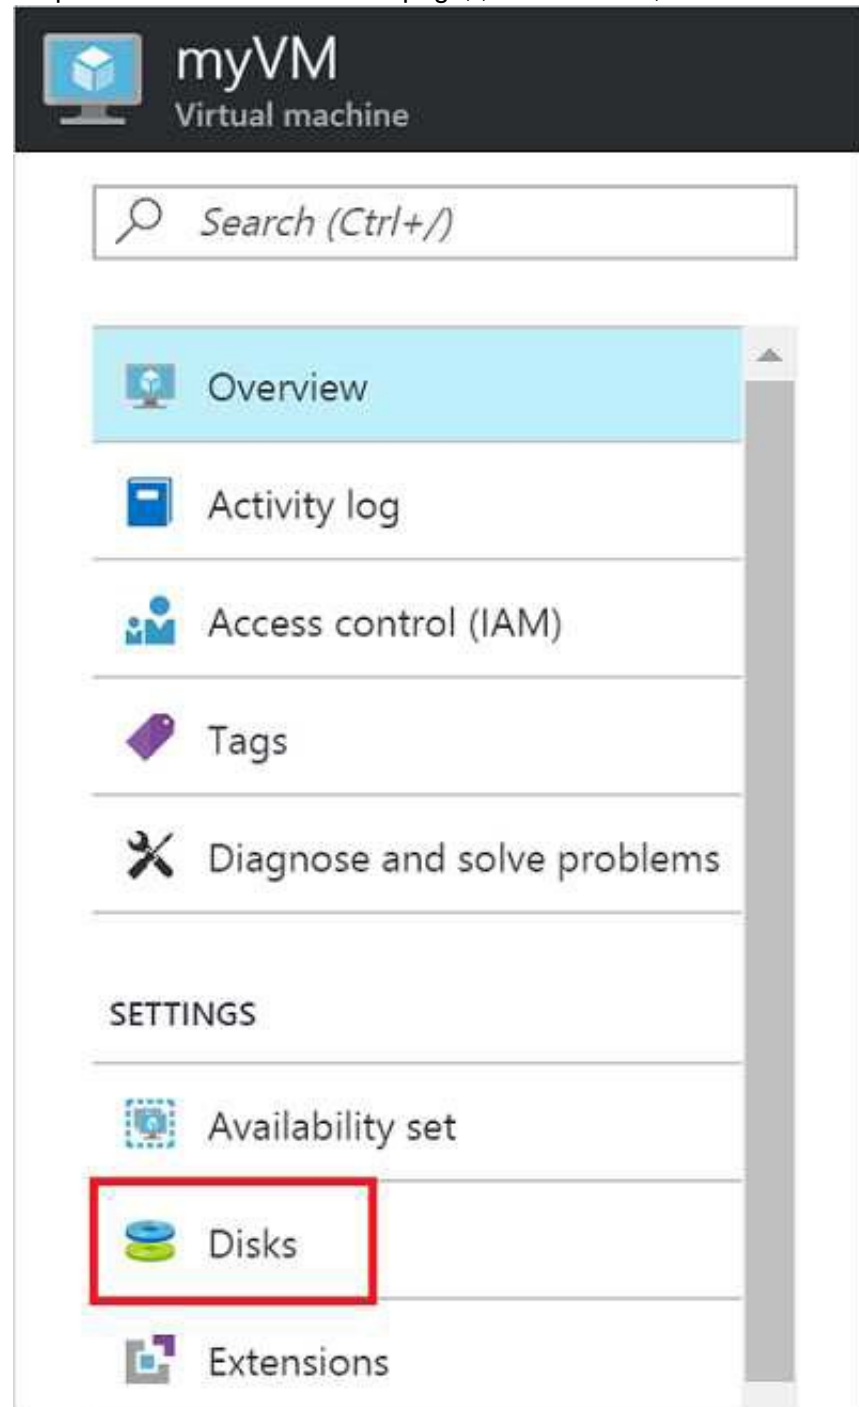

Step 4. On the Disks page, select the Web01-Disk1 from the list of existing disks.

Step 5. In the Disks pane, click + Add data disk.

Step 6. Click the drop-down menu for Name to view a list of existing managed disks accessible to your Azure subscription. Select the managed disk Web01-Disk1 to attach:

Save

Discard

OS disk

NAME	SIZE	ACCOUNT TYPE
myVM		Premium_LRS

Data disks

LUN	NAME	SIZE	ACCOUNT TYPE
0	myDataDisk	1023 GiB	Premium_LRS

1

Create disk

Disks in resource group 'myResourceGroup'
myExistingDisk
size: 1023 GiB, account type: Premium_LRS

All disks
myExistingDisk
size: 1023 GiB, account type: Premium_LRS, resource group: MYRESOURCEGROUP

References:

<https://docs.microsoft.com/en-us/azure/virtual-machines/linux/attach-disk-portal>

NEW QUESTION 133

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design.

Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task. Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to allow connections between the VNET01-USEA2 and VNET01-USWE2 virtual networks. You need to ensure that virtual machines can communicate across both virtual networks by using their private IP address. The solution must NOT require any virtual network gateways.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered


Answer: A

Explanation:

Virtual network peering enables you to seamlessly connect two Azure virtual networks. Once peered, the virtual networks appear as one, for connectivity purposes. Peer virtual networks

Step 1. In the Search box at the top of the Azure portal, begin typing VNET01-USEA2. When VNET01-USEA2 appears in the search results, select it.

Step 2. Select Peerings, under SETTINGS, and then select + Add, as shown in the following picture:

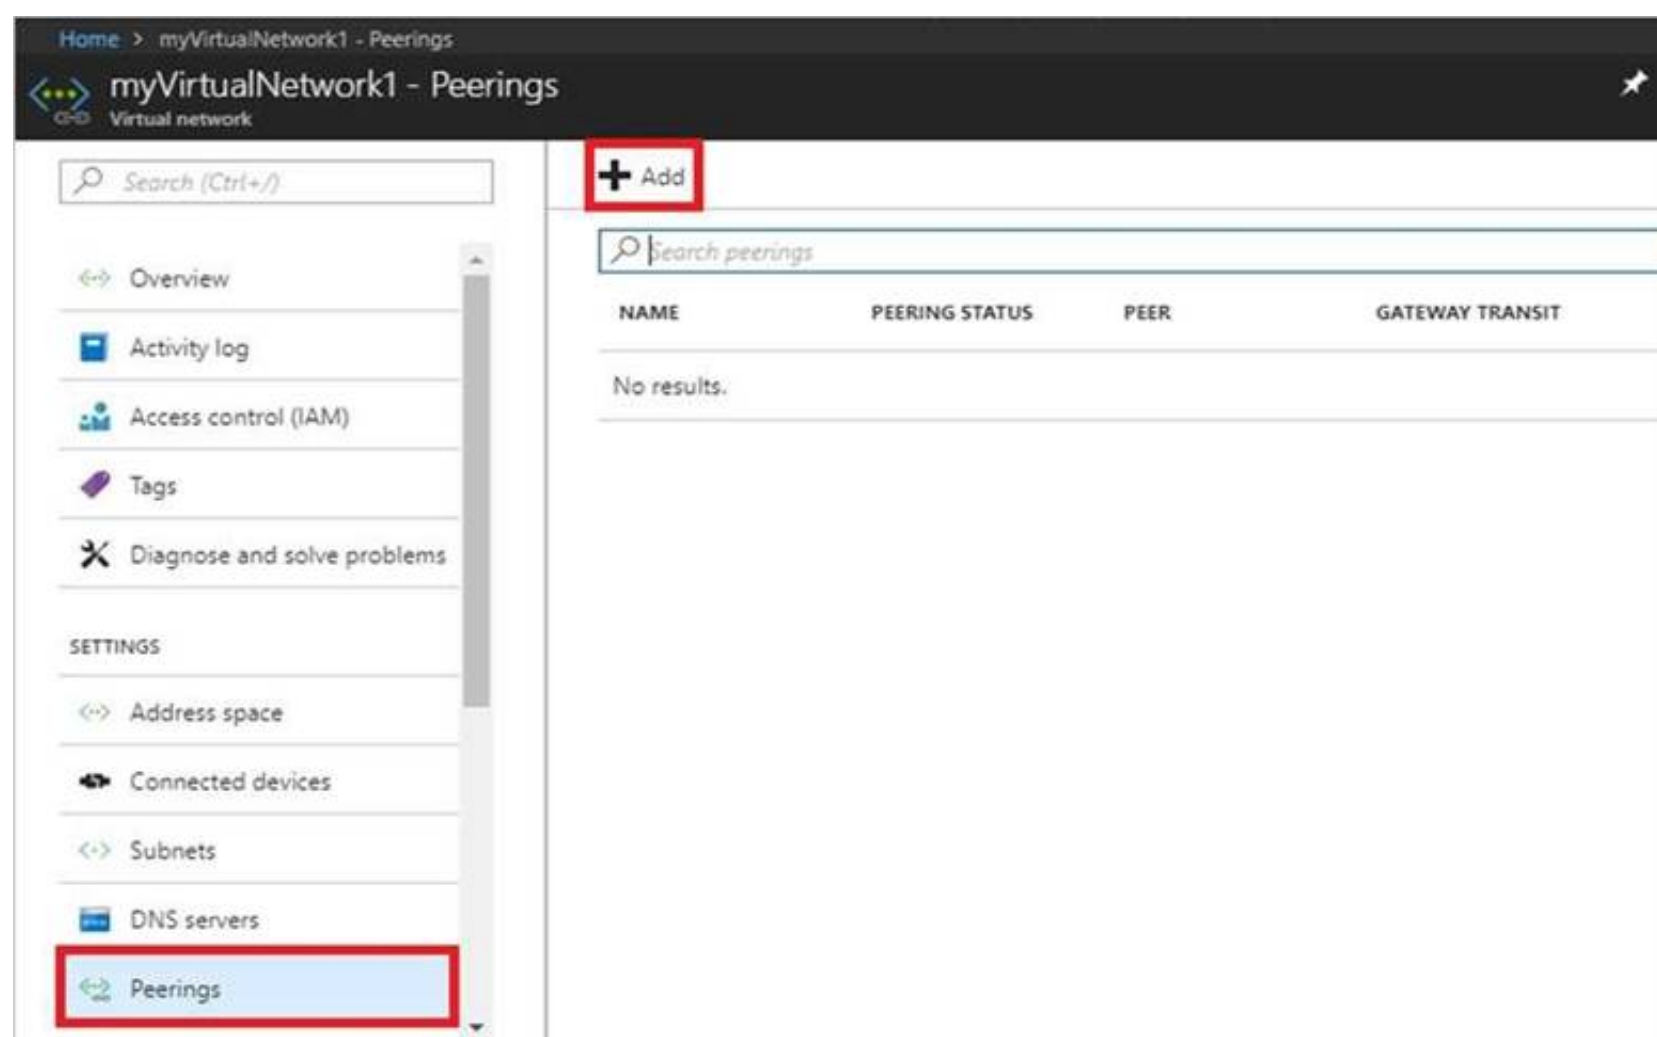

Step 3. Enter, or select, the following information, accept the defaults for the remaining settings, and then select OK.

Name: myVirtualNetwork1-myVirtualNetwork2 (for example) Subscription: elect your subscription.

Virtual network: VNET01-USWE2 - To select the VNET01-USWE2 virtual network, select Virtual network, then select VNET01-USWE2. You can select a virtual network in the same region or in a different region.

Now we need to repeat steps 1-3 for the other network VNET01-USWE2:

Step 4. In the Search box at the top of the Azure portal, begin typing VNET01- USEA2. When VNET01- USEA2 appears in the search results, select it.

Step 5. Select Peerings, under SETTINGS, and then select + Add. References:

<https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-connect-virtual-networks-portal>

NEW QUESTION 137

Overview

The following section of the exam is a lab. In this section, you will perform a set of tasks in a live environment. While most functionality will be available to you as it would be in a live environment, some functionality (e.g., copy and paste, ability to navigate to external websites) will not be possible by design.

Scoring is based on the outcome of performing the tasks stated in the lab. In other words, it doesn't matter how you accomplish the task, if you successfully perform it, you will earn credit for that task. Labs are not timed separately, and this exam may have more than one lab that you must complete. You can use as much time as you would like to complete each lab. But, you should manage your time appropriately to ensure that you are able to complete the lab(s) and all other sections of the exam in the time provided.

Please note that once you submit your work by clicking the Next button within a lab, you will NOT be able to return to the lab.

To start the lab

You may start the lab by clicking the Next button.

You plan to host several secured websites on Web01.

You need to allow HTTPS over TCP port 443 to Web01 and to prevent HTTP over TCP port 80 to Web01.

What should you do from the Azure portal?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer:

See explanation below.

You can filter network traffic to and from Azure resources in an Azure virtual network with a network security group. A network security group contains security rules that allow or deny inbound network traffic to, or outbound network traffic from, several types of Azure resources.

A network security group contains security rules that allow or deny inbound network traffic to, or outbound network traffic from, several types of Azure resources.

Step A: Create a network security group

A1. Search for and select the resource group for the VM, choose Add, then search for and select Network security group.

A2. Select Create.

The Create network security group window opens. A3. Create a network security group

Enter a name for your network security group.

Select or create a resource group, then select a location. A4. Select Create to create the network security group.

Step B: Create an inbound security rule to allows HTTPS over TCP port 443 B1. Select your new network security group.

B2. Select Inbound security rules, then select Add. B3. Add inbound rule

B4. Select Advanced.

From the drop-down menu, select HTTPS.

You can also verify by clicking Custom and selecting TCP port, and 443. B5. Select Add to create the rule.

Repeat step B2-B5 to deny TCP port 80

B6. Select Inbound security rules, then select Add. B7. Add inbound rule

B8. Select Advanced.


Clicking Custom and selecting TCP port, and 80. B9. Select Deny.

Step C: Associate your network security group with a subnet

Your final step is to associate your network security group with a subnet or a specific network interface.

C1. In the Search resources, services, and docs box at the top of the portal, begin typing Web01. When the Web01 VM appears in the search results, select it.

C2. Under SETTINGS, select Networking. Select Configure the application security groups, select the Security Group you created in Step A, and then select Save, as shown in the following picture:

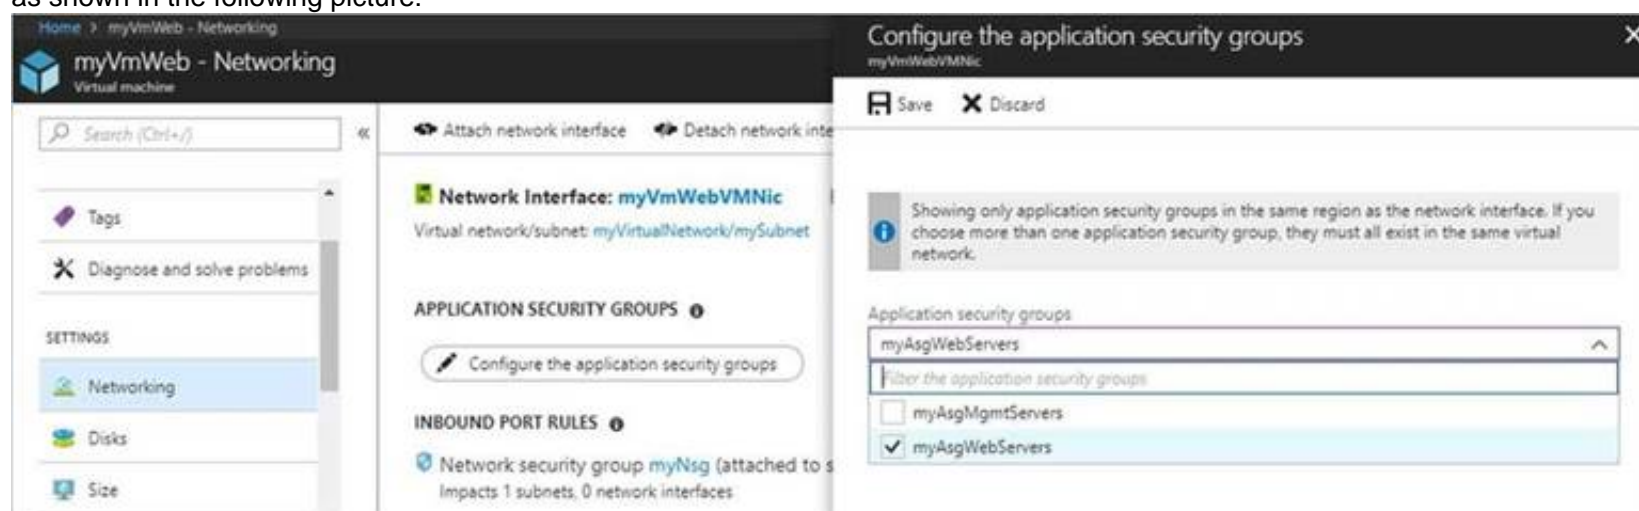

References:

<https://docs.microsoft.com/en-us/azure/virtual-network/tutorial-filter-network-traffic>

NEW QUESTION 142

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com.

You hire a temporary vendor. The vendor uses a Microsoft account that has a sign-in of user1@outlook.com.

You need to ensure that the vendor can authenticate to the tenant by using user1@outlook.com. What should you do?

- A. From Windows PowerShell, run the New-AzureADUser cmdlet and specify the –UserPrincipalName user1@outlook.com parameter.
- B. From the Azure portal, add a custom domain name, create a new Azure AD user, and then specify user1@outlook.com as the username.
- C. From Azure Cloud Shell, run the New-AzureADUser cmdlet and specify the –UserPrincipalName user1@outlook.com parameter.
- D. From the Azure portal, add a new guest user, and then specify user1@outlook.com as the email address.

Answer: A

Explanation:

UserPrincipalName - contains the UserPrincipalName (UPN) of this user. The UPN is what the user will use when they sign in into Azure AD. The common structure is @, so for Abby Brown in Contoso.com, the UPN would be AbbyB@contoso.com
Example:

To create the user, call the New-AzureADUser cmdlet with the parameter values:

powershell New-AzureADUser -AccountEnabled \$True -DisplayName "Abby Brown" -PasswordProfile \$PasswordProfile -MailNickName "AbbyB" -UserPrincipalName "AbbyB@contoso.com" References:
<https://docs.microsoft.com/bs-cyrl-ba/powershell/azure/active-directory/new-user-sample?view=azureadps-2.0>

NEW QUESTION 145

DRAG DROP

You have an Azure subscription that contains an Azure file share.

You have an on-premises server named Server1 that runs Windows Server 2016. You plan to set up Azure File Sync between Server1 and the Azure file share.

You need to prepare the subscription for the planned Azure File Sync.

Which two actions should you perform in the Azure subscription? To answer, drag the appropriate actions to the correct targets. Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

Actions		Answer Area
Create a Storage Sync Service		First action: <div>Action</div>
Create a sync group	➔	Second action: <div>Action</div>
Install the Azure File Sync agent	⬅	
Run Server Registration		

- A. Mastered
- B. Not Mastered

Answer: A


Explanation:

First action: Create a Storage Sync Service

The deployment of Azure File Sync starts with placing a Storage Sync Service resource into a resource group of your selected subscription.

Second action: Run Server Registration

Registering your Windows Server with a Storage Sync Service establishes a trust relationship between your server (or cluster) and the Storage Sync Service. A server can only be registered to one Storage Sync Service and can sync with other servers and Azure file shares associated with the same Storage Sync Service. The Server Registration UI should open automatically after installation of the Azure File Sync agent.

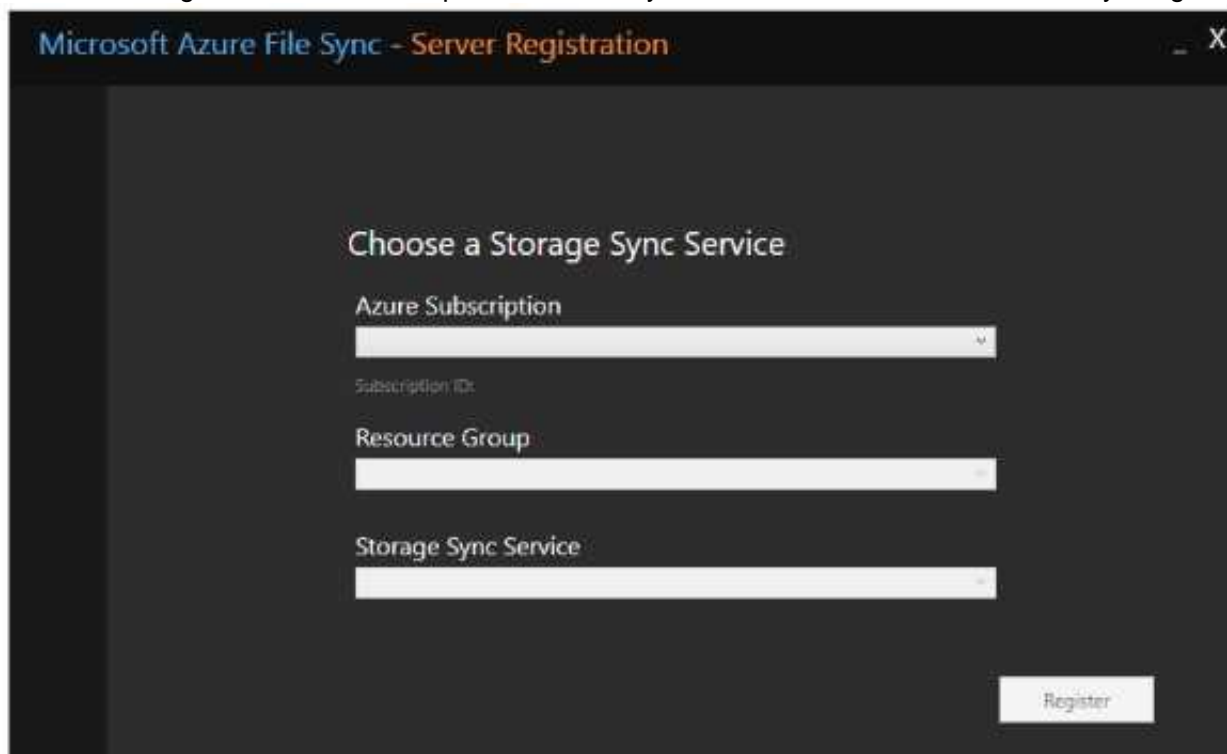

Incorrect Answers:

Not Install the Azure File Sync agent: The Azure File Sync agent is a downloadable package that enables Windows Server to be synced with an Azure file share.

NEW QUESTION 150

HOTSPOT

You have an Azure subscription named Subscription1 that is associated to an Azure Active Directory (Azure AD) tenant named AAD1.

Subscription1 contains the objects in the following table:

Name	Type
Share1	Azure file share
Account1	Azure Storage account
RG1	Resource group
Vault1	Recovery Services vault

You plan to create a single backup policy for Vault1. To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

You can create an Azure backup policy for:

AAD1 only
Account1 only
RG1 only
Share1 only
AAD1 and Share1 only
AAD1, Share1 and Account1 only
AAD1, Share1, Account1, and RG1

In the backup policy that you create, you can configure the backups to be retained for up to:

7 days
31 days
90 days
120 days
365 days
99 years

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: RG1 only Box 2: 99 years

With the latest update to Azure Backup, customers can retain their data for up to 99 years in Azure. Note: A backup policy defines a matrix of when the data snapshots are taken, and how long those snapshots are retained.

The backup policy interface looks like this:

The screenshot displays the Azure Backup Policy configuration interface. It includes the following sections:

- Policy name:** A text input field.
- Backup frequency:** Set to "Daily" at "5:30 AM" Local Time (UTC-07:00).
- Retention range:**
 - Retention of daily backup point:** Checked. "At" 5:30 AM, "For" 180 Day(s).
 - Retention of weekly backup point:** Checked. "On" Sunday, "At" 5:30 AM, "For" 104 Week(s).
 - Retention of monthly backup point:** Checked. "Week Based" selected. "On" First, "Day" Sunday, "At" 5:30 AM, "For" 60 Month(s).
 - Retention of yearly backup point:** Checked. "Week Based" selected. "In" January, "On" First, "Day" Sunday, "At" 5:30 AM, "For" 10 Year(s).

References: <https://docs.microsoft.com/en-us/azure/backup/backup-azure-vms-first-look-arm#defining-a-backup-policy>

<https://blogs.microsoft.com/firehose/2015/02/16/february-update-to-azure-backup-includes-data-retention-up-to-99-years-offline-backup-and-more/>

NEW QUESTION 151

HOTSPOT

You have an Azure subscription that contains a virtual network named VNet1. VNet1 uses an IP address space of 10.0.0.0/16 and contains the subnets in the following table.

Name	IP address range
Subnet0	10.0.0.0/24
Subnet1	10.0.1.0/24
Subnet2	10.0.2.0/24
GatewaySubnet	10.0.254.0/24

Subnet1 contains a virtual appliance named VM1 that operates as a router. You create a routing table named RT1. You need to route all inbound traffic to VNet1 through VM1. How should you configure RT1? To answer, select the appropriate options in the answer are a. NOTE: Each correct selection is worth one point.

Answer Area

Address prefix

10.0.0.0/16

10.0.1.0/24

10.0.254.0/24

Next hop type:

Virtual appliance

Virtual network

Virtual network gateway

Assigned to:

GatewaySubnet

Subnet0

Subnet1 and Subnet2

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Address prefix

▼

10.0.0.0/16

10.0.1.0/24

10.0.254.0/24

Next hop type:

▼

Virtual appliance

Virtual network

Virtual network gateway

Assigned to:

▼

GatewaySubnet

Subnet0

Subnet1 and Subnet2

NEW QUESTION 153

HOTSPOT

You have an Azure subscription1 that contains the resource shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VNET2	Virtual network	RG2
VM1	Virtual machine	RG2

The status of VM1 is Running. You assign an Azure policy as shown in the exhibit. (Click the Exhibit tab.) You assign the policy by using the following parameters.

Microsoft.ClassicNetwork/virtualNetworks

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

For each of the following statements, select YES if the statements is true. Otherwise, select No. Note: Each correct selection is worth one point.

• • • • •

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2.	<input type="radio"/>	<input type="radio"/>
The state of VM1 changed to deallocated.	<input type="radio"/>	<input type="radio"/>
An administrator can modify the address space of VNET2.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

• • • • •

Answer Area

Statements	Yes	No
An administrator can move VNET1 to RG2.	<input type="radio"/>	<input type="radio"/>
The state of VM1 changed to deallocated.	<input type="radio"/>	<input type="radio"/>
An administrator can modify the address space of VNET2.	<input type="radio"/>	<input type="radio"/>

NEW QUESTION 155

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VM1	Virtual machine	RG1

The Not allowed resources types Azure policy is assigned to RG1 and uses the following parameters:

Microsoft.Network/virtualNetworks

Microsoft.Compute/virtualMachines

In RG1, you need to create a new virtual named VM2, and then connected VM2 to VNET1. What should you do first?

- A. Add a subnet to VNET1.
- B. Remove Microsft.Network/virtualsNetwork from the policy.
- C. Creata an Azure resource Manager template.
- D. Remove Microsof
- E. Compute/virtualmachine from the policy

Answer: B

NEW QUESTION 159

You have an azure subscription named Subscription that contains the resource groups shown in the following table.

Name	Region
RG1	East Asia
RG2	East US

In RG1, you create a virtual machine named VM1 in the East Asia location. You plan to create a virtual network named VNET1. You need to create VNET, and then connect VM1 to VNET1. What are two possible ways to achieve this goal? Each correct answer presents a complete a solution. NOTE: Each correct selection is worth one point.

- A. Create VNET1 in RG2, and then set East Asia as the location.
- B. Create VNET1 in a new resource group in the West US location, and then set West US as the location.

- C. Create VNET1 in RG1, and then set East Asia as the location
- D. Create VNET1 in RG1, and then set East US as the location.
- E. Create VNET1 in RG2, and then set East US as the location.

Answer: AC

NEW QUESTION 162

Note: This question is part of a series of questions that present the same scenario goals. Some question sets might have more than one correct solution, while others in the series contains a unique solution that might meet the stated not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure web app named Appl. App1 runs in an Azure App Service plan named Plan1. Plan1 is associated to the Free pricing tier.

You discover that App1 stops each day after running continuously for 60 minutes.

You need to ensure that App1 can run continuously for the entire day. Solution: You add a triggered WebJob to App1.

Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

You need to change to Basic pricing Tier.

Note: The Free Tier provides 60 CPU minutes / day. This explains why App1 is stops. The Basic tier has no such cap.

References:

<https://azure.microsoft.com/en-us/pricing/details/app-service/windows/>

NEW QUESTION 163

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named Adatum and an Azure Subscription contains a resource group named Dev.d Subscription1. Adatum contains a group named Developers. Subscription!

You need to provide the Developers group with the ability to create Azure logic apps in the; Dev, resource group.

Solution: On Dev, you assign the Logic App Contributor role to the Developers group.

Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

The Logic App Contributor role lets you manage logic app, but not access to them. It provides access to view, edit, and update a logic app.

References:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app>

NEW QUESTION 167

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.

You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.

Solution: On Subscription1, you assign the Logic App Operator role to the Developers group. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

The Logic App Operator role only lets you read, enable and disable logic app. With it you can view the logic app and run history, and enable/disable. Cannot edit or update the definition.

You would need the Logic App Contributor role. References:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app>

NEW QUESTION 170

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Active Directory (Azure AD) tenant named Adatum and an Azure Subscription named Subscription1. Adatum contains a group named Developers. Subscription1 contains a resource group named Dev.

You need to provide the Developers group with the ability to create Azure logic apps in the Dev resource group.

Solution: On Subscription1, you assign the DevTest Labs User role to the Developers group. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

DevTest Labs User role only lets you connect, start, restart, and shutdown virtual machines in your Azure DevTest Labs.

You would need the Logic App Contributor role. References:

<https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles> <https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-securing-a-logic-app>

NEW QUESTION 174

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals.

Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to these questions will not appear m the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region.

VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server. You need to inspect all the network traffic from VM1 to VM2 for a period of three hours.

Solution: From Azure Network Watcher, you create a packet capture. Does this meet the goal?

A. Yes

B. No

Answer: A

Explanation:

Azure Network Watcher provides tools to monitor, diagnose, view metrics, and enable or disable logs for resources in an Azure virtual network.

Capture packets to and from a VM

Advanced filtering options and fine-tuned controls, such as the ability to set time and size limitations, provide versatility. The capture can be stored in Azure Storage, on the VM's disk, or both. You can then analyze the capture file using several standard network capture analysis tools.

Network Watcher variable packet capture allows you to create packet capture sessions to track traffic to and from a virtual machine. Packet capture helps to diagnose network anomalies both reactively and proactivity.

References:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview>

NEW QUESTION 177

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You manage a virtual network named VNet1 that is hosted in the West US Azure region. VNet1 hosts two virtual machines named VM1 and VM2 that run Windows Server.

You need to inspect all the network traffic from VM1 to VM2 for a period of three hours. Solution: From Azure Monitor, you create a metric on Network In and Network Out. Does this meet the goal?

A. Yes

B. No

Answer: B

Explanation:

You should use Azure Network Watcher. References:

<https://docs.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview>

NEW QUESTION 180

HOTSPOT

You create an Azure web app named WebApp1. WebApp1 has the autoscale settings shown in the following exhibit.

Autoscale setting name	Rule1
Resource group	VMRG
Instance count	1

Default Auto created scale condition	
Scale mode	<input type="radio"/> Scale based on a metric <input checked="" type="radio"/> Scale to a specific instance count
Instance count	<input type="text" value="1"/>
Schedule	This scale condition is executed when none of the other scale condition(s) match

Auto created scale condition 1

Scale mode

☒ Scale based on a metric
 ☐ Scale to a specific instance count

Scale out

When

Plan1

(Average) CpuPercentage > 80

Increase instance count by 2

Rules

Scale in

When

Plan1

(Average) CpuPercentage > 25

Decrease instance count by 1

+Add a rule

Instance limits

Minimum ⓘ

Maximum ⓘ

Default ⓘ

2

10

4

Schedule

☒ Specify start/end dates
 ☐ Repeat specific days

Timezone

(UTC+01:00) Amsterdam, Berlin, Bern, Rome, Sto.. ▼

Start date

2018-07-01

12:00:00 AM

End date

2018-07-31

11:59:00 PM

The scale out and scale in rules are configured to have a duration of 10 minutes and a cool down time of five minutes.
Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

If on August 8, 2018, WebApp1 is used at more than 85 percent for 15 minutes, WebApp1 will be running **[answer choice]**.

▼

one instance

two instances

four instances

six instances

ten instances

If on July8, 2018, WebApp1 is used at less than 15 percent for 60 minutes, WebApp1 will be running **[answer choice]**.

▼

one instance

two instances

three instances

four instances

six instances

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

If on August 8, 2018, WebApp1 is used at more than 85 percent for 15 minutes, WebApp1 will be running **[answer choice]**.

▼

one instance

two instances

four instances

six instances

ten instances

If on July8, 2018, WebApp1 is used at less than 15 percent for 60 minutes, WebApp1 will be running **[answer choice]**.

▼

one instance

two instances

three instances

four instances

six instances

NEW QUESTION 182**DRAG DROP**

You have an Azure subscription that contains an Azure Service Bus named Bus1.

Your company plans to deploy two Azure web apps named App1 and App2. The web apps will create messages that have the following requirements:

? Each message created by App1 must be consumed by only a single consumer

? Each message created by App2 will be consumed by multiple consumers.

Which resource should you create for each web app? To answer, drag the appropriate resources to the correct web apps. Each resource may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Resource

A Service Bus queue

A Service Bus topic

An Azure Event Grid topic

Azure Blob storage

Answer Area

App1

App2

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Answer Area

App1

A Service Bus queue

App2

A Service Bus topic

NEW QUESTION 185

A web developer creates a web application that you plan to deploy as an Azure web app.

Users must enter credentials to access the web application.

You create a new web app named WebApp1 and deploy the web application to WebApp1.

You need to disable anonymous access to WebApp1. What should you configure?

- A. Advanced Tools
B. Authentication/ Authorization
C. Access control (IAM)
D. Deployment credentials

Answer: B

Explanation:

Anonymous access is an authentication method. It allows users to establish an anonymous connection.

References:

<https://docs.microsoft.com/en-us/biztalk/core/guidelines-for-resolving-iis-permissions-problems>

NEW QUESTION 190

You are building a custom Azure function app to connect to Azure Event Grid.

You need to ensure that resources are allocated dynamically to the function app. Billing must be based on the executions of the app.

What should you configure when you create the function app?

- A. the Windows operating system and the Consumption plan hosting plan
B. the Windows operating system and the App Service plan hosting plan
C. the Docker container and an App Service plan that uses the B1 pricing tier
D. the Docker container and an App Service plan that uses the S1 pricing

Answer: A

Explanation:

Azure Functions runs in two different modes: Consumption plan and Azure App Service plan. The Consumption plan automatically allocates compute power when your code is running. Your app is scaled out when needed to handle load, and scaled down when code is not running.

Incorrect Answers:

B: When you run in an App Service plan, you must manage the scaling of your function app. References:

<https://docs.microsoft.com/en-us/azure/azure-functions/functions-create-first-azure-function>

NEW QUESTION 192**HOTSPOT**

You have an Azure web app named WebApp1 that runs in an Azure App Service plan named ASP1. ASP1 is based on the D1 pricing tier.

You need to ensure that WebApp1 can be accessed only from computers on your on-premises network. The solution must minimize costs.

What should you configure? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Pricing tier for ASP1:

	▼
B1	
P1v2	
S1	

Settings for WebApp1:

	▼
Cross-origin resource sharing(CORS)	
Networking	
SSL	

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Box 1: B1

B1 (Basic) would minimize cost compared P1v2 (premium) and S1 (standard). Box 2: Cross Origin Resource Sharing (CORS)

Once you set the CORS rules for the service, then a properly authenticated request made against the service from a different domain will be evaluated to determine whether it is allowed according to the rules you have specified.

Note: CORS (Cross Origin Resource Sharing) is an HTTP feature that enables a web application running under one domain to access resources in another domain. In order to reduce the possibility of cross-site scripting attacks, all modern web browsers implement a security restriction known as same-origin policy. This prevents a web page from calling APIs in a different domain. CORS provides a secure way to allow one origin (the origin domain) to call APIs in another origin.

References:

<https://azure.microsoft.com/en-us/pricing/details/app-service/windows/> <https://docs.microsoft.com/en-us/azure/cdn/cdn-cors>

NEW QUESTION 196

You have a Microsoft SQL Server Always On availability group on Azure virtual machines. You need to configure an Azure internal load balancer as a listener for the availability group. What should you do?

- A. Enable Floating IP.
B. Set Session persistence to Client IP and protocol.
C. Set Session persistence to Client IP.
D. Create an HTTP health probe on port 1433.

Answer: A

Explanation:

Incorrect Answers:

D: The Health probe is created with the TCP protocol, not with the HTTP protocol. References:

<https://docs.microsoft.com/en-us/azure/virtual-machines/windows/sql/virtual-machines-windows-portal-sql-alwayson-int-listener>

NEW QUESTION 201

You have an Azure subscription.

Users access the resources in the subscription from either home or from customer sites. From home, users must establish a point-to-site VPN to access the Azure resources. The users on the customer sites access the Azure resources by using site-to-site VPNs.

You have a line-of-business app named App1 that runs on several Azure virtual machine. The virtual machines run Windows Server 2016.

You need to ensure that the connections to App1 are spread across all the virtual machines.

What are two possible Azure services that you can use? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. a public load balancer
B. Traffic Manager
C. an Azure Content Delivery Network (CDN)
D. an internal load balancer
E. an Azure Application Gateway

Answer: DE

NEW QUESTION 202

DRAG DROP

You have an Azure subscription that contains the following resources:

- a virtual network named VNet1
- a replication policy named ReplPolicy1
- a Recovery Services vault named Vault1
- an Azure Storage account named Storage1

You have an Amazon Web Services (AWS) EC2 virtual machine named VM1 that runs Windows Server

You need to migrate VM1 to VNet1 by using Azure Site Recovery.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the

correct order.

Actions	Answer Area
Install Azure Site Recovery Unified Setup.	
Create an Azure Migrate project.	
Enable Windows PowerShell remoting on VM1.	⬅️
Deploy an EC2 virtual machine as a configuration server.	➡️
Enable replication for VM1.	⬆️

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Deploy an EC2 virtual machine as a configuration server Prepare source include:

1. Use an EC2 instance that's running Windows Server 2012 R2 to create a configuration server and register it with your recovery vault.
2. Configure the proxy on the EC2 instance VM you're using as the configuration server so that it can access the service URLs.

Step 2: Install Azure Site Recovery Unified Setup.

Download Microsoft Azure Site Recovery Unified Setup. You can download it to your local machine and then copy it to the VM you're using as the configuration server.

Step 3: Enable replication for VM1.

Enable replication for each VM that you want to migrate. When replication is enabled, Site Recovery automatically installs the Mobility service.

References:

<https://docs.microsoft.com/en-us/azure/site-recovery/migrate-tutorial-aws-azure>

NEW QUESTION 205

You have an on-premises network that contains a Hyper-V host named Host1. Host1 runs Windows Server 2016 and hosts 10 virtual machines that run Windows Server 2016.

You plan to replicate the virtual machines to Azure by using Azure Site Recovery. You create a Recovery Services vault named ASR1 and a Hyper-V site named Site1.

You need to add Host1 to ASR1. What should you do?

- A. Download the installation file for the Azure Site Recovery Provide
- B. Download the vault registration key.Install the Azure Site Recovery Provider on Host1 and register the server.
- C. Download the installation file for the Azure Site Recovery Provide
- D. Download the storage account key.Install the Azure Site Recovery Provider on Host1 and register the server.
- E. Download the installation file for the Azure Site Recovery Provide
- F. Download the vault registration key.Install the Azure Site Recovery Provider on each virtual machine and register the virtual machines.
- G. Download the installation file for the Azure Site Recovery Provide
- H. Download the storage account key.Install the Azure Site Recovery Provider on each virtual machine and register the virtual machines.

Answer: A

Explanation:

Download the Vault registration key. You need this when you install the Provider. The key is valid for five days after you generate it.

Install the Provider on each VMM server. You don't need to explicitly install anything on Hyper-V hosts.

Incorrect Answers:

B, D: Use the Vault Registration Key, not the storage account key. References:

<https://docs.microsoft.com/en-us/azure/site-recovery/migrate-tutorial-on-premises-azure>

NEW QUESTION 206

You have an Azure subscription that contains a virtual network named VNet1. VNet 1 has two subnets named Subnet1 and Subnet2. VNet1 is in the West Europe Azure region.

The subscription contains the virtual machines in the following table.

Name	Connected to
VM1	Subnet1
VM2	Subnet1
VM3	Subnet2

You need to deploy an application gateway named AppGW1 to VNet1. What should you do first?

- A. Add a service endpoint.
- B. Add a virtual network.
- C. Move VM3 to Subnet1.
- D. Stop VM1 and VM2.

Answer: D

Explanation:

If you have an existing virtual network, either select an existing empty subnet or create a new subnet in your existing virtual network solely for use by the application gateway.

Verify that you have a working virtual network with a valid subnet. Make sure that no virtual machines or cloud deployments are using the subnet. The application gateway must be by itself in a virtual network subnet.

References:

<https://social.msdn.microsoft.com/Forums/azure/en-US/b09367f9-5d01-4cda-9127-b7a506a0a151/cant-create-application-gateway?forum=WAVirtualMachinesVirtualNetwork> <https://docs.microsoft.com/en-us/azure/application-gateway/application-gateway-create-gateway>

NEW QUESTION 211

You have an Azure Logic App named App1. App1 provides a response when an HTTP POST request or an HTTP GET request is received.

During peak periods, App1 is expected to receive up to 200,000 requests in a five-minute period. You need to ensure that App1 can handle the expected load. What should you configure?

- A. Access control (IAM)
- B. API connections
- C. Workflow settings
- D. Access keys

Answer: C

Explanation:

References:

<https://docs.microsoft.com/en-us/azure/logic-apps/logic-apps-limits-and-config#throughput-limits>

NEW QUESTION 213

You have a Basic App Service plan named ASP1 that hosts an Azure App Service named App1. You need to configure a custom domain and enable backups for App1.

What should you do first?

- A. Configure a WebJob for App1.
- B. Scale up ASP1.
- C. Scale out ASP1.
- D. Configure the application settings for App1.

Answer: D

NEW QUESTION 215

HOTSPOT

You have an Azure subscription named Subscription1.

In Subscription1, you create an Azure web app named WebApp1. WebApp1 will access an external service that requires certificate authentication.

You plan to require the use of HTTPS to access WebApp1. You need to upload certificates to WebApp1.

In which formats should you upload the certificate? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Certificate format for HTTPS access:

<input type="checkbox"/>
CER
CRL
CRT
PFX

Certificate format for external service access:

<input type="checkbox"/>
CER
CRL
CRT
PFX

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

A PFX file contains the public key file (SSL Certificate) and its unique private key file. This is required for HTTPS access. The web app will distribute the public key (in a CER file) to clients that connect to the web app.

The CER file is an SSL Certificate which has the public key of the external service. The external service will have the private key associated with the public key contained in the CER file.

NEW QUESTION 217

You have an Azure web app named App1 that streams video content to users. App1 is located in the East US Azure region. Users in North America stream the video content without any interruption. Users in Asia and Europe report that the video buffer often and do not play back smoothly. You need to recommend a solution to improve video streaming to the European and Asian users. What should you recommend?

- A. Scale out the App Service plan.
- B. Scale up the App Service plan.
- C. Configure an Azure Content Delivery Network (CDN) endpoint.
- D. Configure Azure File Sync.

Answer: C

NEW QUESTION 219

You are troubleshooting a performance issue for an Azure Application Gateway. You need to compare the total requests to the failed requests during the past six hours. What should you use?

- A. Metrics in Application Gateway
- B. Diagnostics logs in Application Gateway
- C. NSG flow logs in Azure Network Watcher
- D. Connection monitor in Azure Network Watcher

Answer: A

Explanation:

Application Gateway currently has seven metrics to view performance counters. Metrics are a feature for certain Azure resources where you can view performance counters in the portal. For Application Gateway, the following metrics are available:

- ? Total Requests
- ? Failed Requests
- ? Current Connections
- ? Healthy Host Count
- ? Response Status
- ? Throughput
- ? Unhealthy Host count

You can filter on a per backend pool basis to show healthy/unhealthy hosts in a specific backend pool

References: <https://docs.microsoft.com/en-us/azure/application-gateway/application-gatewaydiagnostics#Metrics>

NEW QUESTION 224

You have two Azure virtual networks named VNet1 and VNet2. VNet1 contains an Azure virtual machine named VM1. VNet2 contains an Azure virtual machine named VM2. VM1 hosts a frontend application that connects to VM2 to retrieve data. Users report that the frontend application is slower than usual. You need to view the average round-trip time (RTT) of the packets from VM1 to VM2. Which Azure Network Watcher feature should you use?

- A. NSG flow logs
- B. Connection troubleshoot
- C. IP flow verify
- D. Connection monitor

Answer: D

Explanation:

The Connection Monitor feature in Azure Network Watcher is now generally available in all public regions. Connection Monitor provides you RTT values on a per-minute granularity. You can monitor a direct TCP connection from a virtual machine to a virtual machine, FQDN, URI, or IPv4 address. References: <https://azure.microsoft.com/en-us/updates/general-availability-azure-network-watcher-connection-monitor-in-all-public-regions/>

NEW QUESTION 227

You are the global administrator for an Azure Active Directory (Azure AD) tenant named adatum.com. From the Azure Active Directory blade, you assign the Conditional Access Administrator role to a user. You need to ensure that Admin1 has just-in-time access as a conditional access administrator. What should you do next?

- A. Enable Azure AD Multi-Factor Authentication (MFA).
- B. Set Admin1 as Eligible for the Privileged Role Administrator role.
- C. Admin1 as Eligible for the Conditional Access Administrator role.
- D. Enable Azure AD Identity Protection.

Answer: A

Explanation:

Require MFA for admins is a baseline policy that requires MFA for the following directory roles:

- ? Global administrator
- ? SharePoint administrator
- ? Exchange administrator
- ? Conditional access administrator
- ? Security administrator

References: <https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/baseline-protection>

NEW QUESTION 228

You are the global administrator for an Azure Active Directory (Azure AD) tenant named adatum.com. You need to enable two-step verification for Azure users. What should you do?

- A. Create a sign-in risk policy in Azure AD Identity Protection
- B. Enable Azure AD Privileged Identity Management.
- C. Create and configure the Identity Hub.
- D. Configure a security policy in Azure Security Center.

Answer: A

Explanation:

With Azure Active Directory Identity Protection, you can:

? require users to register for multi-factor authentication

? handle risky sign-ins and compromised users References:

<https://docs.microsoft.com/en-us/azure/active-directory/identity-protection/flows>

NEW QUESTION 233

You have an Azure subscription named Subscription1 that contains an Azure virtual machine named VM1. VM1 is in a resource group named RG1.

VM1 runs services that will be used to deploy resources to RG1.

You need to ensure that a service running on VM1 can manage the resources in RG1 by using the identity of VM1. What should you do first -

- A. From the Azure portal modify the Access control (IAM) settings of VM1.
- B. From the Azure portal, modify the Policies settings of RG1.
- C. From the Azure portal, modify the value of the Managed Service Identity option for VM1.
- D. From the Azure portal, modify the Access control (IAM) settings of RG1.

Answer: C

Explanation:

A managed identity from Azure Active Directory allows your app to easily access other AAD-protected resources such as Azure Key Vault. The identity is managed by the Azure platform and does not require you to provision or rotate any secrets.

User assigned managed identities can be used on Virtual Machines and Virtual Machine Scale Sets. References:

<https://docs.microsoft.com/en-us/azure/app-service/app-service-managed-service-identity>

NEW QUESTION 238

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your AZ-103 Exam with Our Prep Materials Via below:

<https://www.certleader.com/AZ-103-dumps.html>