

## 156-315.81 Dumps

### Check Point Certified Security Expert R81

<https://www.certleader.com/156-315.81-dumps.html>



**NEW QUESTION 1**

- (Exam Topic 1)

Which of the following is a new R81 Gateway feature that had not been available in R77.X and older?

- A. The rule base can be built of layers, each containing a set of the security rule
- B. Layers are inspected in the order in which they are defined, allowing control over the rule base flow and which security functionalities take precedence.
- C. Limits the upload and download throughput for streaming media in the company to 1 Gbps.
- D. Time object to a rule to make the rule active only during specified times.
- E. Sub Policies are sets of rules that can be created and attached to specific rule
- F. If the rule is matched, inspection will continue in the sub policy attached to it rather than in the next rule.

**Answer:** D

**NEW QUESTION 2**

- (Exam Topic 1)

Fill in the blank: The R81 utility fw monitor is used to troubleshoot .

- A. User data base corruption
- B. LDAP conflicts
- C. Traffic issues
- D. Phase two key negotiations

**Answer:** C

**Explanation:**

Check Point's FW Monitor is a powerful built-in tool for capturing network traffic at the packet level. The FW Monitor utility captures network packets at multiple capture points along the FireWall inspection chains. These captured packets can be inspected later using the WireShark.

**NEW QUESTION 3**

- (Exam Topic 1)

Which command can you use to verify the number of active concurrent connections?

- A. fw conn all
- B. fw ctl pstat
- C. show all connections
- D. show connections

**Answer:** B

**NEW QUESTION 4**

- (Exam Topic 1)

Which TCP-port does CPM process listen to?

- A. 18191
- B. 18190
- C. 8983
- D. 19009

**Answer:** D

**NEW QUESTION 5**

- (Exam Topic 1)

Fill in the blank: The tool \_\_\_\_\_ generates a R81 Security Gateway configuration report.

- A. infoCP
- B. infoview
- C. cpinfo
- D. fw cpinfo

**Answer:** C

**NEW QUESTION 6**

- (Exam Topic 1)

You are working with multiple Security Gateways enforcing an extensive number of rules. To simplify security administration, which action would you choose?

- A. Eliminate all possible contradictory rules such as the Stealth or Cleanup rules.
- B. Create a separate Security Policy package for each remote Security Gateway.
- C. Create network objects that restricts all applicable rules to only certain networks.
- D. Run separate SmartConsole instances to login and configure each Security Gateway directly.

**Answer:** B

**NEW QUESTION 7**

- (Exam Topic 1)

What Factor preclude Secure XL Templating?

- A. Source Port Ranges/Encrypted Connections
- B. IPS
- C. ClusterXL in load sharing Mode
- D. CoreXL

**Answer:** A

**NEW QUESTION 8**

- (Exam Topic 1)

Full synchronization between cluster members is handled by Firewall Kernel. Which port is used for this?

- A. UDP port 265
- B. TCP port 265
- C. UDP port 256
- D. TCP port 256

**Answer:** D

**Explanation:**

Synchronization works in two modes:

Full Sync transfers all Security Gateway kernel table information from one cluster member to another. It is handled by the fwd daemon using an encrypted TCP connection on port 256.

Delta Sync transfers changes in the kernel tables between cluster members. Delta sync is handled by the Security Gateway kernel using UDP connections on port 8116.

**NEW QUESTION 9**

- (Exam Topic 1)

Your manager asked you to check the status of SecureXL, and its enabled templates and features. What command will you use to provide such information to manager?

- A. fw accel stat
- B. fwaccel stat
- C. fw acces stats
- D. fwaccel stats

**Answer:** B

**NEW QUESTION 10**

- (Exam Topic 1)

What happen when IPS profile is set in Detect Only Mode for troubleshooting?

- A. It will generate Geo-Protection traffic
- B. Automatically uploads debugging logs to Check Point Support Center
- C. It will not block malicious traffic
- D. Bypass licenses requirement for Geo-Protection control

**Answer:** C

**Explanation:**

It is recommended to enable Detect-Only for Troubleshooting on the profile during the initial installation of IPS. This option overrides any protections that are set to Prevent so that they will not block any traffic.

During this time you can analyze the alerts that IPS generates to see how IPS will handle network traffic, while avoiding any impact on the flow of traffic.

**NEW QUESTION 10**

- (Exam Topic 1)

Which statement is NOT TRUE about Delta synchronization?

- A. Using UDP Multicast or Broadcast on port 8161
- B. Using UDP Multicast or Broadcast on port 8116
- C. Quicker than Full sync
- D. Transfers changes in the Kernel tables between cluster members.

**Answer:** A

**NEW QUESTION 12**

- (Exam Topic 1)

To help SmartEvent determine whether events originated internally or externally you must define using the Initial Settings under General Settings in the Policy Tab. How many options are available to calculate the traffic direction?

- A. 5 Network; Host; Objects; Services; API
- B. 3 Incoming; Outgoing; Network
- C. 2 Internal; External
- D. 4 Incoming; Outgoing; Internal; Other

**Answer:** D

**NEW QUESTION 14**

- (Exam Topic 1)

The fwd process on the Security Gateway sends logs to the fwd process on the Management Server via which 2 processes?

- A. fwd via cpm
- B. fwm via fwd
- C. cpm via cpd
- D. fwd via cpd

**Answer: A**

**NEW QUESTION 15**

- (Exam Topic 1)

Which is the least ideal Synchronization Status for Security Management Server High Availability deployment?

- A. Synchronized
- B. Never been synchronized
- C. Lagging
- D. Collision

**Answer: D**

**NEW QUESTION 17**

- (Exam Topic 1)

What is the limitation of employing Sticky Decision Function?

- A. With SDF enabled, the involved VPN Gateways only supports IKEv1
- B. Acceleration technologies, such as SecureXL and CoreXL are disabled when activating SDF
- C. With SDF enabled, only ClusterXL in legacy mode is supported
- D. With SDF enabled, you can only have three Sync interfaces at most

**Answer: B**

**NEW QUESTION 21**

- (Exam Topic 1)

Tom has been tasked to install Check Point R81 in a distributed deployment. Before Tom installs the systems this way, how many machines will he need if he does NOT include a SmartConsole machine in his calculations?

- A. One machine, but it needs to be installed using SecurePlatform for compatibility purposes.
- B. One machine
- C. Two machines
- D. Three machines

**Answer: C**

**Explanation:**

One for Security Management Server and the other one for the Security Gateway.

**NEW QUESTION 23**

- (Exam Topic 1)

Which command would disable a Cluster Member permanently?

- A. clusterXL\_admin down
- B. cphaprob\_admin down
- C. clusterXL\_admin down-p
- D. set clusterXL down-p

**Answer: C**

**NEW QUESTION 27**

- (Exam Topic 1)

In R81, how do you manage your Mobile Access Policy?

- A. Through the Unified Policy
- B. Through the Mobile Console
- C. From SmartDashboard
- D. From the Dedicated Mobility Tab

**Answer: A**

**NEW QUESTION 30**

- (Exam Topic 1)

When doing a Stand-Alone Installation, you would install the Security Management Server with which other Check Point architecture component?

- A. None, Security Management Server would be installed by itself.
- B. SmartConsole

- C. SecureClient
- D. Security Gateway
- E. SmartEvent

**Answer:** D

**NEW QUESTION 33**

- (Exam Topic 1)

Which of the following statements is TRUE about R81 management plug-ins?

- A. The plug-in is a package installed on the Security Gateway.
- B. Installing a management plug-in requires a Snapshot, just like any upgrade process.
- C. A management plug-in interacts with a Security Management Server to provide new features and support for new products.
- D. Using a plug-in offers full central management only if special licensing is applied to specific features of the plug-in.

**Answer:** C

**NEW QUESTION 36**

- (Exam Topic 1)

What SmartEvent component creates events?

- A. Consolidation Policy
- B. Correlation Unit
- C. SmartEvent Policy
- D. SmartEvent GUI

**Answer:** B

**NEW QUESTION 39**

- (Exam Topic 1)

In R81 spoofing is defined as a method of:

- A. Disguising an illegal IP address behind an authorized IP address through Port Address Translation.
- B. Hiding your firewall from unauthorized users.
- C. Detecting people using false or wrong authentication logins
- D. Making packets appear as if they come from an authorized IP address.

**Answer:** D

**Explanation:**

IP spoofing replaces the untrusted source IP address with a fake, trusted one, to hijack connections to your network. Attackers use IP spoofing to send malware and bots to your protected network, to execute DoS attacks, or to gain unauthorized access.

**NEW QUESTION 40**

- (Exam Topic 1)

What are the attributes that SecureXL will check after the connection is allowed by Security Policy?

- A. Source address, Destination address, Source port, Destination port, Protocol
- B. Source MAC address, Destination MAC address, Source port, Destination port, Protocol
- C. Source address, Destination address, Source port, Destination port
- D. Source address, Destination address, Destination port, Protocol

**Answer:** A

**NEW QUESTION 42**

- (Exam Topic 1)

You have successfully backed up Check Point configurations without the OS information. What command would you use to restore this backup?

- A. restore\_backup
- B. import backup
- C. cp\_merge
- D. migrate import

**Answer:** D

**NEW QUESTION 44**

- (Exam Topic 1)

What command verifies that the API server is responding?

- A. api stat
- B. api status
- C. show api\_status
- D. app\_get\_status

**Answer:** B

**NEW QUESTION 46**

- (Exam Topic 2)

As an administrator, you may be required to add the company logo to reports. To do this, you would save the logo as a PNG file with the name 'cover-company-logo.png' and then copy that image file to which directory on the SmartEvent server?

- A. SFWDIR/smartevent/conf
- B. \$RTDIR/smartevent/conf
- C. \$RTDIR/smartview/conf
- D. \$FWDIR/smartview/conf

**Answer: C**

**NEW QUESTION 49**

- (Exam Topic 2)

Which process is available on any management product and on products that require direct GUI access, such as SmartEvent and provides GUI client communications, database manipulation, policy compilation and Management HA synchronization?

- A. cpwd
- B. fwd
- C. cpd
- D. fwm

**Answer: D**

**Explanation:**

Firewall Management (fwm) is available on any management product, including Multi-Domain and on products that require direct GUI access, such as SmartEvent, It provides the following:

- GUI Client communication
- Database manipulation
- Policy Compilation
- Management HA sync

**NEW QUESTION 53**

- (Exam Topic 2)

As a valid Mobile Access Method, what feature provides Capsule Connect/VPN?

- A. That is used to deploy the mobile device as a generator of one-time passwords for authenticating to an RSA Authentication Manager.
- B. Full Layer4 VPN –SSL VPN that gives users network access to all mobile applications.
- C. Full Layer3 VPN –IPSec VPN that gives users network access to all mobile applications.
- D. You can make sure that documents are sent to the intended recipients only.

**Answer: C**

**NEW QUESTION 57**

- (Exam Topic 2)

You are investigating issues with to gateway cluster members are not able to establish the first initial cluster synchronization. What service is used by the FWD daemon to do a Full Synchronization?

- A. TCP port 443
- B. TCP port 257
- C. TCP port 256
- D. UDP port 8116

**Answer: C**

**NEW QUESTION 58**

- (Exam Topic 2)

In the Check Point Firewall Kernel Module, each Kernel is associated with a key, which specifies the type of traffic applicable to the chain module. For Wire Mode configuration, chain modules marked with \_\_\_\_\_ will not apply.

- A. ffff
- B. 1
- C. 2
- D. 3

**Answer: B**

**NEW QUESTION 62**

- (Exam Topic 2)

Which encryption algorithm is the least secured?

- A. AES-128
- B. AES-256
- C. DES
- D. 3DES

**Answer: C**

**NEW QUESTION 63**

- (Exam Topic 2)

Which command shows the current connections distributed by CoreXL FW instances?

- A. fw ctl multik stat
- B. fw ctl affinity -l
- C. fw ctl instances -v
- D. fw ctl iflist

**Answer: A**

**NEW QUESTION 64**

- (Exam Topic 2)

The Correlation Unit performs all but the following actions:

- A. Marks logs that individually are not events, but may be part of a larger pattern to be identified later.
- B. Generates an event based on the Event policy.
- C. Assigns a severity level to the event.
- D. Takes a new log entry that is part of a group of items that together make up an event, and adds it to an ongoing event.

**Answer: C**

**NEW QUESTION 68**

- (Exam Topic 2)

Which command shows detailed information about VPN tunnels?

- A. cat \$FWDIR/conf/vpn.conf
- B. vpn tu tlist
- C. vpn tu
- D. cpview

**Answer: B**

**NEW QUESTION 71**

- (Exam Topic 2)

What command can you use to have cpinfo display all installed hotfixes?

- A. cpinfo -hf
- B. cpinfo -y all
- C. cpinfo -get hf
- D. cpinfo installed\_jumbo

**Answer: B**

**NEW QUESTION 72**

- (Exam Topic 2)

When an encrypted packet is decrypted, where does this happen?

- A. Security policy
- B. Inbound chain
- C. Outbound chain
- D. Decryption is not supported

**Answer: A**

**NEW QUESTION 74**

- (Exam Topic 2)

Using mgmt\_cli, what is the correct syntax to import a host object called Server\_1 from the CLI?

- A. mgmt\_cli add-host "Server\_1" ip\_address "10.15.123.10" --format txt
- B. mgmt\_cli add host name "Server\_1" ip-address "10.15.123.10" --format json
- C. mgmt\_cli add object-host "Server\_1" ip-address "10.15.123.10" --format json
- D. mgmt\_cli add object "Server-1" ip-address "10.15.123.10" --format json

**Answer: B**

**Explanation:**

Example:

mgmt\_cli add host name "New Host 1" ip-address "192.0.2.1" --format json

• "--format json" is optional. By default the output is presented in plain text.

**NEW QUESTION 77**

- (Exam Topic 2)

Customer's R81 management server needs to be upgraded to R81.10. What is the best upgrade method when the management server is not connected to the Internet?

- A. Export R81 configuration, clean install R81.10 and import the configuration
- B. CPUSE offline upgrade
- C. CPUSE online upgrade
- D. SmartUpdate upgrade

**Answer: C**

**NEW QUESTION 81**

- (Exam Topic 2)

When installing a dedicated R81 SmartEvent server. What is the recommended size of the root partition?

- A. Any size
- B. Less than 20GB
- C. More than 10GB and less than 20GB
- D. At least 20GB

**Answer: D**

**NEW QUESTION 83**

- (Exam Topic 2)

SmartEvent has several components that function together to track security threats. What is the function of the Correlation Unit as a component of this architecture?

- A. Analyzes each log entry as it arrives at the log server according to the Event Policy
- B. When a threat pattern is identified, an event is forwarded to the SmartEvent Server.
- C. Correlates all the identified threats with the consolidation policy.
- D. Collects syslog data from third party devices and saves them to the database.
- E. Connects with the SmartEvent Client when generating threat reports.

**Answer: A**

**NEW QUESTION 84**

- (Exam Topic 2)

Which one of the following is true about Threat Emulation?

- A. Takes less than a second to complete
- B. Works on MS Office and PDF files only
- C. Always delivers a file
- D. Takes minutes to complete (less than 3 minutes)

**Answer: D**

**NEW QUESTION 86**

- (Exam Topic 2)

What is the port used for SmartConsole to connect to the Security Management Server?

- A. CPMI port 18191/TCP
- B. CPM port/TCP port 19009
- C. SIC port 18191/TCP
- D. https port 4434/TCP

**Answer: A**

**NEW QUESTION 91**

- (Exam Topic 2)

How do you enable virtual mac (VMAC) on-the-fly on a cluster member?

- A. cphaprob set int fwha\_vmac\_global\_param\_enabled 1
- B. clusterXL set int fwha\_vmac\_global\_param\_enabled 1
- C. fw ctl set int fwha\_vmac\_global\_param\_enabled 1
- D. cphaconf set int fwha\_vmac\_global\_param\_enabled 1

**Answer: C**

**NEW QUESTION 94**

- (Exam Topic 3)

Joey wants to upgrade from R75.40 to R81 version of Security management. He will use Advanced Upgrade with Database Migration method to achieve this. What is one of the requirements for his success?

- A. Size of the /var/log folder of the source machine must be at least 25% of the size of the /var/log directory on the target machine
- B. Size of the /var/log folder of the target machine must be at least 25% of the size of the /var/log directory on the source machine
- C. Size of the \$FWDIR/log folder of the target machine must be at least 30% of the size of the \$FWDIR/log directory on the source machine
- D. Size of the /var/log folder of the target machine must be at least 25GB or more

**Answer: B**

**NEW QUESTION 96**

- (Exam Topic 3)

What statement best describes the Proxy ARP feature for Manual NAT in R81.10?

- A. Automatic proxy ARP configuration can be enabled
- B. Translate Destination on Client Side should be configured
- C. fw ctl proxy should be configured
- D. local.arp file must always be configured

**Answer: D**

**NEW QUESTION 97**

- (Exam Topic 3)

The \_\_\_\_\_ software blade package uses CPU-level and OS-level sandboxing in order to detect and block malware.

- A. Next Generation Threat Prevention
- B. Next Generation Threat Emulation
- C. Next Generation Threat Extraction
- D. Next Generation Firewall

**Answer: B**

**NEW QUESTION 100**

- (Exam Topic 3)

Which SmartConsole tab is used to monitor network and security performance?

- A. Manage Setting
- B. Security Policies
- C. Gateway and Servers
- D. Logs and Monitor

**Answer: D**

**NEW QUESTION 104**

- (Exam Topic 3)

What is true of the API server on R81.10?

- A. By default the API-server is activated and does not have hardware requirements.
- B. By default the API-server is not active and should be activated from the WebUI.
- C. By default the API server is active on management and stand-alone servers with 16GB of RAM (or more).
- D. By default, the API server is active on management servers with 4 GB of RAM (or more) and on stand-alone servers with 8GB of RAM (or more).

**Answer: D**

**NEW QUESTION 105**

- (Exam Topic 3)

Which statement is most correct regarding about "CoreXL Dynamic Dispatcher"?

- A. The CoreXL FW instances assignment mechanism is based on Source MAC addresses, Destination MAC addresses
- B. The CoreXL FW instances assignment mechanism is based on the utilization of CPU cores
- C. The CoreXL FW instances assignment mechanism is based on IP Protocol type
- D. The CoreXL FW instances assignment mechanism is based on Source IP addresses, Destination IP addresses, and the IP 'Protocol' type

**Answer: B**

**NEW QUESTION 108**

- (Exam Topic 3)

Which file contains the host address to be published, the MAC address that needs to be associated with the IP Address, and the unique IP of the interface that responds to ARP request?

- A. /opt/CPshrd-R81/conf/local.arp
- B. /var/opt/CPshrd-R81/conf/local.arp
- C. \$CPDIR/conf/local.arp
- D. \$FWDIR/conf/local.arp

**Answer: D**

**NEW QUESTION 113**

- (Exam Topic 3)

What command would show the API server status?

- A. cpm status
- B. api restart
- C. api status
- D. show api status

**Answer:**

C

**NEW QUESTION 114**

- (Exam Topic 3)

Which of the following is NOT an option to calculate the traffic direction?

- A. Incoming
- B. Internal
- C. External
- D. Outgoing

**Answer: D**

**NEW QUESTION 118**

- (Exam Topic 3)

Capsule Connect and Capsule Workspace both offer secured connection for remote users who are using their mobile devices. However, there are differences between the two.

Which of the following statements correctly identify each product's capabilities?

- A. Workspace supports ios operating system, Android, and WP8, whereas Connect supports ios operating system and Android only
- B. For compliance/host checking, Workspace offers the MDM cooperative enforcement, whereas Connect offers both jailbreak/root detection and MDM cooperative enforcement.
- C. For credential protection, Connect uses One-time Password login support and has no SSO support, whereas Workspace offers both One-Time Password and certain SSO login support.
- D. Workspace can support any application, whereas Connect has a limited number of application types which it will support.

**Answer: C**

**NEW QUESTION 123**

- (Exam Topic 3)

In which formats can Threat Emulation forensics reports be viewed in?

- A. TXT, XML and CSV
- B. PDF and TXT
- C. PDF, HTML, and XML
- D. PDF and HTML

**Answer: C**

**NEW QUESTION 128**

- (Exam Topic 3)

What kind of information would you expect to see using the sim affinity command?

- A. The VMACs used in a Security Gateway cluster
- B. The involved firewall kernel modules in inbound and outbound packet chain
- C. Overview over SecureXL templated connections
- D. Network interfaces and core distribution used for CoreXL

**Answer: D**

**NEW QUESTION 132**

- (Exam Topic 3)

Which NAT rules are prioritized first?

- A. Post-Automatic/Manual NAT rules
- B. Manual/Pre-Automatic NAT
- C. Automatic Hide NAT
- D. Automatic Static NAT

**Answer: B**

**NEW QUESTION 134**

- (Exam Topic 3)

After trust has been established between the Check Point components, what is TRUE about name and IP-address changes?

- A. Security Gateway IP-address cannot be changed without re-establishing the trust.
- B. The Security Gateway name cannot be changed in command line without re-establishing trust.
- C. The Security Management Server name cannot be changed in SmartConsole without re-establishing trust.
- D. The Security Management Server IP-address cannot be changed without re-establishing the trust.

**Answer: A**

**NEW QUESTION 136**

- (Exam Topic 3)

In the Firewall chain mode FFF refers to:

- A. Stateful Packets
- B. No Match
- C. All Packets
- D. Stateless Packets

**Answer:** C

**NEW QUESTION 140**

- (Exam Topic 3)

In what way are SSL VPN and IPSec VPN different?

- A. SSL VPN is using HTTPS in addition to IKE, whereas IPSec VPN is clientless
- B. SSL VPN adds an extra VPN header to the packet, IPSec VPN does not
- C. IPSec VPN does not support two factor authentication, SSL VPN does support this
- D. IPSec VPN uses an additional virtual adapter; SSL VPN uses the client network adapter only.

**Answer:** D

**NEW QUESTION 141**

- (Exam Topic 3)

What is the command to show SecureXL status?

- A. fwaccel status
- B. fwaccel stats -m
- C. fwaccel -s
- D. fwaccel stat

**Answer:** D

**Explanation:**

To check overall SecureXL status: [Expert@HostName]# fwaccel stat References:

**NEW QUESTION 144**

- (Exam Topic 3)

With MTA (Mail Transfer Agent) enabled the gateways manages SMTP traffic and holds external email with potentially malicious attachments. What is required in order to enable MTA (Mail Transfer Agent) functionality in the Security Gateway?

- A. Threat Cloud Intelligence
- B. Threat Prevention Software Blade Package
- C. Endpoint Total Protection
- D. Traffic on port 25

**Answer:** B

**NEW QUESTION 147**

- (Exam Topic 3)

Ken wants to obtain a configuration lock from other administrator on R81 Security Management Server. He can do this via WebUI or via CLI.

Which command should he use in CLI? (Choose the correct answer.)

- A. remove database lock
- B. The database feature has one command lock database override.
- C. override database lock
- D. The database feature has two commands lock database override and unlock databas
- E. Both will work.

**Answer:** D

**NEW QUESTION 150**

- (Exam Topic 3)

How many layers make up the TCP/IP model?

- A. 2
- B. 7
- C. 6
- D. 4

**Answer:** D

**NEW QUESTION 152**

- (Exam Topic 3)

Which is NOT an example of a Check Point API?

- A. Gateway API
- B. Management API
- C. OPSEC SDK
- D. Threat Prevention API

**Answer:** A

**NEW QUESTION 157**

- (Exam Topic 3)

When attempting to start a VPN tunnel, in the logs the error "no proposal chosen" is seen numerous times. No other VPN-related entries are present. Which phase of the VPN negotiations has failed?

- A. IKE Phase 1
- B. IPSEC Phase 2
- C. IPSEC Phase 1
- D. IKE Phase 2

**Answer:** A

**NEW QUESTION 160**

- (Exam Topic 4)

Which pre-defined Permission Profile should be assigned to an administrator that requires full access to audit all configurations without modifying them?

- A. Auditor
- B. Read Only All
- C. Super User
- D. Full Access

**Answer:** B

**NEW QUESTION 161**

- (Exam Topic 4)

How would you enable VMAC Mode in ClusterXL?

- A. Cluster Object -> Edit -> ClusterXL and VRRP -> Use Virtual MAC
- B. fw ctl set int vmac\_mode 1
- C. cphaconf vmac\_mode set 1
- D. Cluster Object -> Edit -> Cluster Members -> Edit -> Use Virtual MAC

**Answer:** A

**Explanation:**

Reference: [https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit\\_doGoviewsolutiondetails=&solutionid=sk50840](https://supportcenter.checkpoint.com/supportcenter/portal?eventSubmit_doGoviewsolutiondetails=&solutionid=sk50840)

**NEW QUESTION 164**

- (Exam Topic 4)

If the Active Security Management Server fails or if it becomes necessary to change the Active to Standby, the following steps must be taken to prevent data loss. Providing the Active Security Management Server is responsive, which if these steps should NOT be performed:

- A. Rename the hostname of the Standby member to match exactly the hostname of the Active member.
- B. Change the Standby Security Management Server to Active.
- C. Change the Active Security Management Server to Standby.
- D. Manually synchronize the Active and Standby Security Management Servers.

**Answer:** A

**NEW QUESTION 165**

- (Exam Topic 4)

If SecureXL is disabled which path is used to process traffic?

- A. Passive path
- B. Medium path
- C. Firewall path
- D. Accelerated path

**Answer:** C

**NEW QUESTION 166**

- (Exam Topic 4)

After finishing installation admin John likes to use top command in expert mode. John has to set the expert-password and was able to use top command. A week later John has to use the top command again, He detected that the expert password is no longer valid. What is the most probable reason for this behavior?

- A. "write memory" was not issued on clish
- B. changes are only possible via SmartConsole
- C. "save config" was not issued in expert mode
- D. "save config" was not issued on clish

**Answer:** D

**NEW QUESTION 168**

- (Exam Topic 4)

A user complains that some Internet resources are not available. The Administrator is having issues seeing it packets are being dropped at the firewall (not seeing drops in logs). What is the solution to troubleshoot the issue?

- A. run fw unloadlocal" on the relevant gateway and check the ping again
- B. run "cpstop" on the relevant gateway and check the ping again
- C. run "fw log" on the relevant gateway
- D. run "fw ctl zdebug drop" on the relevant gateway

**Answer: D**

**NEW QUESTION 173**

- (Exam Topic 4)

Kurt is planning to upgrade his Security Management Server to R81.X. What is the lowest supported version of the Security Management he can upgrade from?

- A. R76 Splat
- B. R77.X Gaia
- C. R75 Splat
- D. R75 Gaia

**Answer: D**

**NEW QUESTION 177**

- (Exam Topic 4)

You work as a security administrator for a large company. CSO of your company has attended a security conference where he has learnt how hackers constantly modify their strategies and techniques to evade detection and reach corporate resources. He wants to make sure that his company has the tight protections in place. Check Point has been selected for the security vendor.

Which Check Point product protects BEST against malware and zero-day attacks while ensuring quick delivery of safe content to your users?

- A. IPS AND Application Control
- B. IPS, anti-virus and anti-bot
- C. IPS, anti-virus and e-mail security
- D. SandBlast

**Answer: D**

**NEW QUESTION 182**

- (Exam Topic 4)

After having saved the Clish Configuration with the "save configuration config.txt" command, where can you find the config.txt file?

- A. You will find it in the home directory of your user account (e.
- B. /home/adminV)
- C. You can locate the file via SmartConsole > Command Line.
- D. You have to launch the WebUI and go to "Config" -> "Export Config File" and specify the destination directory of your local file system
- E. You cannot locate the file in the file system since Clish does not have any access to the bash file system

**Answer: B**

**NEW QUESTION 186**

- (Exam Topic 4)

Choose the correct syntax to add a new host named "emailserver1" with IP address 10.50.23.90 using GAIa Management CLI?

- A. mgmt\_cli add host name "myHost12 ip" address 10.50.23.90
- B. mgmt\_cli add host name ip-address 10.50.23.90
- C. mgmt\_cli add host "emailserver1" address 10.50.23.90
- D. mgmt\_cli add host name "emailserver1" ip-address 10.50.23.90

**Answer: D**

**Explanation:**

Reference: <https://weekly-geekly.github.io/articles/339924/index.html>

**NEW QUESTION 189**

- (Exam Topic 4)

Hit Count is a feature to track the number of connections that each rule matches, which one is not benefit of Hit Count.

- A. Better understand the behavior of the Access Control Policy
- B. Improve Firewall performance - You can move a rule that has hit count to a higher position in the Rule Base
- C. Automatically rearrange Access Control Policy based on Hit Count Analysis
- D. Analyze a Rule Base - You can delete rules that have no matching connections

**Answer: C**

**NEW QUESTION 194**

- (Exam Topic 4)

Which upgrade method you should use upgrading from R80.40 to R81.10 to avoid any downtime?

- A. Zero Downtime Upgrade (ZDU)
- B. Connectivity Upgrade (CU)
- C. Minimal Effort Upgrade (ME)
- D. Multi-Version Cluster Upgrade (MVC)

**Answer:** D

**NEW QUESTION 198**

- (Exam Topic 4)

John detected high load on sync interface. Which is most recommended solution?

- A. For FTP connections – do not sync
- B. Add a second interface to handle sync traffic
- C. For short connections like http service – do not sync
- D. For short connections like icmp service – delay sync for 2 seconds

**Answer:** A

**NEW QUESTION 201**

- (Exam Topic 4)

What is required for a certificate-based VPN tunnel between two gateways with separate management systems?

- A. Mutually Trusted Certificate Authorities
- B. Shared User Certificates
- C. Shared Secret Passwords
- D. Unique Passwords

**Answer:** A

**NEW QUESTION 204**

- (Exam Topic 4)

What are the correct steps upgrading a HA cluster (M1 is active. M2 is passive) using Multi-Version Cluster(MVC) Upgrade?

- A. 1) Enable the MVC mechanism on both cluster members «cphaprob mvc on2) Upgrade the passive node M2 to R81.103) In SmartConsole
- B. change the version of the cluster object4) Install the Access Control Policy and make sure that the installation will not stop if installation on one cluster member fails5) After examine the cluster states upgrade node M1 to R81.106) On each Cluster Member, disable the MVC mechanism
- C. 1) Enable the MVC mechanism on both cluster members #cphaprob mvc on2) Upgrade the passive node M2 to R81.103) In SmartConsole
- D. change the version of the cluster object4) Install the Access Control Policy5) After examine the cluster states upgrade node M1 to R81.106) On each Cluster Member, disable the MVC mechanism and Install the Access Control Policy
- E. 1) In SmartConsole
- F. change the version of the cluster object2) Upgrade the passive node M2 to R81.103) Enable the MVC mechanism on the upgraded R81.10 Cluster Member M2 Wcphaconf mvc on4) Install the Access Control Policy and make sure that the installation will not stop if installation on one cluster member fails5) After examine the cluster states upgrade node M1 to R81.106) On each Cluster Member, disable the MVC mechanism and Install the Access Control Policy SmartConsole
- G. change the version of the cluster object
- H. 1) Upgrade the passive node M2 to R81.102) Enable the MVC mechanism on the upgraded R81.10 Cluster Member M2 ttcpchaconf mvc on3) In SmartConsole, change the version of the cluster object 4) Install the Access Control Policy5) After examine the cluster states upgrade node M1 to R81.106) On each Cluster Member, disable the MVC mechanism and Install the Access Control Policy upgrade the passive node M2 to R81.10

**Answer:** D

**NEW QUESTION 206**

- (Exam Topic 4)

You need to change the MAC-address on eth2 interface of the gateway. What command and what mode will you use to achieve this goal?

- A. set interface eth2 mac-addr 11:11:11:11:11:11; CLISH
- B. ifconfig eth1 hw 11:11:11:11:11:11; expert
- C. set interface eth2 hw-addr 11:11:11:11:11:11; CLISH
- D. ethtool -i eth2 mac 11:11:11:11:11:11; expert

**Answer:** A

**NEW QUESTION 207**

- (Exam Topic 4)

You need to change the MAC-address on eth2 interface of the gateway. What is the correct way to change MAC-address in Check Point Gaia?

- A. In CLISH run: set interface eth2 mac-addr 11:11:11:11:11:11
- B. In expert-mode run ifconfig eth1 hw 11:11:11:11 11 11
- C. In CLISH run set interface eth2 hw-addr 11 11 11:11:11 11
- D. In expert-mode run: ethtool -4 eth2 mac 11 11:11:11:11:11

**Answer:** A

**NEW QUESTION 211**

- (Exam Topic 4)

Alice works for a big security outsourcing provider company and as she receives a lot of change requests per day she wants to use for scripting daily (asks the API

services from Check Point for the Management API. Firstly she needs to be aware if the API services are running for the management. Which of the following Check Point Command is true:

- A. api mgmt status
- B. api status
- C. status api
- D. status mgmt apt

**Answer: B**

**NEW QUESTION 215**

- (Exam Topic 4)

How many versions, besides the destination version, are supported in a Multi-Version Cluster Upgrade?

- A. 1
- B. 3
- C. 2
- D. 4

**Answer: B**

**NEW QUESTION 220**

- (Exam Topic 4)


Due to high CPU workload on the Security Gateway, the security administrator decided to purchase a new multicore CPU to replace the existing single core CPU. After installation, is the administrator required to perform any additional tasks?

- A. Run cprestart from clish
- B. After upgrading the hardware, increase the number of kernel instances using cpconfig
- C. Administrator does not need to perform any tas
- D. Check Point will make use of the newly installed CPU and Cores
- E. Hyperthreading must be enabled in the bios to use CoreXL

**Answer: B**

**NEW QUESTION 223**

- (Exam Topic 4)

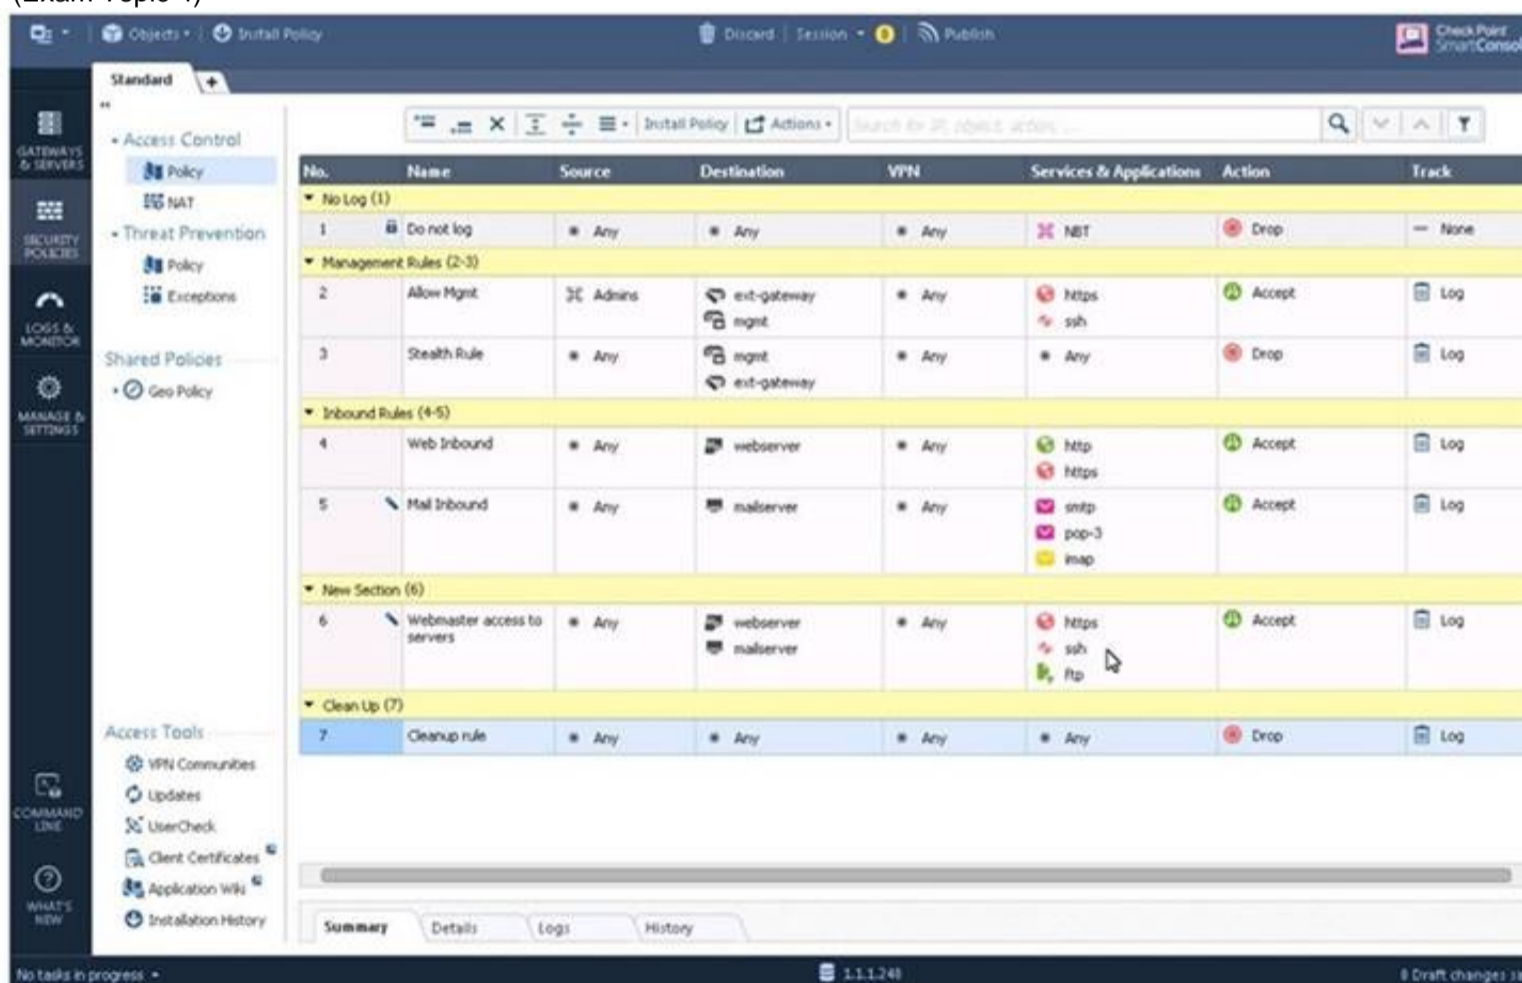

What can we infer about the recent changes made to the Rule Base?

- A. Rule 7 was created by the 'admin' administrator in the current session
- B. 8 changes have been made by administrators since the last policy installation
- C. The rules 1, 5 and 6 cannot be edited by the 'admin' administrator
- D. Rule 1 and object webserver are locked by another administrator

**Answer: D**

**NEW QUESTION 227**

- (Exam Topic 4)

Fill in the blanks: In the Network policy layer, the default action for the Implied last rule is \_\_\_\_\_ all traffic. However, in the Application Control policy layer, the default action is \_\_\_\_\_ all traffic.

- A. Accept; redirect
- B. Accept; drop
- C. Redirect; drop
- D. Drop; accept

**Answer: D**

**NEW QUESTION 231**

- (Exam Topic 4)

The Compliance Blade allows you to search for text strings in many windows and panes, to search for a value in a field, what would your syntax be?

- A. field\_name:string
- B. name field:string
- C. name\_field:string
- D. field name:string

**Answer: A**

**NEW QUESTION 232**

- (Exam Topic 4)

What should the admin do in case the Primary Management Server is temporary down?

- A. Use the VIP in SmartConsole you always reach the active Management Server.
- B. The Secondary will take over automatically Change the IP in SmartConsole to logon to the private IP of the Secondary Management Server.
- C. Run the 'promote\_util' to activate the Secondary Management server
- D. Logon with SmartConsole to the Secondary Management Server and choose "Make Active" under Actions in the HA Management Menu

**Answer: A**

**NEW QUESTION 237**

- (Exam Topic 4)

The WebUI offers several methods for downloading hotfixes via CPUSE except:

- A. Automatic
- B. Force override
- C. Manually
- D. Scheduled

**Answer: B**

**NEW QUESTION 239**

- (Exam Topic 4)

In the R81 SmartConsole, on which tab are Permissions and Administrators defined?

- A. Security Policies
- B. Logs and Monitor
- C. Manage and Settings
- D. Gateways and Servers

**Answer: C**

**NEW QUESTION 240**

- (Exam Topic 4)

When detected, an event can activate an Automatic Reaction. The SmartEvent administrator can create and configure one Automatic Reaction, or many, according to the needs of the system. Which of the following statement is false and NOT part of possible automatic reactions:

- A. Syslog
- B. SNMPTrap
- C. Block Source
- D. Mail

**Answer: B**

**NEW QUESTION 244**

- (Exam Topic 4)

What is the command used to activated Multi-Version Cluster mode?

- A. set cluster member mvc on in Clish
- B. set mvc on on Clish
- C. set cluster MVC on in Expert Mode
- D. set cluster mvc on in Expert Mode

**Answer: A**

**NEW QUESTION 246**

- (Exam Topic 4)

What is the recommended configuration when the customer requires SmartLog indexing for 14 days and SmartEvent to keep events for 180 days?

- A. Use Multi-Domain Management Server.
- B. Choose different setting for log storage and SmartEvent db
- C. Install Management and SmartEvent on different machines.
- D. it is not possible.

**Answer: C**

**NEW QUESTION 250**

- (Exam Topic 4)

You have created a rule at the top of your Rule Base to permit Guest Wireless access to the Internet. However, when guest users attempt to reach the Internet, they are not seeing the splash page to accept your Terms of Service, and cannot access the Internet. How can you fix this?

No.	Hits	Name	Source	Destination	VPN	Services & Applications	Action	Track
1	0	Guest Access	GuestUsers	* Any	* Any	* Any	Accept	Log

- A. Right click Accept in the rule, select "More", and then check 'Enable Identity Captive Portal'.
- B. On the firewall object, Legacy Authentication screen, check 'Enable Identity Captive Portal'.
- C. In the Captive Portal screen of Global Properties, check 'Enable Identity Captive Portal'.
- D. On the Security Management Server object, check the box 'Identity Logging'.

**Answer: A**

**NEW QUESTION 254**

- (Exam Topic 4)

When synchronizing clusters, which of the following statements is FALSE?

- A. The state of connections using resources is maintained in a Security Server, so their connections cannot be synchronized.
- B. Only cluster members running on the same OS platform can be synchronized.
- C. In the case of a failover, accounting information on the failed member may be lost despite a properly working synchronization.
- D. Client Authentication or Session Authentication connections through a cluster member will be lost if the cluster member fails.

**Answer: D**

**NEW QUESTION 256**

- (Exam Topic 4)

The Check Point history feature in R81 provides the following:

- A. View install changes and install specific version
- B. View install changes
- C. Policy Installation Date, view install changes and install specific version
- D. Policy Installation Date only

**Answer: D**

**NEW QUESTION 260**

- (Exam Topic 4)

True or False: In R81, more than one administrator can login to the Security Management Server with write permission at the same time.

- A. False, this feature has to be enabled in the Global Properties.
- B. True, every administrator works in a session that is independent of the other administrators.
- C. True, every administrator works on a different database that is independent of the other administrators.
- D. False, only one administrator can login with write permission.

**Answer: B**

**NEW QUESTION 264**

- (Exam Topic 4)

In Advanced Permanent Tunnel Configuration, to set the amount of time the tunnel test runs without a response before the peer host is declared 'down', you would set the ?

- A. life sign polling interval
- B. life sign timeout
- C. life\_sign\_polling\_interval
- D. life\_sign\_timeout

**Answer: D**

**Explanation:**

Reference: [https://sc1.checkpoint.com/documents/R77/CP\\_R77\\_VPN\\_AdminGuide/html\\_frameset.htm?topic=documents/R77/CP\\_R77\\_VPN\\_AdminGuide/14018](https://sc1.checkpoint.com/documents/R77/CP_R77_VPN_AdminGuide/html_frameset.htm?topic=documents/R77/CP_R77_VPN_AdminGuide/14018)

**NEW QUESTION 265**

- (Exam Topic 4)  
Besides fw monitor, what is another command that can be used to capture packets?

- A. arp
- B. traceroute
- C. tcpdump
- D. ping

**Answer: C**

**NEW QUESTION 266**

- (Exam Topic 4)  
Which firewall daemon is responsible for the FW CLI commands?

- A. fwd
- B. fwm
- C. cpm
- D. cpd

**Answer: A**

**NEW QUESTION 267**

- (Exam Topic 4)  
According to the policy installation flow the transfer state (CPTA) is responsible for the code generated by the FWM. On the Security Gateway side a process receives them and first stores them into a temporary directory. Which process is true for receiving these Tiles;

- A. FWD
- B. CPD
- C. FWM
- D. RAD

**Answer: A**

**NEW QUESTION 269**

- (Exam Topic 4)  
SmartEvent Security Checkups can be run from the following Logs and Monitor activity:

- A. Reports
- B. Advanced
- C. Checkups
- D. Views

**Answer: A**

**NEW QUESTION 273**

- (Exam Topic 4)  
What are the available options for downloading Check Point hotfixes in Gala WebUI (CPUSE)?

- A. Manually, Scheduled, Automatic
- B. Manually, Automatic, Disabled
- C. Manually, Scheduled, Disabled
- D. Manually, Scheduled, Enabled

**Answer: A**

**Explanation:**

Reference: [https://sc1.checkpoint.com/documents/R77/CP\\_R77\\_Gaia\\_AdminWebAdminGuide/html\\_frameset.htm?topic=documents/R77/CP\\_R77\\_Gaia\\_AdminWebAdminGuide/112109](https://sc1.checkpoint.com/documents/R77/CP_R77_Gaia_AdminWebAdminGuide/html_frameset.htm?topic=documents/R77/CP_R77_Gaia_AdminWebAdminGuide/112109)

**NEW QUESTION 276**

- (Exam Topic 4)  
Which of the following is a task of the CPD process?

- A. Invoke and monitor critical processes and attempts to restart them if they fail
- B. Transfers messages between Firewall processes
- C. Log forwarding
- D. Responsible for processing most traffic on a security gateway

**Answer: B**

**Explanation:**

[https://sc1.checkpoint.com/documents/R76/CP\\_R76\\_CLI\\_WebAdmin/12496.htm](https://sc1.checkpoint.com/documents/R76/CP_R76_CLI_WebAdmin/12496.htm)

**NEW QUESTION 278**

- (Exam Topic 4)

What two ordered layers make up the Access Control Policy Layer?

- A. URL Filtering and Network
- B. Network and Threat Prevention
- C. Application Control and URL Filtering
- D. Network and Application Control

**Answer:** D

**NEW QUESTION 281**

- (Exam Topic 4)

Which of the following processes pulls the application monitoring status from gateways?

- A. cpd
- B. cpwd
- C. cpm
- D. fwm

**Answer:** A

**NEW QUESTION 283**

- (Exam Topic 4)

While using the Gaia CLI, what is the correct command to publish changes to the management server?

- A. json publish
- B. mgmt publish
- C. mgmt\_cli commit
- D. commit

**Answer:** B

**NEW QUESTION 284**

- (Exam Topic 4)

You have enabled "Full Log" as a tracking option to a security rule. However, you are still not seeing any data type information. What is the MOST likely reason?

- A. Logging has disk space issue
- B. Change logging storage options on the logging server or Security Management Server properties and install database.
- C. Data Awareness is not enabled.
- D. Identity Awareness is not enabled.
- E. Logs are arriving from Pre-R81 gateways.

**Answer:** A

**NEW QUESTION 286**

- (Exam Topic 4)

How can you switch the active log file?

- A. Run fw logswitch on the gateway
- B. Run fwm logswitch on the Management Server
- C. Run fwm logswitch on the gateway
- D. Run fw logswitch on the Management Server

**Answer:** D

**NEW QUESTION 289**

- (Exam Topic 4)

When performing a minimal effort upgrade, what will happen to the network traffic?

- A. All connections that were Initiated before the upgrade will be dropped, causing network downtime.
- B. All connections that were initiated before the upgrade will be handled by the active gateway
- C. All connections that were initiated before the upgrade will be handled normally
- D. All connections that were initiated before the upgrade will be handled by the standby gateway

**Answer:** B

**NEW QUESTION 290**

- (Exam Topic 4)

What CLI utility runs connectivity tests from a Security Gateway to an AD domain controller?

- A. test\_connectivity\_ad -d <domain>
- B. test\_ldap\_connectivity -d <domain>
- C. test\_ad\_connectivity -d <domain>
- D. ad\_connectivity\_test -d <domain>

**Answer:** C

**Explanation:**

[https://sc1.checkpoint.com/documents/R81.30/WebAdminGuides/EN/CP\\_R81.30\\_CLI\\_ReferenceGuide/html\\_frameset.htm?topic=documents/R81.30/WebAdminGuides/EN/CP\\_R81.30\\_CLI\\_ReferenceGuide/200877](https://sc1.checkpoint.com/documents/R81.30/WebAdminGuides/EN/CP_R81.30_CLI_ReferenceGuide/html_frameset.htm?topic=documents/R81.30/WebAdminGuides/EN/CP_R81.30_CLI_ReferenceGuide/200877)

**NEW QUESTION 294**

- (Exam Topic 4)

Which Check Point process provides logging services, such as forwarding logs from Gateway to Log Server, providing Log Export API (LEA) & Event Logging API (EL-A) services.

- A. DASSERVICE
- B. FWD
- C. CPVIEWD
- D. CPD

**Answer:** A

**NEW QUESTION 299**

- (Exam Topic 4)

What mechanism can ensure that the Security Gateway can communicate with the Management Server with ease in situations with overwhelmed network resources?

- A. The corresponding feature is new to R81.10 and is called "Management Data Plane Separation"
- B. The corresponding feature is called "Dynamic Dispatching"
- C. There is a feature for ensuring stable connectivity to the management server and is done via Priority Queuing.
- D. The corresponding feature is called "Dynamic Split"

**Answer:** A

**NEW QUESTION 302**

- (Exam Topic 4)

IF the first packet of an UDP session is rejected by a rule definition from within a security policy (not including the clean up rule), what message is sent back through the kernel?

- A. Nothing
- B. TCP FIN
- C. TCP RST
- D. ICMP unreachable

**Answer:** A

**NEW QUESTION 303**

- (Exam Topic 4)

SmartConsole R81 x requires the following ports to be open for SmartEvent.

- A. 19009, 19090 & 443
- B. 19009, 19004 & 18190
- C. 18190 & 443
- D. 19009, 18190 & 443

**Answer:** D

**NEW QUESTION 306**

- (Exam Topic 4)

When a packet arrives at the gateway, the gateway checks it against the rules in the hop Policy Layer, sequentially from top to bottom, and enforces the first rule that matches a packet. Which of the following statements about the order of rule enforcement is true?

- A. If the Action is Accept, the gateway allows the packet to pass through the gateway.
- B. If the Action is Drop, the gateway continues to check rules in the next Policy Layer down.
- C. If the Action is Accept, the gateway continues to check rules in the next Policy Layer down.
- D. If the Action is Drop, the gateway applies the Implicit Clean-up Rule for that Policy Layer.

**Answer:** C

**NEW QUESTION 311**

- (Exam Topic 4)

What are possible Automatic Reactions in SmartEvent?

- A. Mail
- B. SNMP Trap, Block Source
- C. Block Event Activity, External Script
- D. Web Mail
- E. Block Destination, SNMP Trap
- F. SmartTask
- G. Web Mail, Block Service
- H. SNMP Trap
- I. SmartTask, Geo Protection
- J. Web Mail, Forward to SandBlast Appliance, SNMP Trap, External Script

**Answer: A**

**NEW QUESTION 313**

- (Exam Topic 4)

To optimize Rule Base efficiency, the most hit rules should be where?

- A. Removed from the Rule Base.
- B. Towards the middle of the Rule Base.
- C. Towards the top of the Rule Base.
- D. Towards the bottom of the Rule Base.

**Answer: C**

**NEW QUESTION 314**

- (Exam Topic 4)

What is the amount of Priority Queues by default?

- A. There are 8 priority queues and this number cannot be changed.
- B. There is no distinct number of queues since it will be changed in a regular basis based on its system requirements.
- C. There are 7 priority queues by default and this number cannot be changed.
- D. There are 8 priority queues by default, and up to 8 additional queues can be manually configured

**Answer: D**

**NEW QUESTION 316**

- (Exam Topic 4)

What are the two modes for SNX (SSL Network Extender)?

- A. Network Mode and Application Mode
- B. Visitor Mode and Office Mode
- C. Network Mode and Hub Mode
- D. Office Mode and Hub Mode

**Answer: A**

**NEW QUESTION 317**

- (Exam Topic 4)

What command is used to manually failover a cluster during a zero downtime upgrade?

- A. set cluster member down
- B. cpstop
- C. clusterXL\_admin down
- D. set clusterXL down

**Answer: C**

**NEW QUESTION 319**

- (Exam Topic 4)

Which of the following Central Deployment is NOT a limitation in R81.10 SmartConsole?

- A. Security Gateway Clusters in Load Sharing mode
- B. Dedicated Log Server
- C. Dedicated SmartEvent Server
- D. Security Gateways/Clusters in ClusterXL HA new mode

**Answer: D**

**NEW QUESTION 322**

- (Exam Topic 4)

What are not possible commands to acquire the lock in order to make changes in Clish or Web GUI?

- A. set config-lock on override
- B. Click the Lock icon in the WebUI
- C. "set rbac rw = 1"
- D. lock database override

**Answer: C**

**NEW QUESTION 325**

- (Exam Topic 4)

In the Check Point Security Management Architecture, which component(s) can store logs?

- A. SmartConsole
- B. Security Management Server and Security Gateway
- C. Security Management Server

D. SmartConsole and Security Management Server

**Answer: B**

**NEW QUESTION 330**

- (Exam Topic 4)

Check Point ClusterXL Active/Active deployment is used when:

- A. Only when there is Multicast solution set up.
- B. There is Load Sharing solution set up.
- C. Only when there is Unicast solution set up.
- D. There is High Availability solution set up.

**Answer: D**

**NEW QUESTION 332**

- (Exam Topic 4)

Fill in the blank: Authentication rules are defined for \_\_\_\_\_ .

- A. User groups
- B. Users using UserCheck
- C. Individual users
- D. All users in the database

**Answer: A**

**NEW QUESTION 336**

- (Exam Topic 4)

Which one of the following is NOT a configurable Compliance Regulation?

- A. GLBA
- B. CJIS
- C. SOCI
- D. NCIPA

**Answer: C**

**NEW QUESTION 341**

.....

## Thank You for Trying Our Product

\* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

\* One year free update

You can enjoy free update one year. 24x7 online support.

\* Trusted by Millions

We currently serve more than 30,000,000 customers.

\* Shop Securely

All transactions are protected by VeriSign!

**100% Pass Your 156-315.81 Exam with Our Prep Materials Via below:**

<https://www.certleader.com/156-315.81-dumps.html>