

Exam Questions 300-610

Designing Cisco Data Center Infrastructure (DCID)

<https://www.2passeasy.com/dumps/300-610/>



NEW QUESTION 1

Drag the requirements from the left onto the correct policy types on the right.

Support tagging policies.

Scrub disks on disassociation.

Synchronize server power state.

Create a utility partition on a SD card.

Implement Hypervisor password policies.

Cisco Intersight Global Policy

Cisco UCS Manager Local Policy

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Support tagging policies.

Scrub disks on disassociation.

Synchronize server power state.

Create a utility partition on a SD card.

Implement Hypervisor password policies.

Cisco Intersight Global Policy

Implement Hypervisor password policies.

Synchronize server power state.

Support tagging policies.


Cisco UCS Manager Local Policy

Scrub disks on disassociation.

Create a utility partition on a SD card.

NEW QUESTION 2

Refer to the exhibit.

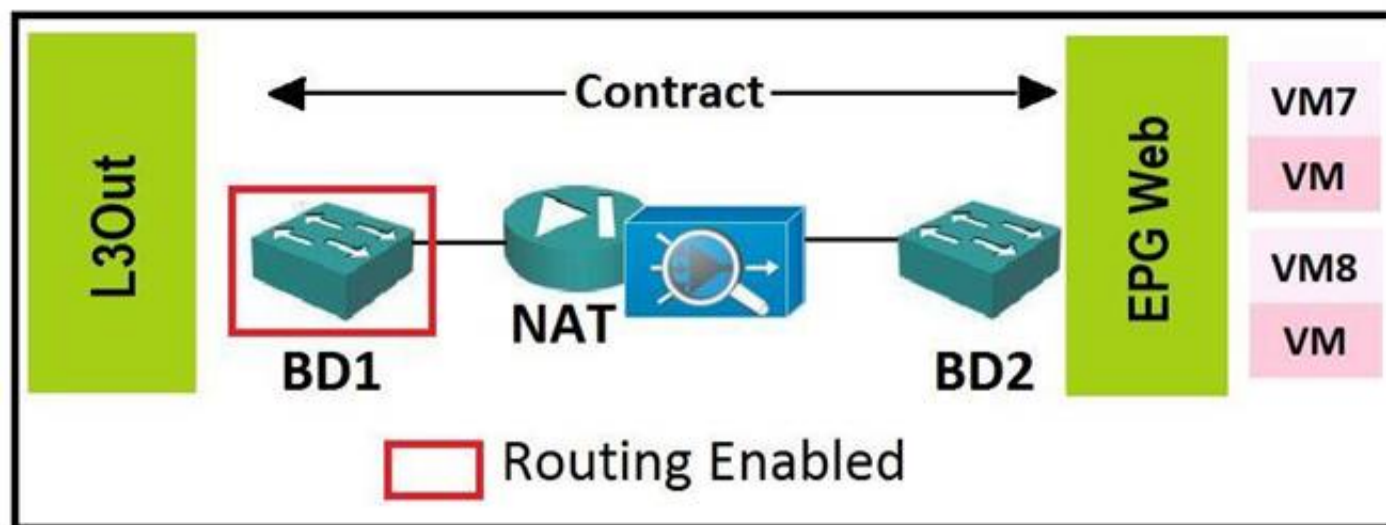

What must be the default gateway of the servers in EPG Web?

- A. subnet address of BD1
- B. subnet address of L3Out
- C. subnet address of BD2
- D. NAT appliance

Answer: D

NEW QUESTION 3

Where does Cisco UCS handle Fibre Channel traffic failover?

- A. on a Cisco UCS Fabric Interconnect ASIC in Fibre Channel switching mode
- B. on the host, by using multipathing software
- C. in the hardware on the Cisco UCS VIC 12xx adapter or later
- D. in the hardware on any Cisco UCS VIC adapter

Answer: B

NEW QUESTION 4

Which two types of service profile templates does Cisco UCS support? (Choose two.)

- A. initial
- B. permanent
- C. updating
- D. temporary
- E. connected

Answer: AC

NEW QUESTION 5

What is an advantage of Cisco HyperFlex Edge as compared to Cisco HyperFlex Standard Clusters?

- A. Cisco Intersight automatically creates an invisible cloud witness.
- B. Cisco UCS 5108 Blade Server chassis provides SEEPROM connectivity to solve split-brain scenarios.
- C. Cisco UCS Manager provides service profile portability across nodes.
- D. Cisco HyperFlex Edge provides native container support through the KVM hypervisor.

Answer: A

NEW QUESTION 6


Drag and drop the SAN components from the left onto the correct design considerations on the right.

fabric logins	used to logically separate a SAN fabric
ISL	must be considered for the end-to-end oversubscription ratio
VSAN	these exchanges increase as a result of server virtualization
zone	must be considered when implementing access control

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

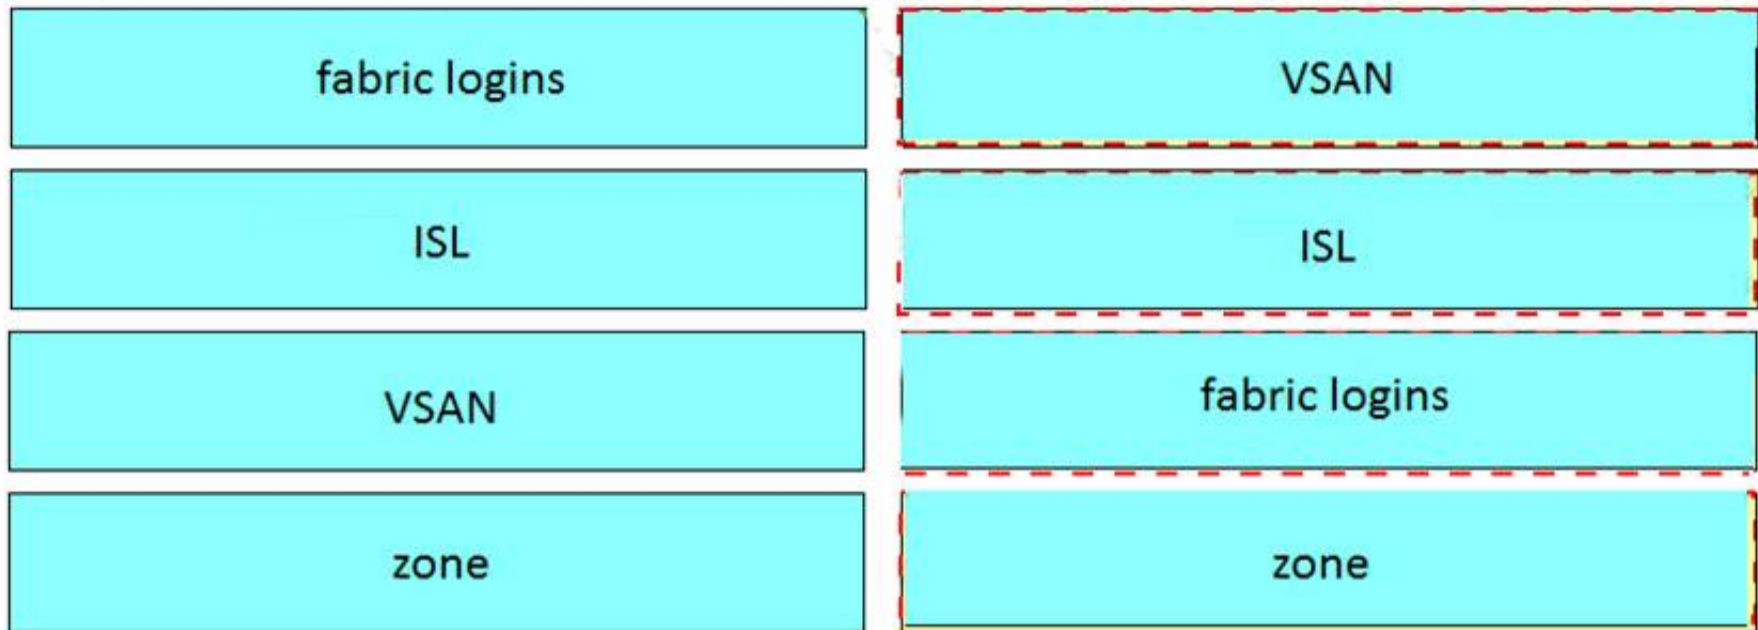

NEW QUESTION 7

What is the disadvantage of asynchronous storage replication as compared to synchronous storage replication in a disaster recovery design?

- A. reduction in application performance
- B. distance limitations
- C. specific backup requirements
- D. potential data loss

Answer: D

NEW QUESTION 8

Which two configuration methods can be used to deploy QoS to Cisco MDS Series switches? (Choose two.)

- A. zone-based QoS
- B. multiple QoS policies that match individual devices
- C. VSAN-based QoS
- D. FCoE VLAN-based QoS
- E. multiple QoS policies that match multiple devices

Answer: AC

NEW QUESTION 9

Refer to the exhibit.

Create vHBA Template

Name

:

Description

:

Fabric ID

:

☒ A

☐ B

Redundancy

:

Redundancy Type

:

☒ No Redundancy

☐ Primary Template

☐ Secondary Template

Select VSAN

:

default

▼

Create VSAN

Template Type

:

☒ Initial Template

☐ Updating Template

Max Data Field Size

:

2048

WWPN Pool

:

Select (pool default used by default)

▼

QoS Policy

:

<not set>

▼

Pin Group

:

<not set>

▼

Stats Threshold Policy

:

default

▼

Which template is used when a vHBA template pair is created for a specific server that inherits its attributes from an existing template?

- A. Secondary
- B. Initial
- C. Updating

D. Primary

Answer: B

NEW QUESTION 10

A Cisco UCS instance has four interfaces on a UCS VIC. Where on the fabric interconnect does each interface terminate?

- A. vPC
- B. virtual interface
- C. port channel
- D. physical port

Answer: B

NEW QUESTION 10

Drag and drop the technologies from the left onto the correct descriptions on the right.

iSCSI	allows the storage system to tell the client which paths are optimized
TOE	provides block-level access to the storage
MPIO	host software has visibility into different iSCSI ports
ALUA	offloads device CPU from encapsulation / decapsulation

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

iSCSI	ALUA
TOE	iSCSI
MPIO	MPIO
ALUA	TOE

NEW QUESTION 13

An engineer is designing a data center that uses FCIP. How is QoS configured in this environment?

- A. A separate DSCP value and CoPP must be configured for all FCIP traffic and another for all of the FCIP in the data connection.
- B. A separate DSCP value must be configured for all FCIP VSAN traffic.
- C. A separate DSCP value and priority queuing must be configured for all FCIP traffic.
- D. Two separate DSCP values must be configured, one for all of the FCIP frames in the control TCP connection and another for all of the FCIP frames in the data connection.

Answer: D

NEW QUESTION 18

Which feature must be configured to connect a classical Ethernet network to a data center network so that the data center network appears to be one large switch.

- A. VPC+
- B. UDLD

- C. EVPN
- D. OSPF

Answer: C

NEW QUESTION 20

Drag and drop the Cisco Nexus 7000 Series Switch resources from the left onto the correct groups on the right.

physical interfaces

port channels

TCAM

VLANs

Resources that are local to a VDC

Resources shared among all VDCs

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

physical interfaces

port channels

TCAM

VLANs

Resources that are local to a VDC

physical interfaces

VLANs

port channels

Resources shared among all VDCs

TCAM

NEW QUESTION 24

Drag and drop the data center technologies from the left onto the correct descriptions on the right. Not all technologies are used.

cut-through switching	connects a classical Ethernet vPC domain and a Cisco FabricPath cloud to interoperate
OTV	extends Layer 2 domains across distributed data centers
store-and-forward switching	performs Layer 2 lookup as soon as the destination MAC is received
VPC	two separate control planes, performs device aggregation
VPC+	

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

cut-through switching	VPC+
OTV	OTV
store-and-forward switching	cut-through switching
VPC	VPC
VPC+	

NEW QUESTION 27


Drag and drop the components from the left onto the descriptions on the right that indicate what occurs to Fibre Channel fabric when that component fails.

fabric interconnect	The Fibre Channel fabric fails for all of the connected Cisco UCS chassis.
FEX	The Fibre Channel fabric fails for one Cisco UCS chassis.
FEX link of the fabric interconnect	The Fibre Channel fabric fails for some of the servers within a Cisco UCS chassis.
converged network adapter	The Fibre Channel fabric fails for one server.

- A. Mastered
 B. Not Mastered

Answer: A

Explanation:

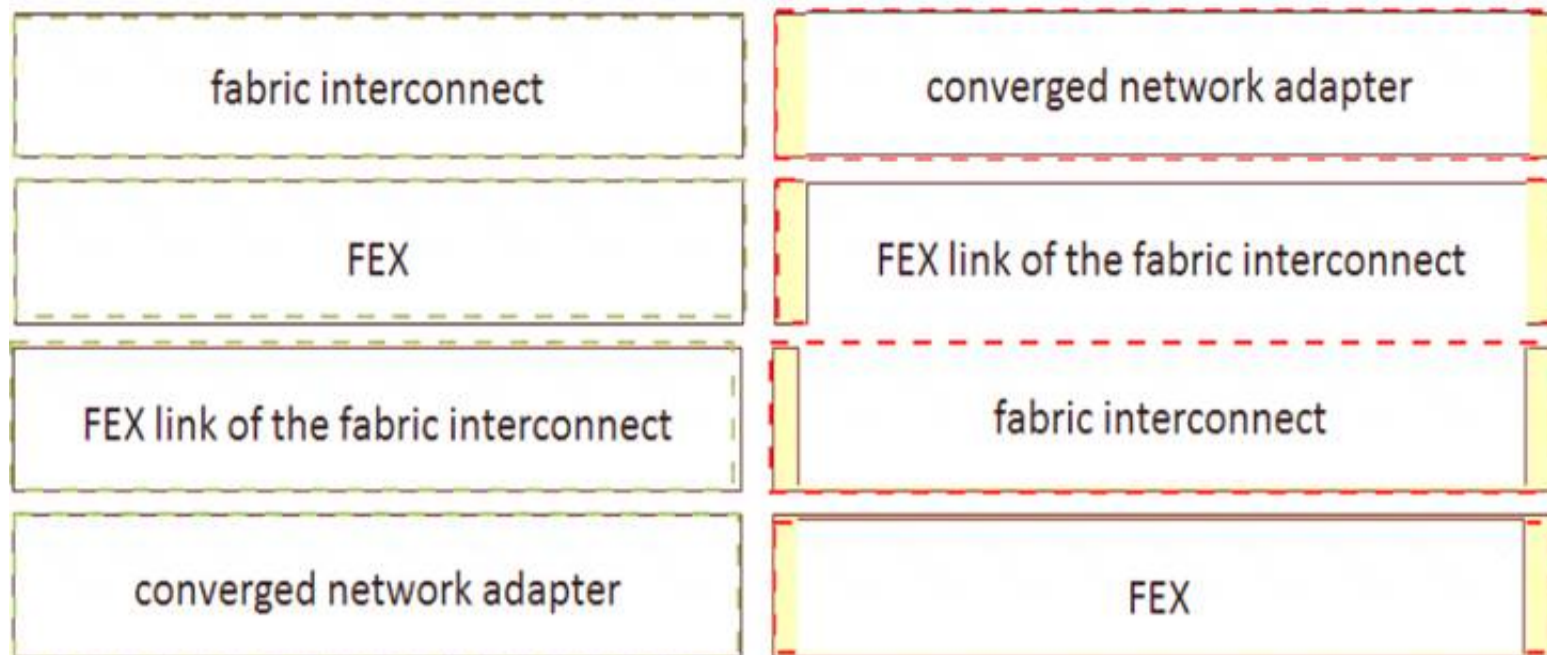

NEW QUESTION 28

Which Ethernet to Cisco Fabric Interconnect connectivity configuration is supported when FCoE is implemented?

- A. VSS that has unified uplinks
- B. Ethernet and unified ports on the same port channel
- C. vPC that has unified uplinks
- D. cross-connections with pinning

Answer: C

NEW QUESTION 29

What is an advantage of using OTV as compared to VPLS for data center redundancy?

- A. prevents loops on point-to-point links
- B. provides head-end replication
- C. uses a proactive MAC advertisement
- D. provides full-mesh connectivity

Answer: A

NEW QUESTION 30

Which two statements describe Ethernet switching mode on Cisco UCS 6100 Series Fabric Interconnects? (Choose two.)

- A. STP runs on the uplink ports of each VLAN, as defined by PVSTP+.
- B. STP runs on the uplink ports of each VLAN, as defined by MSTP.
- C. The STP parameter configuration is unsupported.
- D. The STP parameter configuration is supported.
- E. STP runs on the server ports.

Answer: AC

NEW QUESTION 34

Which two automation requirements can be met by using Puppet? (Choose two.)

- A. Push configuration updates immediately to servers.
- B. Enable clients to pull changes to configuration files.
- C. Enable clients to pull changes without installing an agent.
- D. Provide support for writing new modules in Python.
- E. Enable one-off infrastructure changes to be performed manually.

Answer: AB

NEW QUESTION 35

Which two configurations are available by using a service profile template in Cisco UCS Manager? (Choose two.)

- A. number of vHBAs
- B. ARP entries
- C. UUID assignment
- D. VXLAN membership
- E. target server

Answer: AC

NEW QUESTION 40

What are two advantages of using Cisco vPC over traditional access layer designs? (Choose two.)

- A. supports Layer 3 port channels
- B. disables spanning-tree
- C. no spanning-tree blocked ports
- D. uses all available uplink bandwidth
- E. maintains single control plane

Answer: CD

NEW QUESTION 41

Drag the appropriate from the left onto the current UDLD modes of operation on the right.

Uses STP if UDLD information times out.

Detects when a port is stuck.

Disables a port that has a high error rate.

Allows a port that has a high error rate.

Normal Mode

Aggressive Mode

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Uses STP if UDLD information times out.

Detects when a port is stuck.

Disables a port that has a high error rate.

Allows a port that has a high error rate.

Normal Mode

Uses STP if UDLD information times out.

Allows a port that has a high error rate.

Aggressive Mode

Detects when a port is stuck.

Disables a port that has a high error rate.

NEW QUESTION 46

Which orchestration tool should be used for the management and analytics of servers across multiple sites?

- A. Cisco Intersight
- B. Cisco Nexus Fabric Manager
- C. Cisco UCS Manager
- D. Cisco Data Center Network Manager

Answer: A

NEW QUESTION 48

An engineer deploys LISP VM mobility. Which feature is configured on the interfaces that have VM mobility enabled?

- A. IP redirects
- B. flow control
- C. proxy ARP
- D. HSRP

Answer: C

NEW QUESTION 52

What is a design consideration when implementing FSPF?

- A. Routes are based on the domain ID.
- B. Routes are based on the distance vector protocol.
- C. FSPF runs only on F Ports.
- D. FSPF runs on a per-chassis basis.

Answer: A

NEW QUESTION 55

Which two vSphere features must be included in the design of a Cisco HyperFlex systems stretched cluster? (Choose two.)

- A. HA
- B. VSS
- C. FT
- D. VDP
- E. DRS

Answer: AE

NEW QUESTION 58

Which pools are used when a vNIC template is created in Cisco UCS Manager?

- A. WWPN
- B. UUID
- C. MAC
- D. IP

Answer: C

NEW QUESTION 63

Which authentication software natively runs within the CLI of Cisco NX-OS devices?

- A. Python
- B. Ansible
- C. Puppet
- D. Chef

Answer: B

NEW QUESTION 67

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 300-610 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 300-610 Product From:

<https://www.2passeasy.com/dumps/300-610/>

Money Back Guarantee

300-610 Practice Exam Features:

- * 300-610 Questions and Answers Updated Frequently
- * 300-610 Practice Questions Verified by Expert Senior Certified Staff
- * 300-610 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-610 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year