

Cisco

Exam Questions 300-430

Implementing Cisco Enterprise Wireless Networks (ENWLSI)



NEW QUESTION 1

A corporation has recently implemented a BYOD policy at their HQ. Which two risks should the security director be concerned about? (Choose two.)

- A. network analyzers
- B. malware
- C. lost and stolen devices
- D. keyloggers
- E. unauthorized users

Answer: BC

NEW QUESTION 2

Which two restrictions are in place with regards to configuring mDNS? (Choose two.)

- A. mDNS uses only UDP port 5436 as a destination port.
- B. mDNS cannot use UDP port 5353 as the destination port.
- C. mDNS is not supported on FlexConnect APs with a locally switched WLAN.
- D. Controller software must be newer than 7.0.6+.
- E. mDNS is not supported over IPv6.

Answer: CD

NEW QUESTION 3

An engineer configures the wireless LAN controller to perform 802.1x user authentication. Which configuration must be enabled to ensure that client devices can connect to the wireless, even when WLC cannot communicate with the RADIUS?

- A. pre-authentication
- B. local EAP
- C. authentication caching
- D. Cisco Centralized Key Management

Answer: B

NEW QUESTION 4

Which two statements about the requirements for a Cisco Hyperlocation deployment are true? (Choose two.)

- A. After enabling Cisco Hyperlocation on Cisco CMX, the APs and the wireless LAN controller must be restarted.
- B. NTP can be configured, but that is not recommended.
- C. The Cisco Hyperlocation feature must be enabled on the wireless LAN controller and Cisco CMX.
- D. The Cisco Hyperlocation feature must be enabled only on the wireless LAN controller.
- E. If the Cisco CMX server is a VM, a high-end VM is needed for Cisco Hyperlocation deployments.

Answer: AC

NEW QUESTION 5

An engineer must use Cisco AVC on a Cisco WLC to prioritize Cisco IP cameras that use the wireless network. Which element do you configure in a rule?

- A. permit-ACL
- B. WMM required
- C. mark
- D. rate-limit

Answer: C

NEW QUESTION 6

An engineer wants to configure WebEx to adjust the precedence and override the QoS profile on the WLAN. Which configuration is needed to complete this task?

- A. Change the WLAN reserved bandwidth for WebEx
- B. Create an AVC profile for WebEx
- C. Create an ACL for WebEx
- D. Change the AVC application WebEx-app-sharing to mark

Answer: B

NEW QUESTION 7

Which three properties are used for client profiling of wireless clients? (Choose three.)

- A. HTTP user agent
- B. DHCP
- C. MAC OUI
- D. hostname
- E. OS version
- F. IP address

Answer:

ABC

NEW QUESTION 8

Which command set configures a Cisco Catalyst 9800 Series Wireless Controller so that the client traffic enters the network at the AP switch port?

A.

```
config terminal
wireless profile policy [policy name]
local switching
end
```

B.

```
config terminal
wireless flexconnect policy [policy name]
local switching
end
```

A. **config terminal**

```
wireless flexconnect policy [policy name]
no central switching
end
```

B. **config terminal**

```
wireless profile policy [policy name]
no central switching
end
```

Answer: B

NEW QUESTION 9

For security purposes, an engineer enables CPU ACL and chooses an ACL on the Security > Access Control Lists > CPU Access Control Lists menu. Which kind of traffic does this change apply to, as soon as the change is made?

- A. wireless traffic only
- B. wired traffic only
- C. VPN traffic
- D. wireless and wired traffic

Answer: A

NEW QUESTION 10

An engineer must implement Cisco Identity-Based Networking Services at a remote site using ISE to dynamically assign groups of users to specific IP subnets. If the subnet assigned to a client is available at the remote site, then traffic must be offloaded locally, and subnets are unavailable at the remote site must be tunneled back to the WLC. Which feature meets these requirements?

- A. learn client IP address
- B. FlexConnect local authentication
- C. VLAN-based central switching
- D. central DHCP processing

Answer: C

NEW QUESTION 10

Which devices can be tracked with the Cisco Context Aware Services?

- A. wired and wireless devices
- B. wireless devices
- C. wired devices
- D. Cisco certified wireless devices

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/wireless/context-aware-software/110836-cas-faq.html>

NEW QUESTION 15

All APs are receiving multicast traffic, instead of only the APs that need it. What is the cause of this problem?

- A. The multicast group includes all APs
- B. The wrong multicast address was used
- C. The multicast group is assigned the wrong VLAN

D. Multicast IGMP snooping is not enabled

Answer: D

NEW QUESTION 19

Which two events are outcomes of a successful RF jamming attack? (Choose two.)

- A. disruption of WLAN services
- B. unauthentication association
- C. deauthentication broadcast
- D. deauthentication multicast
- E. physical damage to AP hardware

Answer: AE

NEW QUESTION 24


Which two steps are needed to complete integration of the MSE to Cisco Prime Infrastructure and be able to track the location of clients/rogues on maps? (Choose two.)

- A. Synchronize access points with the MSE.
- B. Add the MSE to Cisco Prime Infrastructure using the CLI credentials.
- C. Add the MSE to Cisco Prime Infrastructure using the Cisco Prime Infrastructure communication credentials configured during set up.
- D. Apply a valid license for Wireless Intrusion Prevention System.
- E. Apply a valid license for location tracking.

Answer: DE

NEW QUESTION 27

Refer to the exhibit. An engineer must connect a fork lift via a WGB to a wireless network and must authenticate the WGB certificate against the RADIUS server. Which three steps are required for this configuration? (Choose three.)

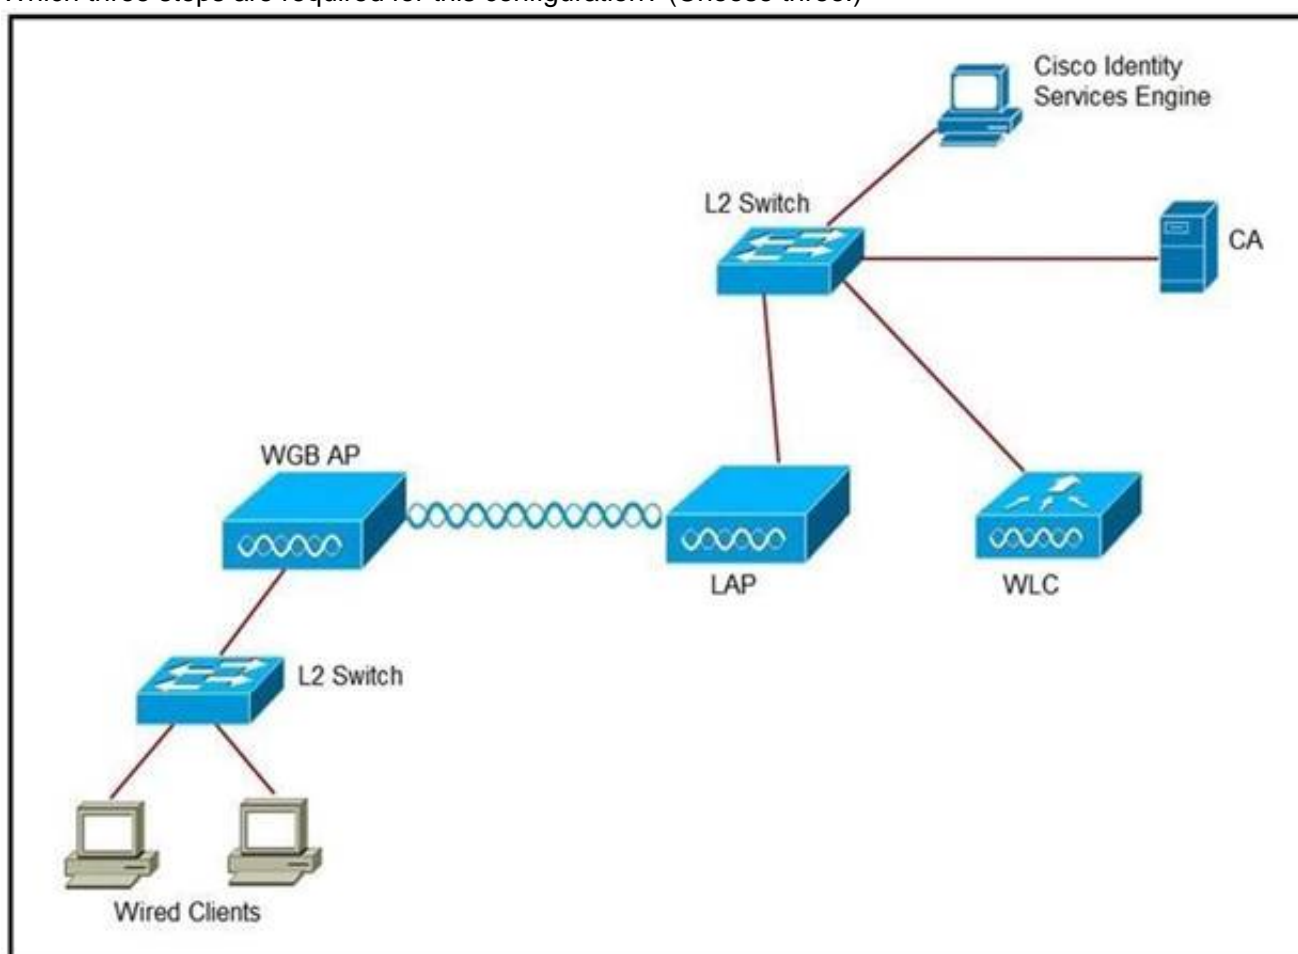

- A. Configure the certificate, WLAN, and radio interface on WGB.
- B. Configure the certificate on the WLC.
- C. Configure WLAN to authenticate using ISE.
- D. Configure the access point with the root certificate from ISE.
- E. Configure WGB as a network device in ISE.
- F. Configure a policy on ISE to allow devices to connect that validate the certificate.

Answer: ACF

NEW QUESTION 31

On a branch office deployment, it has been noted that if the FlexConnect AP is in standalone mode and loses connection to the WLC, all clients are disconnected, and the SSID is no longer advertised. Considering that FlexConnect local switching is enabled, which setting is causing this behavior?

- A. ISE NAC is enabled
- B. 802.11r Fast Transition is enabled
- C. Client Exclusion is enabled
- D. FlexConnect Local Auth is disabled

Answer: D

NEW QUESTION 33

An engineer must implement rogue containment for an SSID. What is the maximum number of APs that should be used for containment?

- A. 1
- B. 2
- C. 3
- D. 4

Answer: D

Explanation:

Reference: https://www.cisco.com/c/en/us/td/docs/wireless/technology/roguedetection_deploy/Rogue_Detection.html

NEW QUESTION 34

What is the default NMSP echo interval between Cisco MSE and a Wireless LAN Controller?

- A. 10 seconds
- B. 15 seconds
- C. 30 seconds
- D. 60 seconds

Answer: B

Explanation:

Reference: https://www.cisco.com/en/US/docs/wireless/mse/3350/6.0/CAS/configuration/guide/msecg_ch4_CAS.html

NEW QUESTION 37

An engineer configures a Cisco Aironet 600 Series OfficeExtend AP for a user who works remotely. What is configured on the Cisco WLC to allow the user to print a printer on his home network?

- A. split tunneling
- B. SE-connect
- C. FlexConnect
- D. AP failover priority

Answer: A

Explanation:

Reference: <https://www.cisco.com/c/en/us/support/docs/wireless/aironet-602-officeextend-access-point/117540-configure-splittunneloeap-00.html>

NEW QUESTION 41

A customer is experiencing performance issues with its wireless network and asks a wireless engineer to provide information about all sources of interference and their impacts to the wireless network over the past few days. Where can the requested information be accessed?

- A. CleanAir reports on Cisco Prime Infrastructure
- B. Performance reports on Cisco Prime Infrastructure
- C. Interference Devices reports on Cisco Wireless LAN Controller
- D. Air Quality reports on Cisco Wireless LAN Controller

Answer: A

NEW QUESTION 45

A FlexConnect remote office deployment is using five 2702i APs indoors and two 1532i APs outdoors. When a code upgrade is performed and FlexConnect Smart AP Image Upgrade is leveraged, but no FlexConnect Master AP has been configured, how many image transfers between the WLC and APs will occur?

- A. 1
- B. 2
- C. 5
- D. 7

Answer: B

NEW QUESTION 47

Which three characteristics of a rogue AP pose a high security risk? (Choose three.)

- A. open authentication
- B. high RSSI
- C. foreign SSID
- D. accepts clients
- E. low RSSI
- F. distant location

Answer: ACD

NEW QUESTION 48

Refer to the exhibit. An engineer is creating an ACL to restrict some traffic to the WLC CPU. Which selection must be made from the direction drop-down list?

Access Control Lists > Rules > New

| | |
|-------------|--|
| Sequence | <input type="text"/> |
| Source | <input type="text" value="Any"/> |
| Destination | <input type="text" value="Any"/> |
| Protocol | <input type="text" value="Any"/> |
| DSCP | <input type="text" value="Any"/> |
| Direction | <input type="text" value="Any"/> |
| Action | <div> <div>Any</div> <div>Inbound</div> <div>Outbound</div> </div> |

- A. It must be Inbound because traffic goes to the WLC.
- B. Packet direction has no significance; it is always Any.
- C. It must be Outbound because it is traffic that is generated from the WLC.
- D. To have the complete list of options, the CPU ACL must be created only by the CLI.

Answer: A

NEW QUESTION 51

During the EAP process and specifically related to the client authentication session, which encrypted key is sent from the RADIUS server to the access point?

- A. WPA key
- B. session key
- C. encryption key
- D. shared-secret key

Answer: B

NEW QUESTION 56

What is an important consideration when implementing a dual SSID design for BYOD?

- A. After using the provisioning SSID, an ACL that used to make the client switch SSIDs forces the user to associate and traverse the network by MAC filtering.
- B. If multiple WLCs are used, the WLAN IDs must be exact for the clients to be provisioned and traverse the network correctly.
- C. SSIDs for this setup must be configured with NAC State-RADIUS NAC for the clients to authenticate with Cisco ISE, or with NAC State-ISE NAC for Cisco ISE to associate the client.
- D. One SSID is for provisioning and the other SSID is for gaining access to the network.
- E. The use of an ACL should not be enforced to make the client connect to the REAL SSID after provisioning.

Answer: D

NEW QUESTION 60

Which two protocols are used to communicate between the Cisco MSE and the Cisco Prime Infrastructure network management software? (Choose two.)

- A. HTTPS
- B. Telnet
- C. SOAP
- D. SSH
- E. NMSP

Answer: AE

NEW QUESTION 64

An engineer is configuring multicast for wireless for an all-company video meeting on a network using EIGRP and BGP within a single domain from a single source. Which type of multicast routing should be implemented?

- A. Protocol Independent Multicast Dense Mode
- B. Source Specific Multicast
- C. Multicast Source Discovery Protocol
- D. Protocol Independent Multicast Sparse Mode

Answer: D

NEW QUESTION 69

An engineer configured a Cisco AireOS controller with two TACACS+ servers. The engineer notices that when the primary TACACS+ server fails, the WLC starts using the secondary server as expected, but the WLC does not use the primary server again until the secondary server fails or the controller is rebooted. Which cause of this issue is true?

- A. Fallback is enabled
- B. Fallback is disabled
- C. DNS query is disabled
- D. DNS query is enabled

Answer: B

NEW QUESTION 70

A Cisco WLC has been added to the network and Cisco ISE as a network device, but authentication is failing. Which configuration within the network device configuration should be verified?

- A. SNMP RO community
- B. device interface credentials
- C. device ID
- D. shared secret

Answer: D

NEW QUESTION 75

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

300-430 Practice Exam Features:

- * 300-430 Questions and Answers Updated Frequently
- * 300-430 Practice Questions Verified by Expert Senior Certified Staff
- * 300-430 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 300-430 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 300-430 Practice Test Here](#)